



(51) International Patent Classification:

E21B 33/13 (2006.01) *E21B 23/08* (2006.01)
E21B 33/16 (2006.01)

(21) International Application Number:

PCT/US2013/070036

(22) International Filing Date:

14 November 2013 (14.11.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 10200 Bellaire Boulevard, Houston, Texas 77072 (US).

(72) Inventors: **TELFER, Stuart Alexander**; 9 Glenury Road, Stonehaven Aberdeenshire AB39 3LB (GB). **RENSHAW, William Shaun**; 160 Magrath Road, Apt. 326, Edmonton, Alberta T6R 3T7 (CA).

(74) Agents: **PRATT, John S.** et al.; Kilpatrick Townsend & Stockton LLP, 1100 Peachtree Street, Suite 2800, Atlanta, Georgia 30309 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: WINDOW ASSEMBLY WITH BYPASS RESTRICTOR

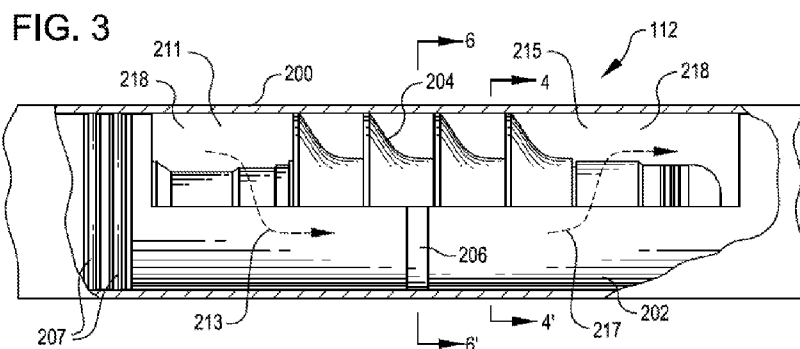

(57) Abstract: In some aspects, a downhole assembly is provided that can include a window joint positioned within a tubular element and a bypass restrictor. The bypass restrictor can be positioned in an annulus between an outer surface of the window joint and an inner surface of the tubular element. The bypass restrictor can restrict the flow of a pressurized fluid via the annulus from a first end to a second end of a wiper plug.

