

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 November 2003 (20.11.2003)

PCT

(10) International Publication Number
WO 03/095757 A1

(51) International Patent Classification⁷: **E04B 1/94**,
F16L 5/00, E04F 17/08

(21) International Application Number: PCT/SE03/00650

(22) International Filing Date: 23 April 2003 (23.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0201386-0 8 May 2002 (08.05.2002) SE

(71) Applicant (for all designated States except US): **ROX-TEC INTERNATIONAL AB** [SE/SE]; Box: 540, S-371 23 Karlskrona (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KREUTZ, Tomas** [SE/SE]; Ringövägen 89, S-371 60 Lyckeby (SE).

(74) Agent: **STRÖM & GULLIKSSON IPC AB**; P.O. Box: 4188, S-203 13 Malmö (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FIRE BARRIER FOR OPRNINGS IN WALLS OR THE LIKE, COMPRISING MULTIPLE FRAMES FOR CABLE ENTRIES.

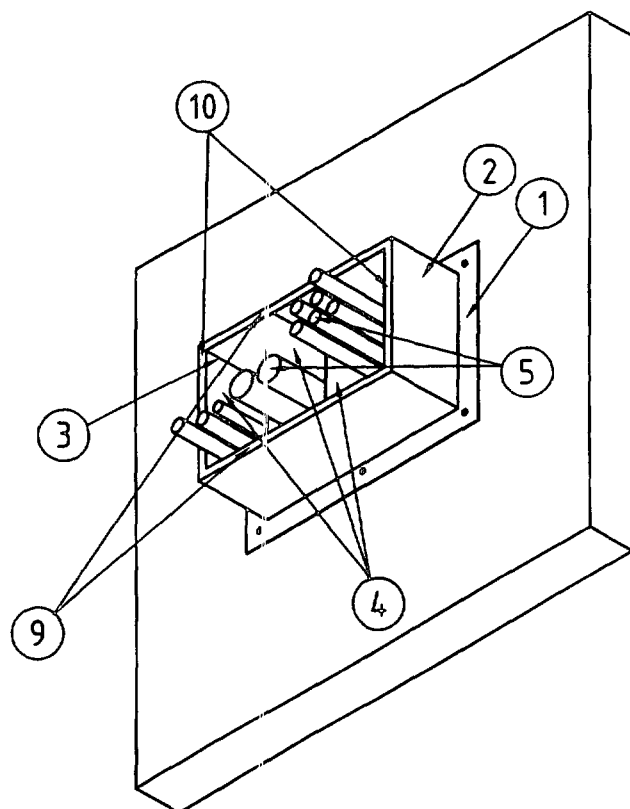

(57) Abstract: The present invention concerns a fire protection means for a frame for cable entries (7), pipe penetrations etc. The frame comprises an outer frame (1) to be mounted in a wall (8) or the like. Furthermore, the frame has one or more inner frames, having one or more cable entries (7) or the like. An extension (2) is arranged in connection with the frame on at least one side of the wall (8). Said extension (2) is furnished with the fire protection means.



WO 03/095757 A1