



(51) International Patent Classification:

H01R 27/00 (2006.01) *H01R 13/66* (2006.01)
H01R 29/00 (2006.01) *H02J 13/00* (2006.01)

(21) International Application Number:

PCT/US2012/063928

(22) International Filing Date:

7 November 2012 (07.11.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/556,792 7 November 2011 (07.11.2011) US
61/565,463 30 November 2011 (30.11.2011) US
13/607,550 7 September 2012 (07.09.2012) US

(71) Applicant: **APPLE INC.** [US/US]; 1 Infinite Loop, MS 169-3IPL, Cupertino, California 95014 (US).

(72) Inventors: **TERLIZZI, Jeffrey J.**; 1 Infinite Loop, MS 81-2PT, Cupertino, California 95014 (US). **MULLINS, Scott**; 1 Infinite Loop, MS 35-2MP, Cupertino, California

95014 (US). **KOSUT, Alexei**; 1 Infinite Loop, MS 35-2COS, Cupertino, California 95014 (US). **MINOO, Jahan**; 1 Infinite Loop, MS 81-2PT, Cupertino, California 95014 (US).

(74) Agents: **BASARKAR, Girish M.** et al.; Kilpatrick Townsend & Stockton LLP, Two Embarcadero Road, Eighth Floor, San Francisco, California 94111 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: TECHNIQUES FOR CONFIGURING CONTACTS OF A CONNECTOR

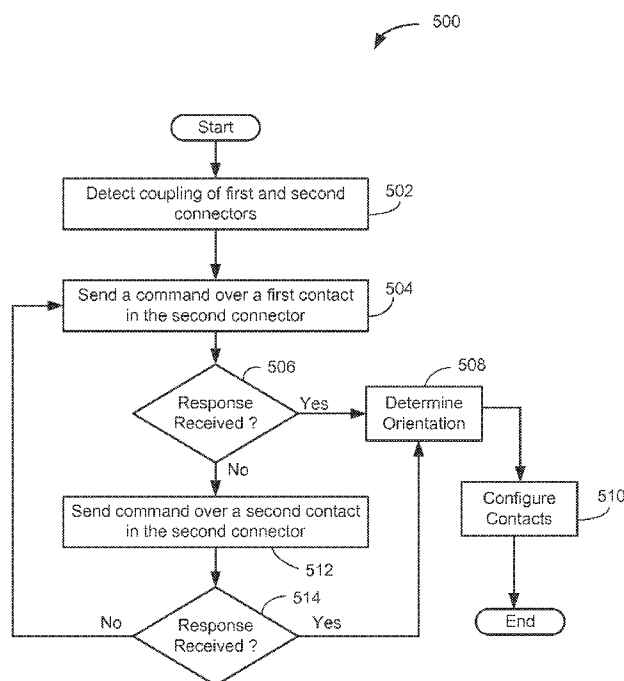


Fig. 5

(57) Abstract: Systems and methods for configuring contacts of a first connector includes detecting mating of a second connector with the first connector and in response to the detection, sending a command over one of the contacts and waiting for a response to the command. If a valid response to the command is received, the system determines the orientation of the second connector. The response also includes configuration information for contacts in the second connector. The system then configures some of the other contacts of the first connector based on the determined orientation and configuration information of the contacts of the second connector.



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*