

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
27 December 2002 (27.12.2002)

PCT

(10) International Publication Number
WO 02/102181 A1

- (51) International Patent Classification⁷: **A44B 19/16**, B65D 33/25
- (21) International Application Number: PCT/US01/19316
- (22) International Filing Date: 15 June 2001 (15.06.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant: **S. C. JOHNSON HOME STORAGE, INC.** [US/US]; 1525 Howe Street, Racine, WI 53403 (US).
- (72) Inventors: **TURVEY, Robert, R.**; 500 Peterson, Sanford, MI 58657 (US). **SOLLER, Douglas, A.**; 2729 Chapel Lane, Racine, WI 53406 (US). **CHRISTENSEN, Jeffrey, J.**; 4322 E. Studio Lane, Oak Creek, WI 53154 (US). **GUNDLACH, Douglas, P.**; 5119 Worsley Lane, Racine, WI 53402 (US).
- (74) Agents: **CHAPMAN, Kristin, L.** et al.; S. C. Johnson & Son, Inc., 1525 Howe Street, Racine, WI 53403 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: RECLOSABLE FASTENER ASSEMBLY WITH SLIDER CLOSED POSITION INDICATOR

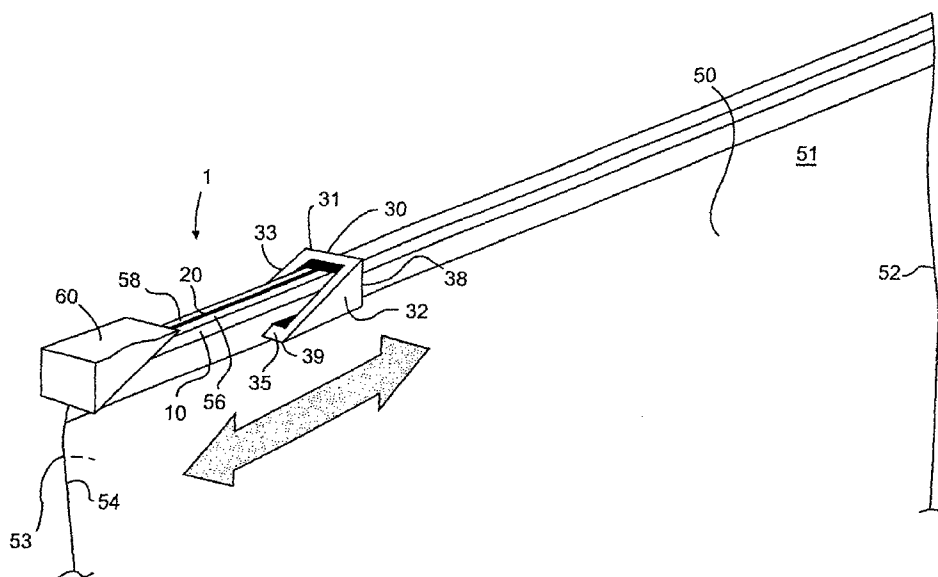

(57) Abstract: A reclosable fastener assembly includes first and second elongated closure elements that are engageable to form a seal. A slider is slidable relative to the closure elements between an open position and a closed position and is adapted (i) to engage the closure elements to one another when moved across the closure elements toward the closed position and (ii) to disengage the closure elements from one another when moved across the closure elements toward the open position. The slider carries a first partial indicator. A second partial indicator is located relative to the closure elements to as to complement the first partial indicator to form a visual indicator when the slider is in the closed position.



WO 02/102181 A1