

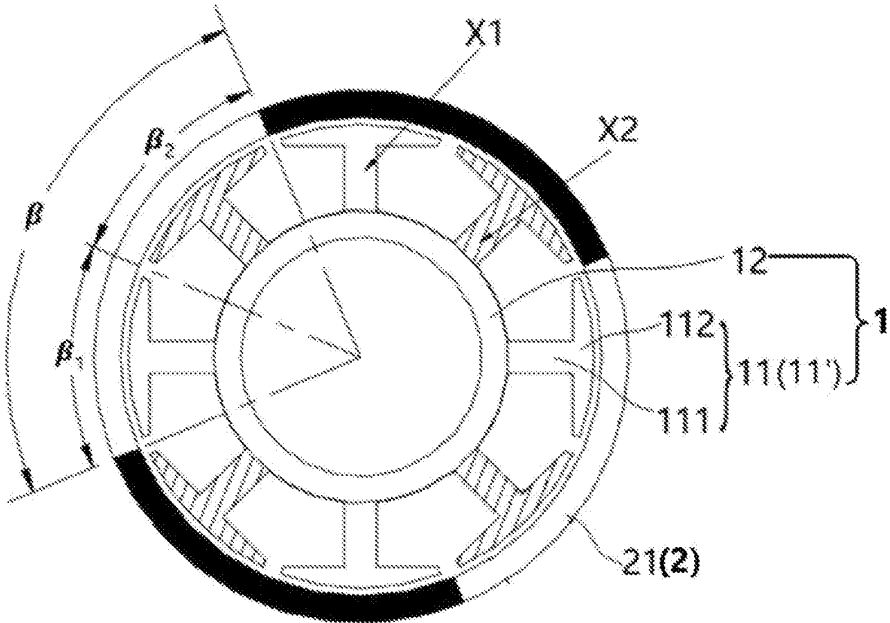


图 1A

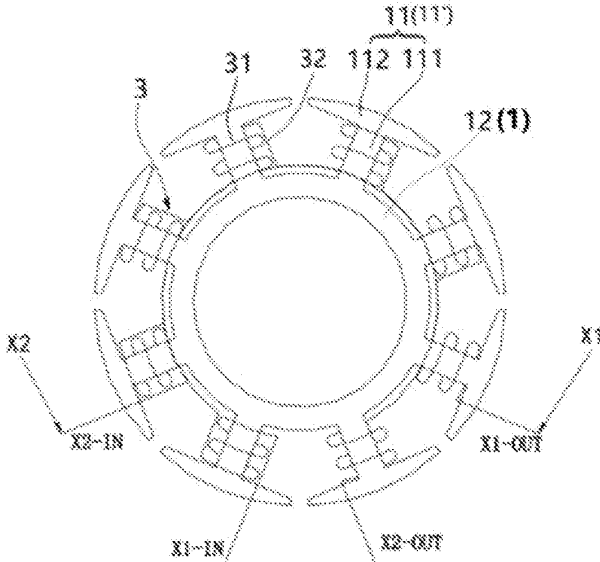


图 1B

210

通过N相导线各自独立的第一端和第二端，
向N相导线提供周期变化的N个驱动信号

图 2

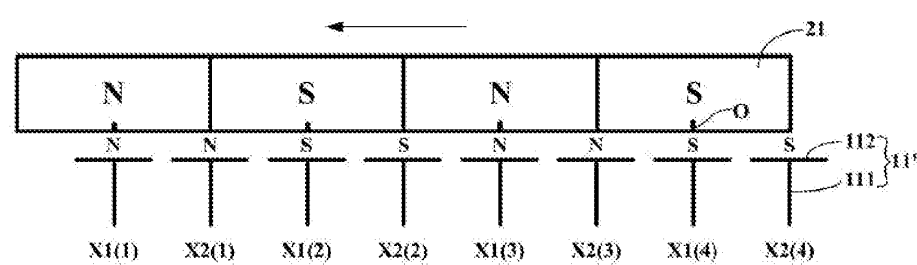


图 3A

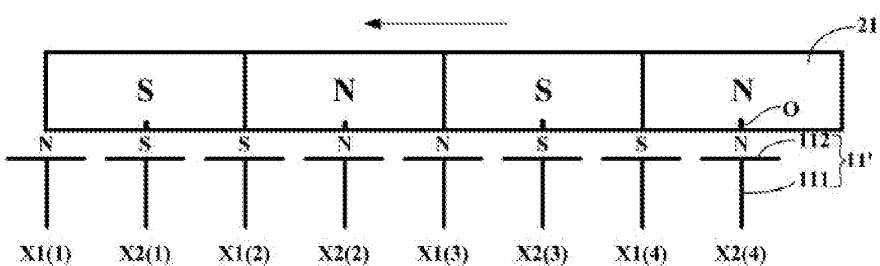


图 3B

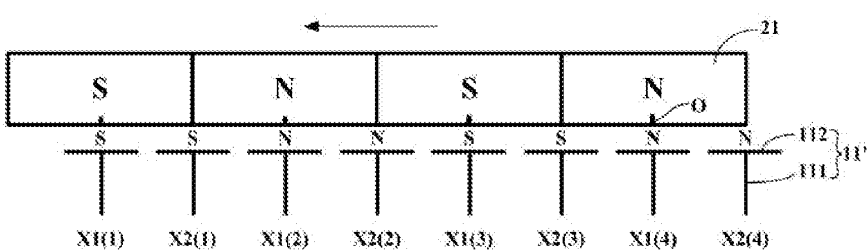


图 3C

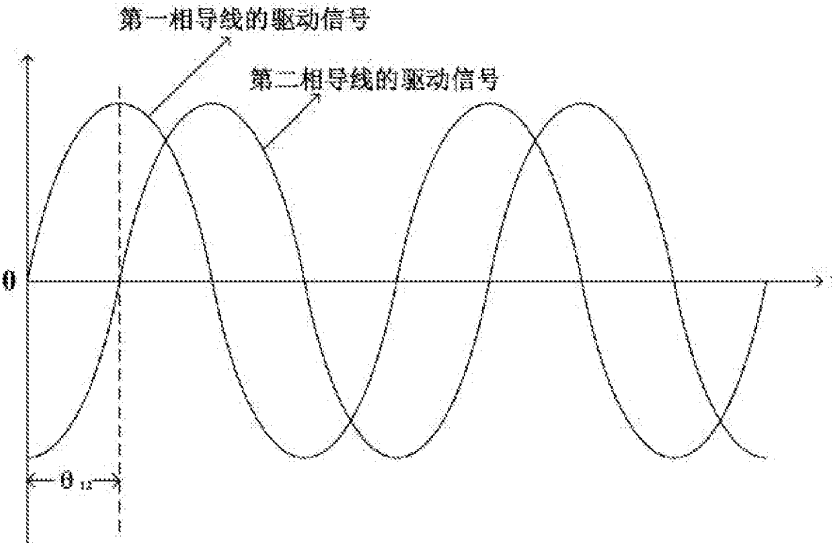


图 4A

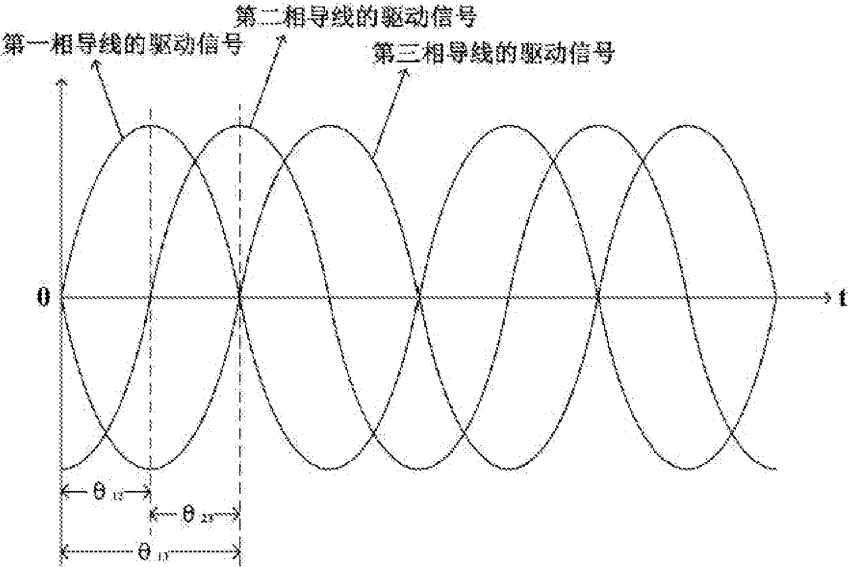


图 4B

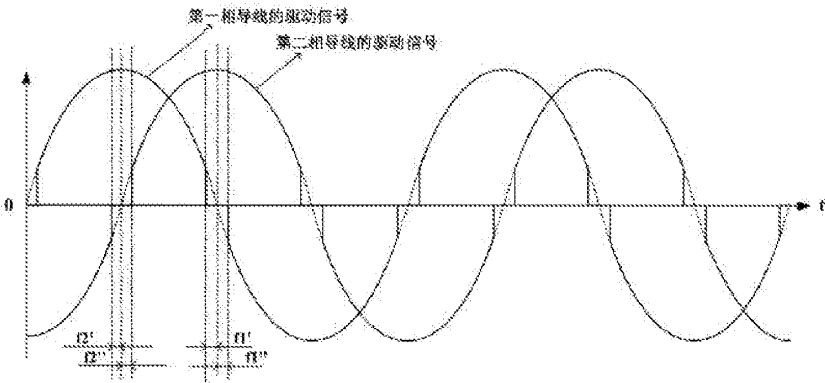


图 5

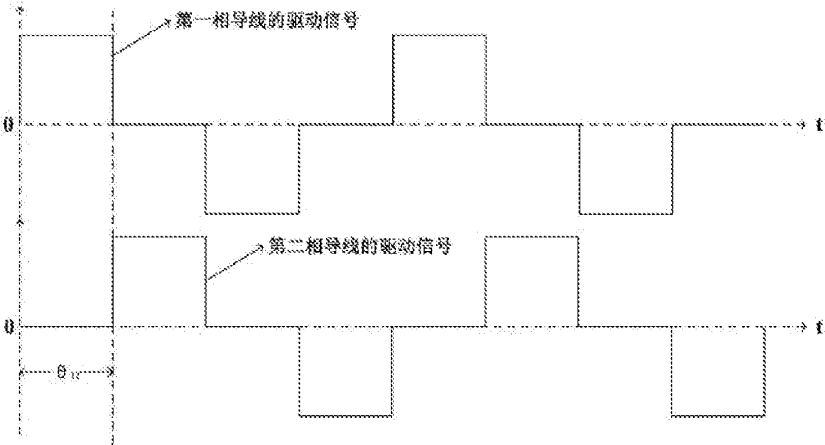


图 6A

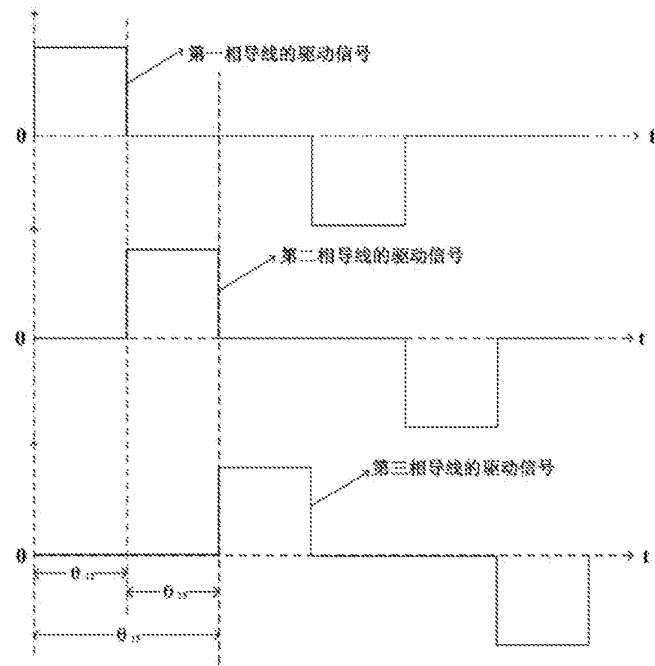


图 6B

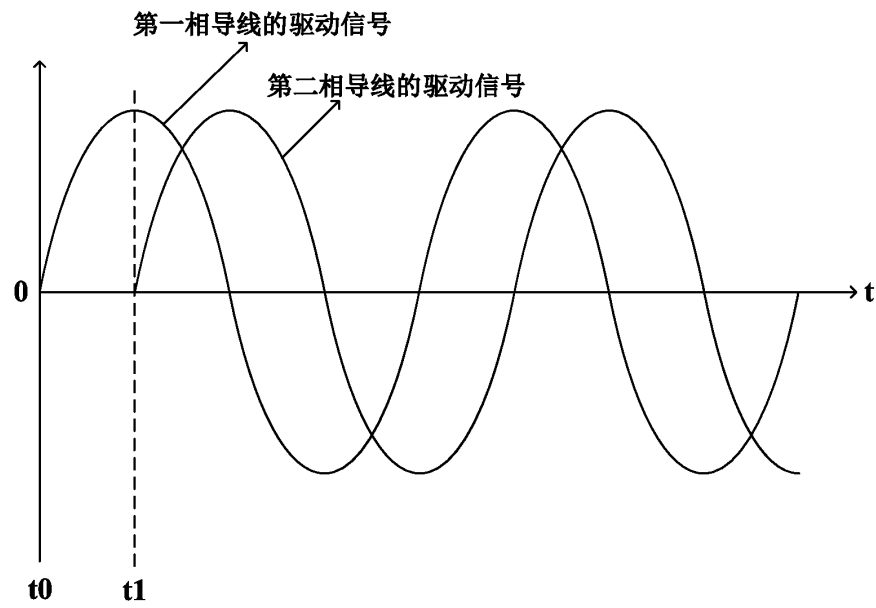


图 6C

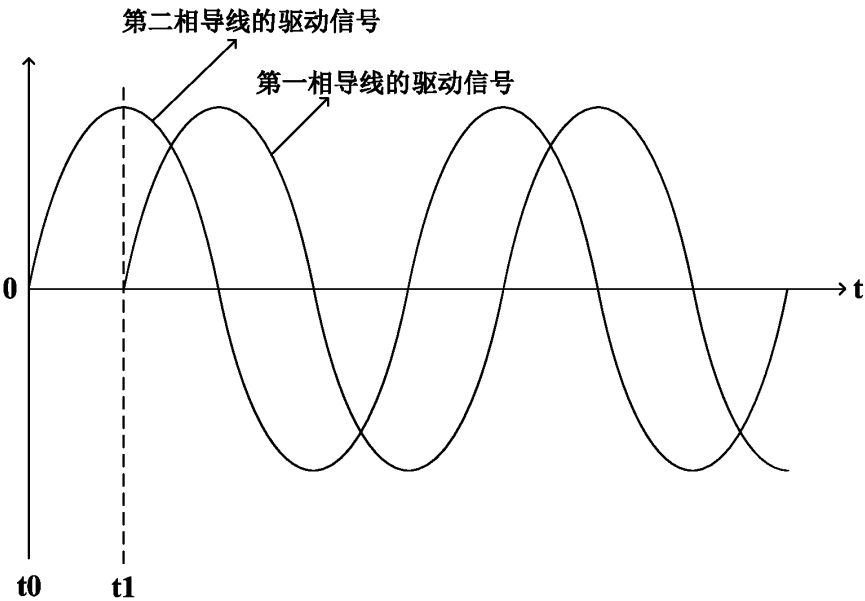


图 6D

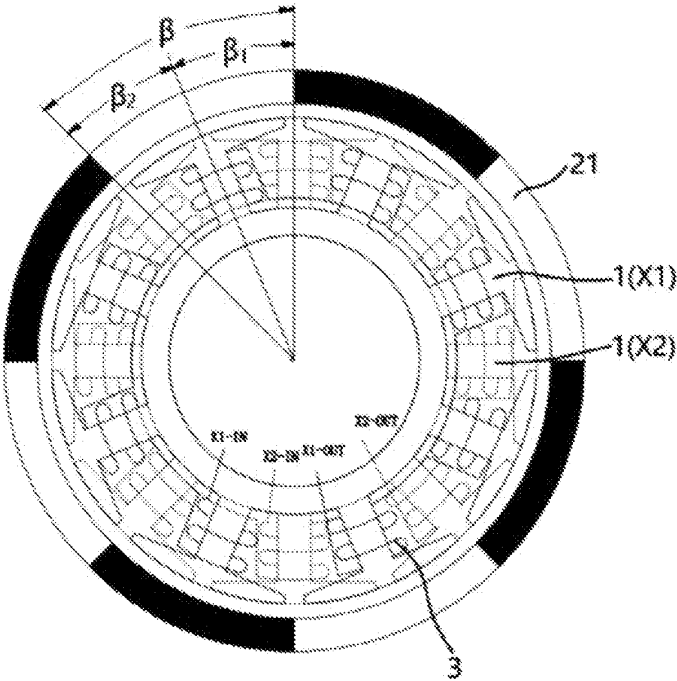


图 6E

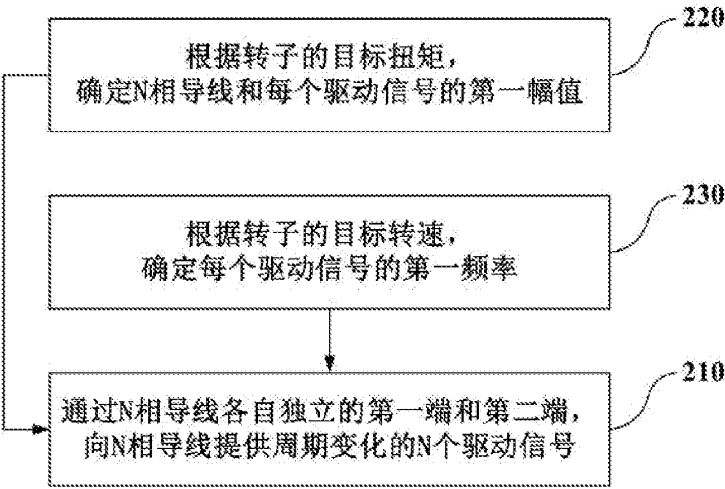


图 7




图 8

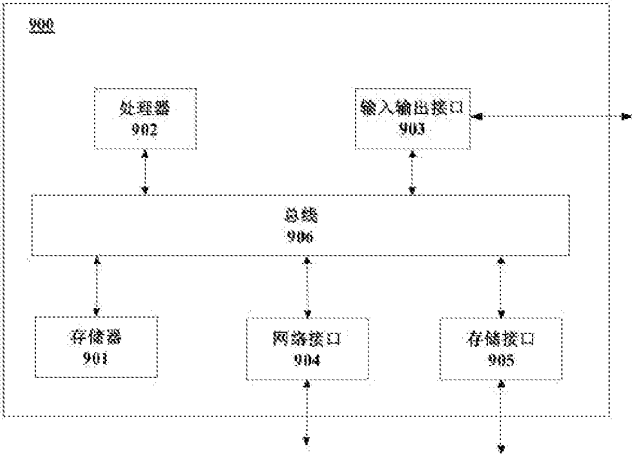


图 9

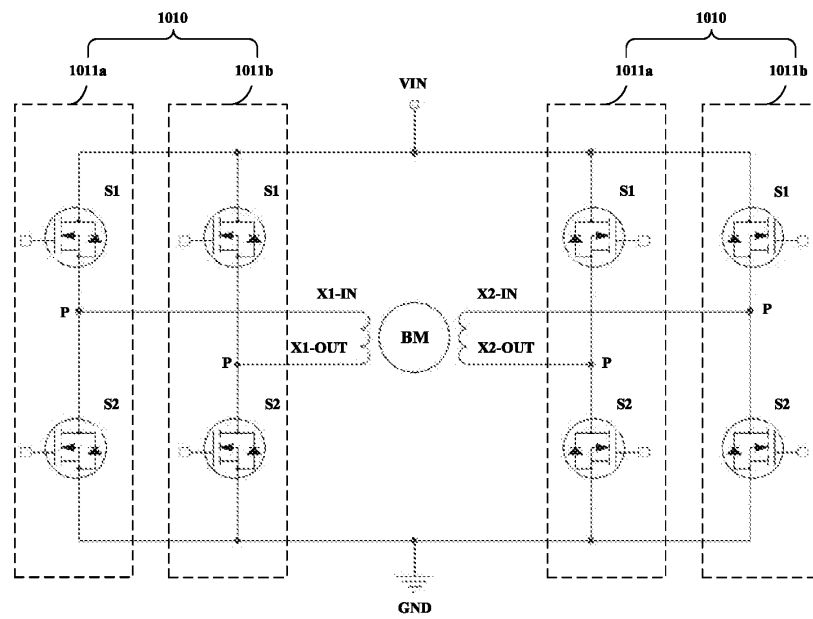


图 10A

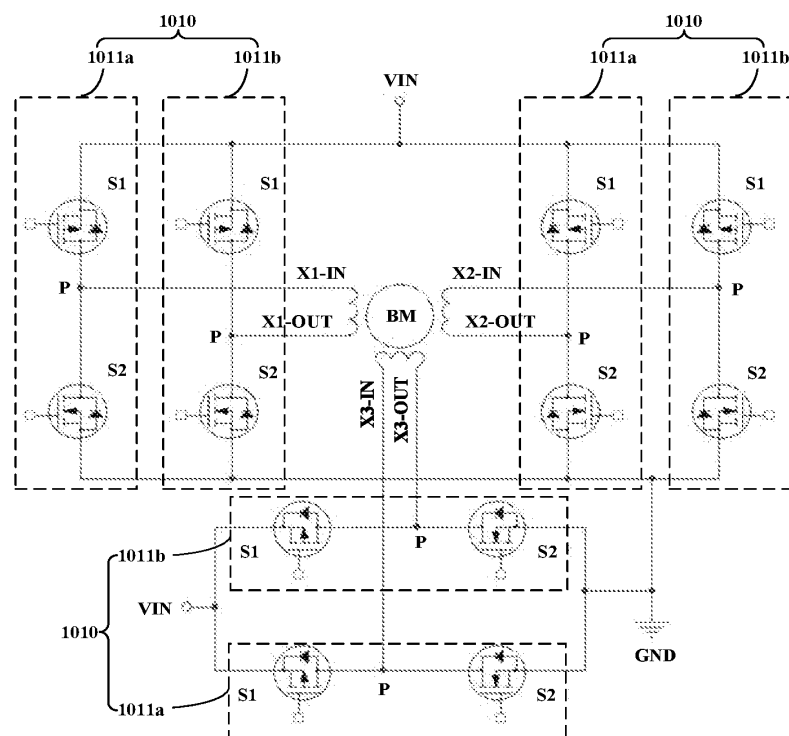


图 10B

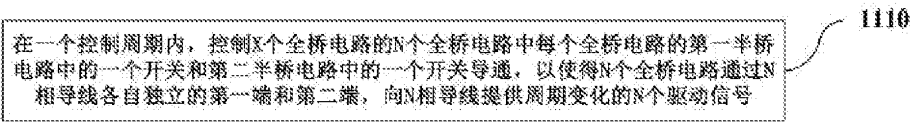


图 11

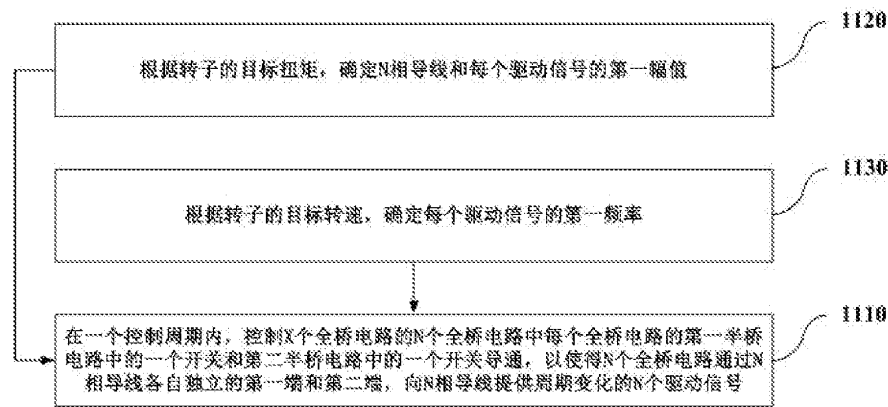


图 12

1300



图 13

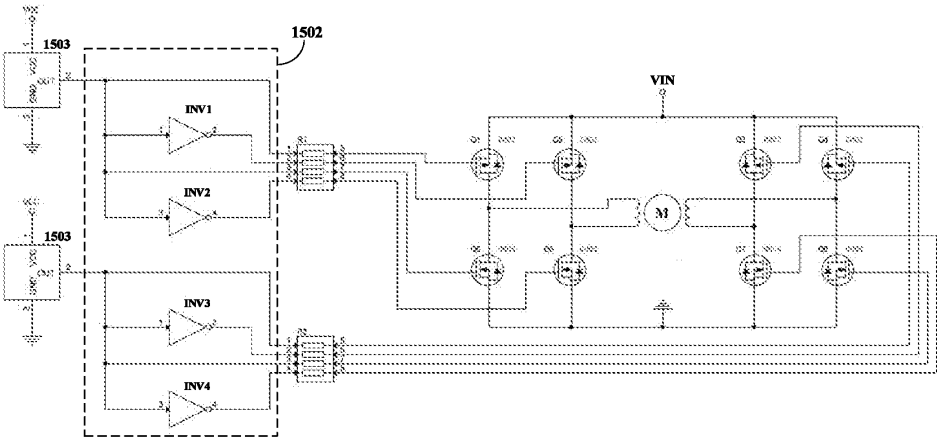


图 15B

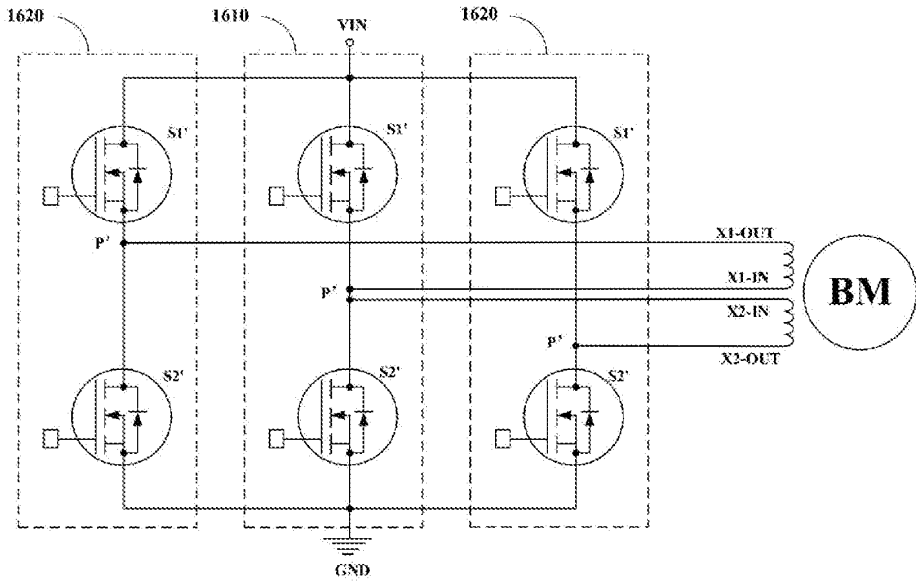


图 16