



(51) International Patent Classification:

F16K 15/03 (2006.01) *F16K 1/42* (2006.01)
F16K 1/18 (2006.01)

(21) International Application Number:

PCT/US2010/031738

(22) International Filing Date:

20 April 2010 (20.04.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/170,917 20 April 2009 (20.04.2009) US

(71) Applicant (for all designated States except US): **WEIR SPM, INC.** [US/US]; 7601 Wyatt Drive, Fort Worth, TX 76108 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WITKOWSKI, Brian, C.** [US/US]; 101 Stonebridge Lane, Weatherford, TX 76105 (US). **SAID, Nuder, M.** [ET/US]; 1600 Jones Drive, Apt. 125, Arlington, TX 76013 (US).

(74) Agent: **DERRINGTON, Keith, R.**; Bracewell & Giuliani LLP, P.O. Box 61389, Houston, TX 77008-1389 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:

17 February 2011

(54) Title: FLOWLINE FLAPPER VALVE

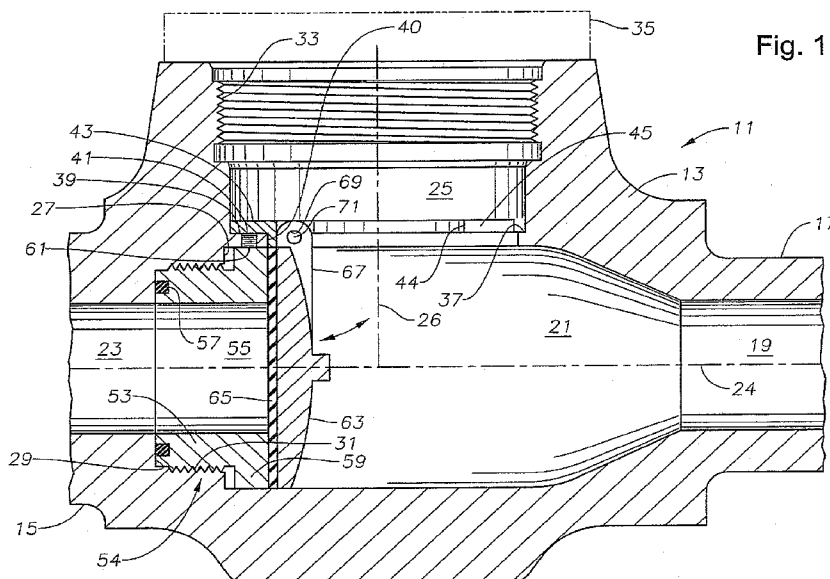

(57) Abstract: A check valve assembly has a body having a central cavity intersected by upstream and downstream flow passages. A seat is secured by a threaded engagement in the upstream flow passage. An access bore intersects the cavity and has a support shoulder formed in it. A holder is supported on the support shoulder. A flapper is pivotally secured to the holder and located in the cavity for movement between an open position and a closed position blocking flow through the seat. A straight edge portion in the access bore engages a straight edge portion of the holder to prevent rotation of the holder. A fastener extends through a hole in the support shoulder into engagement with the seat to prevent rotation of the seat.