

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

E04F 21/20

A1

(11) International Publication Number:

WO 97/07303

(43) International Publication Date:

27 February 1997 (27.02.97)

(21) International Application Number: PCT/GB96/01969

(22) International Filing Date: 13 August 1996 (13.08.96)

(30) Priority Data:


9516682.3	15 August 1995 (15.08.95)	GB
9521650.3	23 October 1995 (23.10.95)	GB
9521824.4	25 October 1995 (25.10.95)	GB
9525851.3	18 December 1995 (18.12.95)	GB
9600208.4	5 January 1996 (05.01.96)	GB
9603376.4	14 March 1996 (14.03.96)	GB
9607224.4	4 April 1996 (04.04.96)	GB

(71)(72) Applicant and Inventor: POLLITT, Clifford, Bruce
[GB/GB]; Cuerdon Cottage, Cuerdon Drive, Thelwall,
Warrington WA4 3JU (GB).(74) Agent: BERRY, Neil; 207 Moss Lane, Bramhall, Stockport,
Cheshire SK7 1BA (GB).(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY,
CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU,
IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV,
MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU,
SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ,
VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT,
LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI,
CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

*With international search report.**Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.*

(54) Title: IMPROVEMENTS IN OR RELATING TO TILES AND FLOOR SURFACES

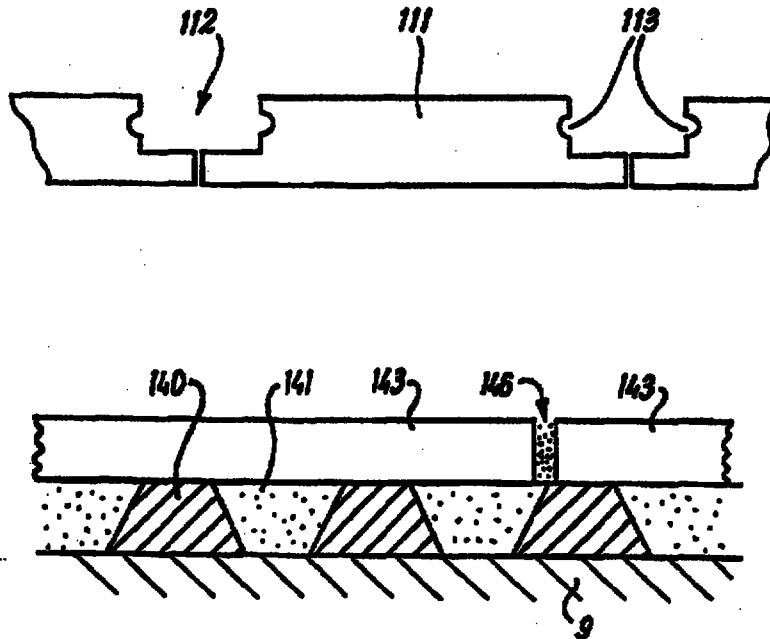

(57) Abstract

A method of forming a tiled floor without adhesive beneath the tiles comprises laying the tiles, applying filler between adjacent tiles after laying, and holding the tiles in relative position. A flexible sheet (140) with apertures (141) can be laid on a substrate (9) and the apertures filled with grouting material and the tiles (143) laid on the sheet (140), the spaces (146) between the tiles receiving filler material. The tiles (111) may have a groove (113) in peripheral sides to provide a keying effect for the filler material. The filler material may be settable after application and hold the tiles in position.