

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 January 2005 (27.01.2005)

PCT

(10) International Publication Number
WO 2005/008105 A1

(51) International Patent Classification⁷: **F16J 15/08**,
F16L 27/04, 37/28, F16K 1/32, 1/46

(NO). SVINDLAND, Staale [NO/NO]; P.A.Munchsvei
14, N-0870 Oslo (NO).

(21) International Application Number:
PCT/IB2004/002334

(74) Common Representative: **ABB OFFSHORE SYS-
TEMS AS**; c/o ABB AB, Legal Affairs & Compliance/In-
tellectual Property, Forskargränd 8, S-721 78 Västerås
(SE).

(22) International Filing Date: 20 July 2004 (20.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20033278 21 July 2003 (21.07.2003) NO

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(71) Applicant (*for all designated States except US*): **ABB
OFFSHORE SYSTEMS AS** [NO/NO]; P.O. Box 81,
N-1375 Billingstad (NO).


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **OESTERGAARD,
Inge** [NO/NO]; Oestliveien 32, N-1389 Heggedal (NO).
RAAD, Erik [NO/NO]; Nilserudkleiva 4, N-0874 Oslo

[Continued on next page]

(54) Title: A SEALING ELEMENT AND A COUPLING DEVICE AND A VALVE DEVICE PROVIDED WITH SUCH A SEAL-
ING ELEMENT

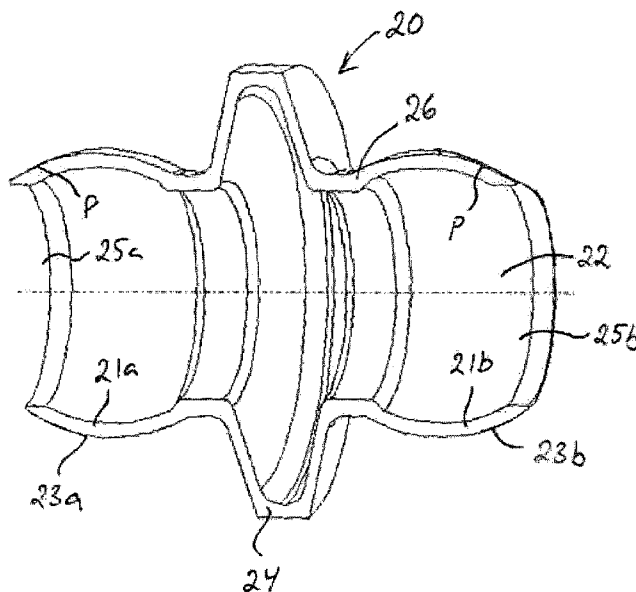

(57) Abstract: The invention relates to a sealing element (20) comprising a hollow body (26) of metallic material and first and second male sealing members (21a, 21b) formed at a respective end of the body (26). The respective male sealing member (21a, 21b) has an external spherical contact surface (23a, 23b) designed for mating with a corresponding internal conical contact surface of a female sealing member so as to form a fluid-tight seal between the male sealing member and the female sealing member when their contact surfaces are pressed against each other. The invention also relates to a coupling device and a valve device provided with such a sealing element.

WO 2005/008105 A1



FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.