

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 December 2003 (18.12.2003)

PCT

(10) International Publication Number
WO 03/103402 A1

(51) International Patent Classification⁷: **A21C 9/06**

Hiroyuki; c/o Rheon Automatic Machinery Co., Ltd., 2-3, Nozawa-machi, Utsunomiya-shi, Tochigi 320-0071 (JP).

(21) International Application Number: PCT/JP03/02153

(22) International Filing Date: 26 February 2003 (26.02.2003)

(74) Agents: **YAMASAKI, Yukuzo** et al.; Yamasaki Law and Patent Office, Sogo Nagatacho Bldg. 8F, 11-28, Nagatacho 1-chome, Chiyoda-ku, Tokyo 100-0014 (JP).

(25) Filing Language: English

(81) Designated States (*national*): AT, AU, CA, CH, CN, DE, ES, GB, KR, NZ, PH, RU, SE, SG.

(26) Publication Language: English

(30) Priority Data:
2002-167647 7 June 2002 (07.06.2002) JP

(84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR).


(71) Applicant: **RHEON AUTOMATIC MACHINERY CO., LTD.** [JP/JP]; 2-3, Nozawa-machi, Utsunomiya-shi, Tochigi 320-0071 (JP).

Published:
— with international search report

(72) Inventors: **OKAIZUMI, Hiroyuki**; c/o Rheon Automatic Machinery Co., Ltd., 2-3, Nozawa-machi, Utsunomiya-shi, Tochigi 320-0071 (JP). **YAMANAKA,**

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR PRODUCING A CONTINUOUS FOOD SHAPED AS A BAR AND A BELT CONVEYOR USED FOR ITS PRODUCTION

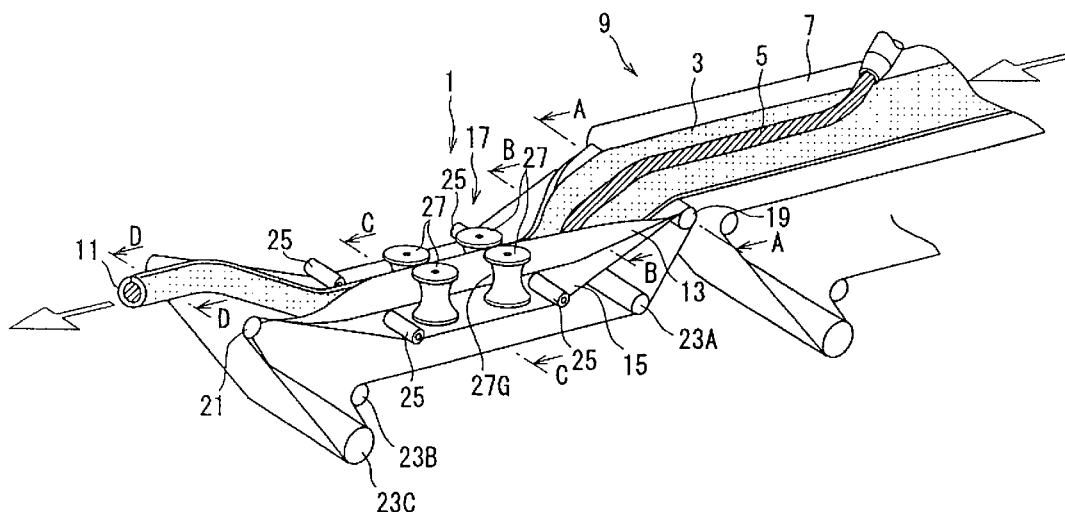

(57) Abstract: A method for producing a food shaped as a continuous bar by placing a continuous inner material (5) on a continuous strip of an outer layer material (3) that is transferred on a former belt (17), comprising the steps of placing food material that includes the inner material (5) placed on the strip of the outer layer material (3) in a channel space defined by the former belt (17) while it is running; and shaping part (13) of the former belt (17) that is located at the channel space as a sleeve by pushing and joining edges of the former belt (17) by a pushing device (27,35) to allow edges (3A) of the outer layer material (3) to be joined.



WO 03/103402 A1