

(51) International Patent Classification:
H04W 72/04 (2009.01) *H04W 74/08* (2009.01)(21) International Application Number:
PCT/US2010/026600(22) International Filing Date:
9 March 2010 (09.03.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/418,630 6 April 2009 (06.04.2009) US(71) Applicant (for all designated States except US): **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, MS: RNB-4-150, Santa Clara, California 95052 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CORDEIRO, Carlos** [BR/US]; 15168 NW Twinflower Dr, Portland, Oregon 97229 (US). **TRAININ, Solomon B.** [IL/IL]; Mtm Pob 1659, 31015 Haifa (IL).(74) Agents: **POLLACK, Caleb** et al.; Pearl Cohen Zedek Latzer, 1500 Broadway, 12th Floor, New York, New York 10036 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(88) Date of publication of the international search report:
13 January 2011

(54) Title: METHOD AND APPARATUS FOR DYNAMIC BANDWIDTH MANAGEMENT

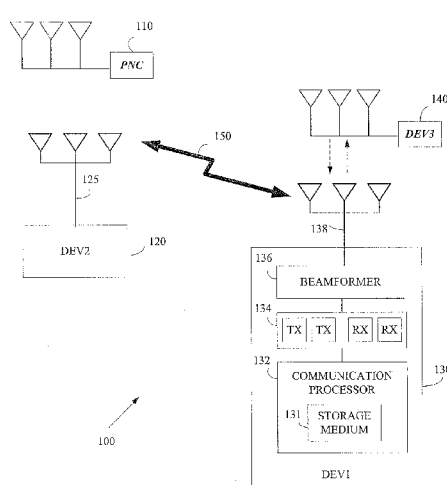


FIG. 1

(57) Abstract: A wireless communication device, a wireless communication system and a method of allocating a time slot during peer to peer communication over a millimeter wave wireless channel. The allocation of the time slot is done by truncating a channel time allocated time slot and releasing a truncated channel time allocation time slot for communication without a piconet network controller intervention and dynamically allocating a contention access period utilizing the released channel time of the allocated time.