(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国 际 局

(43) 国际公布日
2025 年 10 月 30 日 (30.10.2025)

WIPO | PCT

(10) 国际公布号
WO 2025/222390 A1

(51) 国际专利分类号:
H04N 23/63 (2023.01)

(21) 国际申请号: PCT/CN2024/089421

(22) 国际申请日: 2024 年 4 月 23 日 (23.04.2024)

(25) 申请语言: 中文

(26) 公布语言: 中文

(71) 申请人: 北京字跳网络技术有限公司 **(BEIJING ZITIAO NETWORK TECHNOLOGY CO., LTD.)** [CN/CN]; 中国北京市海淀区紫金数码园4号楼2层0207 100190 (CN)。

(72) 发明人:余维伟**(YU, Weiwei)**; 中国北京市朝阳区七圣中街12号院融中心B1小邮局 100028 (CN)。张欣羽**(ZHANG, Xinyu)**; 中国北京市朝阳区七圣中街12号院融中心B1小邮局 100028 (CN)。


(74) 代理人:北京世辉律师事务所**(SHIHUI PARTNERS)**; 中国北京市朝阳区建国门外大街2号北京银泰中心C座42层 100022 (CN)。

(81) 指定国(除另有指明，要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。

(84) 指定国(除另有指明，要求每一种可提供的地区保护): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE,

(54) **Title:** IMAGE CAPTURING METHOD AND APPARATUS, DEVICE, AND STORAGE MEDIUM

(54) 发明名称: 图像拍摄方法、装置、设备和存储介质

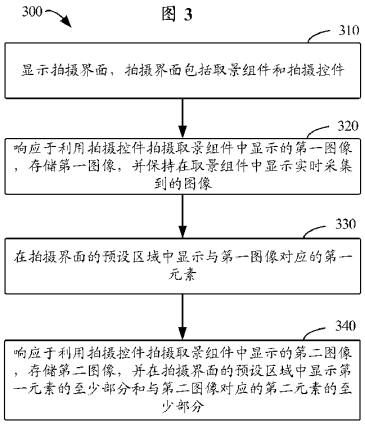

310 Display a photographing interface, wherein the photographing interface comprises a view-finding assembly and a photographing control

320 In response to using the photographing control to capture a first image displayed in the view-finding assembly, store the first image, and keep displaying in the view-finding assembly the image acquired in real time

330 Display in a preset area of the photographing interface a first element corresponding to the first image

340 In response to using the photographing control to capture a second image displayed in the view-finding assembly, store the second image, and display in the preset area of the photographing interface at least part of the first element and at least part of a second element corresponding to the second image

(57) **Abstract:** Embodiments of the present disclosure provide an image capturing method and apparatus, a device, and a storage medium. The method comprises: displaying a photographing interface, wherein the photographing interface comprises a view-finding assembly and a photographing control; in response to using the photographing control to capture a first image displayed in the view-finding assembly, storing the first image, and keeping displaying in the view-finding assembly the image acquired in real time; displaying in a preset area of the photographing interface a first element corresponding to the first image; and in response to using the photographing control to capture a second image displayed in the view-finding assembly, storing the second image, and displaying in the preset area of the photographing interface at least part of the first element and at least part of a second element corresponding to the second image. In this way, the embodiments of the present application can improve the image capturing efficiency.

WO 2025/222390 A1

[见续页]

BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布:
— 包括国际检索报告(条约第21条(3))。

(57) 摘要: 根据本公开的实施例，提供了图像拍摄的方法、装置、设备和存储介质。该方法包括：显示拍摄界面，拍摄界面包括取景组件和拍摄控件；响应于利用拍摄控件拍摄取景组件中显示的第一图像，存储第一图像，并保持在取景组件中显示实时采集到的图像；在拍摄界面的预设区域中显示与第一图像对应的第一元素；响应于利用拍摄控件拍摄取景组件中显示的第二图像，存储第二图像，并在拍摄界面的预设区域中显示第一元素的至少部分和与第二图像对应的第二元素的至少部分。由此，本公开的实施例可以提高图像拍摄的效率。