



- (51) International Patent Classification:
E21B 10/44 (2006.01) *E21B 10/42* (2006.01)
- (21) International Application Number:
PCT/US2013/041363
- (22) International Filing Date:
16 May 2013 (16.05.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/530,942 22 June 2012 (22.06.2012) US
- (71) Applicant: **BAKER HUGHES INCORPORATED**
[US/US]; P.O. Box 4740, Houston, Texas 77210-4740 (US).
- (72) Inventor: **STOWE, Calvin, J., II**; 4327 Verone, Bellaire, Texas 77401 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,

KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: CUTTING ELEMENT, TOOL AND METHOD OF CUTTING WITHIN A BOREHOLE

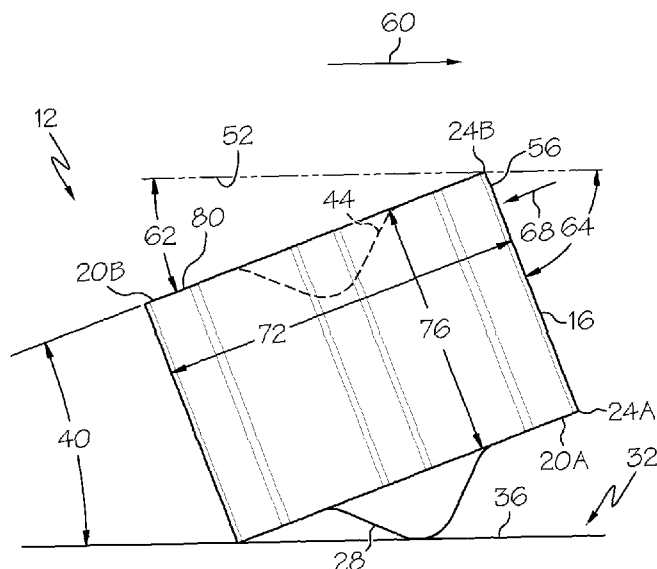


FIG. 1

(57) Abstract: A cutting element includes a body having two planes, each of the two planes defining a plurality of edges, and a support extending from a first of the two planes. The support and the body are configured such that when at least one of the plurality of edges and the support are in contact with the planar surface, edges of the plurality of edges on a second of the two planes form cutting edges and the second of the two planes forms an acute angle with the planar surface. The second of the two planes of the cutting element has a recess formed therein sized and positioned to be receptive to a support of a second cutting element similar to the cutting element when the first of the two planes of the second cutting element is butted against the second of the two planes of the cutting element.