



- (51) **International Patent Classification:**
H02G 3/04 (2006.01) *H02G 5/00* (2006.01)
- (21) **International Application Number:**
PCT/IT2012/000120
- (22) **International Filing Date:**
24 April 2012 (24.04.2012)
- (25) **Filing Language:** Italian
- (26) **Publication Language:** English
- (71) **Applicant** (for all designated States except US): **IAM S.R.L.** [IT/IT]; Via Ambaraga, 40, I-25133 Brescia (IT).
- (72) **Inventor; and**
- (75) **Inventor/Applicant** (for US only): **REGOSA Mattia** [IT/IT]; Via Ambaraga, 40, I-1-25133 Brescia (IT).
- (74) **Agents:** **SANGIACOMO Ines** et al.; c/o **BIESSE S.R.L.**, Via Corfu 71, I-25124 BRESCIA (IT).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,


CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** ADAPTABLE PREFABRICATED LAMINATED BUSBARSYSTEM AND A METHOD FOR A ADAPTING THE LENGTH OF SAID BUSBARSYSTEM

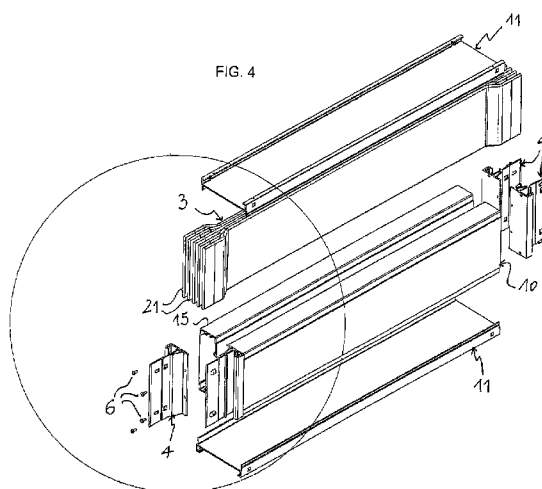

(57) **Abstract:** A conductive element (1) is described for forming busways, comprising a casing (2) formed by at least one profiled member, a plurality of conductor rails (3) accommodated in the casing (2) and having splayed terminals (21) protruding from opposite ends of the casing (2) and at least one grounding member (4), and further comprising at least one first connection (5) extending along the whole length of the casing (2), and fastening means cooperating with the at least one first connection (5) for removably coupling the grounding member (4) to an end of the casing (2).

