



(43) International Publication Date
20 March 2014 (20.03.2014)

(51) International Patent Classification:
H01L 31/052 (2014.01)

(21) International Application Number:
PCT/CZ2012/000105

(22) International Filing Date:
22 October 2012 (22.10.2012)

(25) Filing Language: Czech

(26) Publication Language: English

(30) Priority Data:
PV 2012-636 14 September 2012 (14.09.2012) CZ

(71) Applicant: VYSOKÉ UČENÍ TECHNICKÉ V BRNĚ
[CZ/CZ]; Antonínská 548/1, CZ-60190 Brno (CZ).

(72) Inventor: FIALA, Pavel; Hlaváčova 55, CZ-61400 Brno (CZ).

(74) Agent: KENDEREŠKI, Dušan; Lidická 51, CZ-60200 Brno (CZ).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:
26 June 2014

(54) Title: A SOLAR ELEMENT COMPRISING RESONATOR FOR APPLICATION IN ENERGETICS

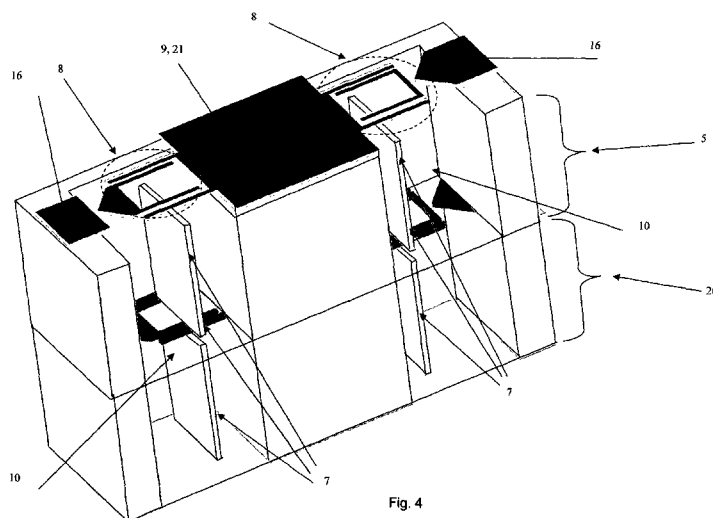


Fig. 4

(57) Abstract: A solar element including a basic resonator arranged on a dielectric structure that is constituted by an area (5) with minimum electromagnetic damping, whose upper plane forms the plane of incidence (3). The area (5) with minimum electromagnetic damping is transparent in relation to the incident electromagnetic wave; the area is limited by the boundaries (6) of variations in material properties, and at least one 2D-3D resonator (4) is surrounded by the dielectric (10) and configured in the dielectric structure. The area (5) with minimum electromagnetic damping is coupled with at least one other area (20) exhibiting a different resonance frequency of the basic resonator, and the system is terminated either in the free space or by a solar element (system) intended to absorb the entire amount of the remaining energy provided by the incident electromagnetic wave.



WO 2014/040576 A3