



(51) International Patent Classification:
E01D 15/20 (2006.01)

(21) International Application Number:
PCT/NO2010/000270

(22) International Filing Date:
6 July 2010 (06.07.2010)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:
20092548 6 July 2009 (06.07.2009) NO

(71) Applicant (for all designated States except US): ARNE
OLAV ØSTERBØ [NO/NO]; N-5962 Bjordal (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): ASBJØRN, Nes [NO/
NO]; Brandøy, N-6878 Veitastrand (NO).

(74) Agent: ACAPO AS; Strandgt. 198, P.O. Box 1880,
N-5817 Bergen (NO).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: CONSTRUCTION OF A WALKWAY

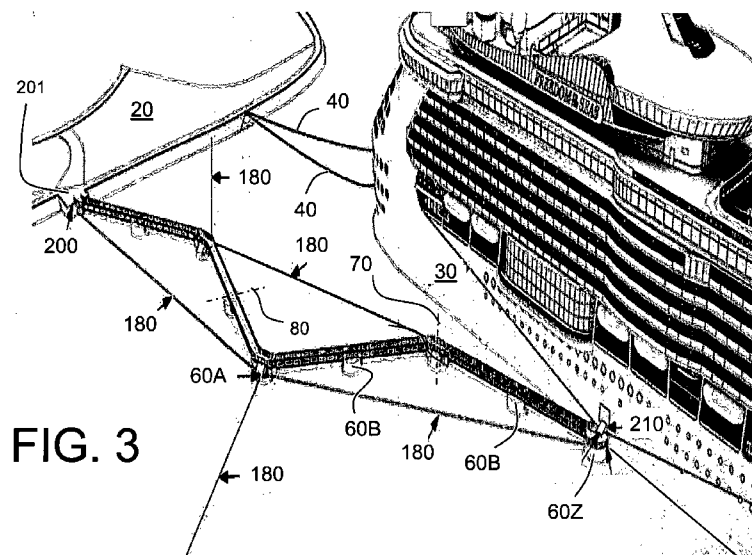

(57) Abstract: A flexible, floating walkway (10) is described to make it possible to securely transport people and/or goods between installations at sea, such as ships, and land (30,20). The walkway is characterised in that it comprises bridge elements (50) coupled in between floating elements (60A, 60B, 60C) fitted with horizontal and vertical segments, so that the floating elements can be pulled out during use to couple the installations (30,20) (20) and folded up when the walkway (10) is not in use. The bridge elements (50) are designed, together with the floating elements (60A, 60B) to be unfolded and folded up in a zigzag concertina type formation. The invention also relates to applications of the construction to combine with land areas separated by a strait or a river where there is, for example, heavy traffic.