



- (51) **International Patent Classification:**
H04W 36/00 (2009.01)
- (21) **International Application Number:**
PCT/CN2024/071456
- (22) **International Filing Date:**
09 January 2024 (09.01.2024)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** **LENOVO (BEIJING) LIMITED** [CN/CN]; 6 Shangdi West Road, Haidian District, Beijing 100085 (CN).
- (72) **Inventors:** **WU, Lianhai**; Lenovo Hq, No.10 Xibeiwang East Road, Haidian District, Beijing 100094 (CN). **DAI, Mingzeng**; Room 501, Building 13, No.58, Kangshan Road, Pudong New Area, Shanghai 201315 (CN). **ZHANG, Congchi**; Hunan Road No. 577, Building 19, Room 402, Pudong New Area, Shanghai 200120 (CN).
- (74) **Agent:** **LEE AND LI - LEAVEN IPR AGENCY LTD.**; Unit 2202, Tower A, Beijing Pudi Hotel, No. 7, Jian Guo Men South Avenue, Dongcheng District, Beijing 100005 (CN).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

- (54) **Title:** METHOD AND APPARATUS FOR L2 RESET INDICATION AND UE-MEASURED TA INDICATION IN LTM SCENARIO

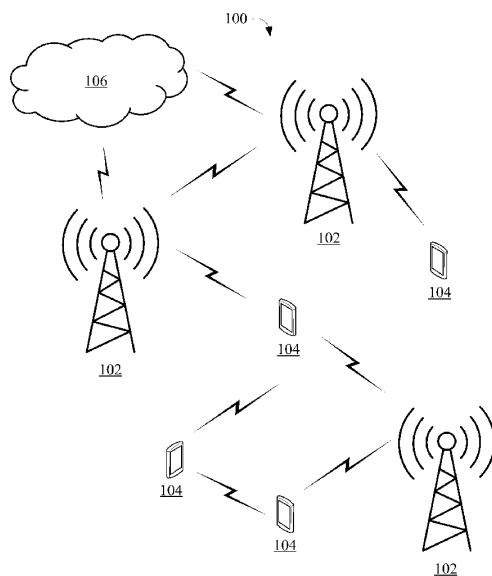


FIG. 1

- (57) **Abstract:** Embodiments of the present disclosure relate to a method and apparatus for an L2 reset indication and a UE-measured TA indication in an LTM scenario. According to some embodiments of the disclosure, a first BS may: transmit a request message to a second BS, wherein the request message includes an identity of a first candidate cell and requests an indication of whether UE-measured TA is able to be used or an indication of whether cell switch without L2 reset is performed when switching towards the first candidate cell from a second candidate cell; and receive, from the second BS, a response message in response to the request message.

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*
- *upon request of the applicant, before the expiration of the time limit referred to in Article 21(2)(a)*