

SPECIFICATION

AK-9701

TITLE OF THE INVENTION

SYNTHETIC RESIN HANDLE AND BOTTLE HAVING THE SAME

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

This invention relates to a synthetic resin handle for use with a synthetic resin bottle produced by stretch-blow molding and to a bottle having the handle which is attached to one surface of a thin side portion thereof.

10 2. Background Art

It is technically difficult to mold a handle integrally with a side portion of a synthetic resin bottle made from a thermoplastic resin such as polyethylene terephthalate, polypropylene or polycarbonate and formed by stretching and blowing a preform formed by injection molding in a blow mold to make thin the side portion thereof, unlike a thick resin bottle formed by blow molding. Therefore, a separately molded handle is attached to the side portion of the synthetic resin bottle, making use of insert molding or
15 employing an engagement means after the bottle is molded.
20

As the synthetic resin bottle having a handle attached thereto, there is known one in which a doveled projection is provided at a handle attachment position of a bottle main body, the handle main body is attached to the
25 bottle main body by fitting the attachment engagement



projection of the handle main body in an engagement recess portion at a base portion of the projection, and then the handle main body is fixed to the bottle main body using a lock fixing plate or lock fixing member.

5 The handle is attached to the bottle by the engagement between the doveled projection and the recess portion, making use of the deflection of a foot portion of the handle. Therefore, the doveled projection cannot be fitted into the engagement recess portion deeper than the
10 deflection of the foot portion and hence, the engagement is not satisfactory. Therefore, when a bottle having heavy contents is lifted up by holding the handle, the handle is often disconnected from the bottle because it cannot resist the weight of the bottle. When the deflection of the foot
15 portion is increased for the engagement, the foot portion is deflected by the weight of the bottle and the doveled projection is disengaged from the recess portion. Therefore, there is limitation to the deflection of the foot portion.

 Although the use of the above lock fixing plate or
20 the like is an extremely effective means in preventing the deflection of the foot portion, since the deflection of the foot portion is prevented by using the fixing plate or the like formed separately from the handle, molds for the handle and the fixing plate are required for the production of the
25 bottle and molding must be carried out twice, thereby

boosting production costs.

To attach the handle to the bottle, it is necessary to set the fixing plate aslant on the grip portions of upper and lower foot portions so that it does not interfere the
5 insertion of the foot portions. To prevent the fixing plate from falling off at the time of setting, a complex structure that both ends of the fixing plate are formed into engagement edges must be employed. Therefore, the production costs of the bottle is boosted as a container having the above
10 problems.

The present invention is made to solve the above problems when the handle is attached to a barrel side portion of a bottle main body by engagement. It is an object of the present invention to provide a synthetic resin handle which
15 can be firmly fitted in a recess in a side portion of a synthetic resin bottle by fixing simply and easily upper and lower contact plates without setting a fixing plate for contact plates which are formed from an upper end and a lower end of a grip portion and project toward the inner side of
20 the grip portion because the fixing plate is molded integrally with the grip portion, as well a bottle having the same.

SUMMARY OF THE INVENTION

25 According to a first aspect of the present

invention, there is provided a synthetic resin handle which comprises a grip portion which is longitudinally long enough to extend from an upper edge to a lower edge of a recess in a side portion of a bottle, an upper contact plate which
5 projects inward and obliquely downward from the bottom of a holding portion provided on an upper end of the grip portion and has an engagement piece projecting upward and facing the holding portion, and a lower contact plate which is formed from a lower end of the grip portion, bent inward and
10 obliquely upward and has an engagement piece projecting downward at its distal end, wherein a connection step portion is formed in an upper end portion of the lower contact plate and a fixing plate having such a length that its distal end reaches the inside of the connection step portion extends
15 obliquely toward the grip portion by bending its connection portion with the upper contact plate.

According to another aspect of the present invention, there is provided a bottle having the above synthetic resin handle which is fixed in a synthetic resin
20 bottle main body which is formed by stretch-blow molding and has a recess for attaching the handle on one surface of a thin side portion thereof and engagement recesses which are long horizontally and formed in upper and lower walls of the recess by integrating the upper and lower contact plates
25 through the engagement between the engagement pieces of the

upper and lower contact plates inserted into upper and lower surfaces of the recess in the side portion of the bottle and the engagement recesses in the upper and lower walls of the recess and the engagement between the fixing plate and the connection step portion in the top end portion of the lower contact plate.

As the starting material of the bottle main body may be used thermoplastic resins such as polyethylene terephthalate, polypropylene, polycarbonate, polyethylene, polyethylene naphthalate and the like, and as the starting material of the handle may be used thermoplastic resins having elasticity and toughness such as polypropylene, polyethylene, nylon and the like.

15 BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects as well as advantages of the present invention will become clear by the following description of a preferred embodiment of the present invention with reference to the accompanying drawings, wherein:

Fig. 1 is a side view of a synthetic resin handle according to an embodiment of the present invention;

Fig. 2 is a front view of the synthetic resin handle;

Fig. 3 is a longitudinal side view of key parts of

a bottle having the synthetic resin handle of the present invention; and

Fig. 4 is a longitudinal side view of key parts of a bottle showing the synthetic resin handle attached thereto.

5

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the figures, reference numeral 1 is a handle molded of polypropylene by injection molding and consisting of a rectangular grip portion 2 which is long longitudinally, 10 an upper contact plate 4 which projects inward from the bottom of a holding portion 3 provided on an upper end of the grip portion 2, and a lower contact plate 5 which projects from a lower end of the grip portion 2 and curves inward.

The grip portion 2 has a H-shaped cross section and 15 a web 2a at a central portion thereof and gently curves inward. The upper contact plate 4 and the lower contact plate 5 are formed integrally with the grip portion 2 in such a manner that the upper contact plate 4 is inclined downward and the lower contact plate 5 is inclined upward on the inner 20 side of the grip portion 2. The upper contact plate 4 and the lower contact plate 5 have the same width as the grip portion but their thicknesses are such that they produce a certain degree of deflection.

An engagement piece 6 is provided on the top 25 surface of the upper contact plate 4 and faces a holding

portion 3 in such a manner that it projects upward and an engagement piece 7 is provided on the under surface of a top end portion of the lower contact plate 5 in such a manner that it projects downward. An upper top end portion 8 of the engagement piece 5 is formed inward like a thick block and a connection step portion 10 to be engaged with the end of the fixing plate 9 and extending from the upper contact plate 4 is formed in the end of the top end portion 8 in a transverse direction.

10 The fixing plate 9 has a connection portion which greatly curves inward from the bottom of the engagement piece 6 of the contact plate 4, extends long and obliquely toward the grip portion to a length that its distal end reaches the inside of the connection step portion 10, and has the
15 function of returning to its original position against pressure force by flexibility produced by the curvature of its connection portion. The engagement pieces 6 and 7 are formed of projection pieces having an U-shaped plane cross section and an opening in an outward direction to prevent a
20 sink mark produced at the time of molding a thick portion. Reference numerals 11 and 12 are holes for preventing a sink mark in the holding portion 3 and the top end portion 8, respectively and can be used as a hole for inserting a jig for attaching the handle.

25 The handle 1 structured above is attached to a

synthetic resin bottle 20 having a thin barrel portion formed by stretch-blow molding by fitting it into a recess 21 for attaching the handle formed on one surface of a side portion of the bottle 20. An upper wall 22 of the recess 21 is
5 inclined downward and an lower wall 23 is inclined upward, and engagement recesses 24 and 25 which are long horizontally are formed in the surfaces of the respective walls.

The handle 1 can be attached to the recess 21 preliminarily as shown by chain lines in Fig. 4. That is,
10 the upper contact plate 4 is first inserted diagonally into the recess 21 in the side portion of the bottle with the grip portion 2 positioned upright, the top end portion 8 of the lower contact plate 5 is forcibly pressed into the recess 21 until it contacts a vertical wall 26 while the engagement
15 piece 6 is pressed into the engagement recess 24 in the upper wall 22, and then the engagement piece 7 is fitted into the engagement recess 25 in the lower wall 23.

Since the engagement pieces 6 and 7 are merely engaged with the engagement recesses 24 and 25 by reaction
20 force against deflection produced by forcibly pressing the upper and lower contact plates 4 and 5 at the time of insertion, respectively and not fixed firmly in this preliminary attachment, when outward tensile force is applied to the grip portion 2, the upper and lower contact plates 4
25 and 5 are bent, the engagement pieces 6 and 7 slip out of the

engagement recesses 24 and 25, respectively, and the handle 1 is disconnected.

To cope with this problem, when a lower portion of the fixing plate 9 is pressed toward the innermost part of the recess 21 in the side portion of the bottle after the preliminary attachment, the fixing plate 9 bends slightly while it slides over the top surface of the top end portion 8 of the upper contact plate 5 whose distal end faces slightly upward, curves from the connection portion with the upper contact plate 4, and moves until it contacts the vertical wall 26. Since the engagement step portion 10 is opened at the bottom of the vertical wall 26, the distal end of the fixing plate 9 falls in the engagement step portion 10 by its deflection and engages with the engagement step portion 10.

When the pressure force is removed, repulsive force that returns the fixing plate 9 to the original position is produced in the fixing plate 9 by the curved connection portion, whereby there is no play in the engagement between the fixing plate 9 and the connection step portion 10 and the fixing plate 9 is not disconnected unless it is bent to disengage the fixing plate 9 from the connection step portion 10.

By the engagement between the distal end of the fixing plate 9 and the connection step portion 10, the fixing plate 9 functions as a strut member between the upper contact

plate 4 and the lower contact plate 5, and the upper and lower contact plates 4 and 5 are pressed against the upper and lower walls 22 and 23, respectively, to make tight the engagements between the engagement pieces 6 and 7 and the engagement recesses 24 and 25. Therefore, even if great tensile force is applied to the grip portion, the upper and lower contact plates 4 and 5 withstand the tensile force and prevents the handle 1 from being disconnected from the bottle.

10 To disconnect the handle 1, a thin-plate jig is inserted between the fixing plate 9 and the vertical wall 26, and the fixing plate 9 is forcedly bent to remove the distal end of the fixing plate 9 from the connection step portion 10.

15 In the handle 1 in which the fixing plate 9 to be engaged with the connection step portion 10 of the top end portion 8 of the lower contact plate 5 extends from the upper contact plate 4, it is not necessary to set the fixing plate 9 in such a manner that it does not fall in the space between
20 the upper and lower contact plates 4 and 5 at the time of attaching the fixing plate 9 unlike the case where the fixing plate is formed separately from the handle, and the handle 1 is simply pressed in directly to engage the distal end of the fixing plate with the connection step portion. Therefore,
25 the attachment work of the handle 1 is extremely simple and

can be made automatically without aid of human labor.

Since the fixing plate 9 is integrally molded with the handle 1, a mold for the fixing plate is not necessary and the fixing plate itself extends from the upper contact
5 plate 4. Therefore, the structure of the handle is not complex and only the handle is molded, thereby reducing molding costs. As a result, the handle can be produced at a low cost.



WHAT IS CLAIMED IS:

1. A synthetic resin handle which comprises a grip portion which is longitudinally long enough to extend from an upper edge to a lower edge of a recess in a side portion of a
5 bottle, an upper contact plate which projects inward and obliquely downward from the bottom of a holding portion provided on an upper end of the grip portion and has an engagement piece projecting upward and facing the holding portion, and a lower contact plate which is formed from a
10 lower end of the grip portion, bent inward and obliquely upward and has an engagement piece projecting downward at its distal end, wherein a connection step portion is formed in an upper end portion of the lower contact plate and a fixing plate having such a length that its distal end reaches the
15 inside of the connection step portion extends obliquely toward the grip portion by bending its connection portion with the upper contact plate.

2. A bottle having a handle comprising: a synthetic resin
20 bottle main body formed by stretch-blow molding and having a recess for attaching the handle on one surface of a thin side portion and engagement recesses which are long horizontally and formed in upper and lower walls of the recess; and a synthetic resin handle which comprises a rectangular grip
25 portion which is long enough to extend from an upper edge to



a lower edge of the recess in the side portion of the bottle,
an upper contact plate which projects inward and obliquely
downward from the bottom of a holding portion provided on an
upper end of the grip portion and has an engagement piece
5 projecting upward and facing the holding portion to form an
engagement recess in its upper portion, and a lower contact
plate which is formed from a lower end of the grip portion,
bent inward and obliquely upward and has an engagement piece
projecting downward at its distal end, wherein a connection
10 step portion is formed in an upper end portion of the lower
contact plate and a fixing plate having such a length that
its distal end reaches the inside of the connection step
portion extends obliquely toward the grip portion by bending
its connection portion with the upper contact plate, wherein
15 the handle is fixed in the side portion of the bottle by
integrating the upper and lower contact plates through the
engagement between the engagement pieces of the upper and
lower contact plates inserted into upper and lower surfaces
of the recess in the side portion of the bottle and the
20 engagement recesses in the upper and lower walls of the
recess and the engagement between the fixing plate and the
connection step portion in the top end portion of the lower
contact plate.

ABSTRACT OF THE DISCLOSURE

There is provided a handle comprising a grip portion 2 which is longitudinally long enough to extend from an upper edge to a lower edge of a recess 21 in a side portion of the bottle 20, an upper contact plate 4 which projects inward and obliquely downward from the bottom of a holding portion 3 provided on an upper end of the grip portion and has an engagement piece 6 projecting upward and facing the holding portion 3, and a lower contact plate 5 which is formed from a lower end of the grip portion, bent inward and obliquely upward and has an engagement piece 7 projecting downward at its distal end. A connection step portion 10 is formed in an upper end portion of the lower contact plate 5 and a fixing plate 9 having such a length that its distal end reaches the inside of the connection step portion 10 extends obliquely toward the grip portion by bending its connection portion with the upper contact plate 4. Since a fixing plate for contact plates which are formed from an upper end and a lower end of a grip portion and project toward the inner side of the grip portion is molded integrally with the grip portion, the handle can be firmly fixed in a recess in a side portion of a synthetic resin bottle.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

Fig.1


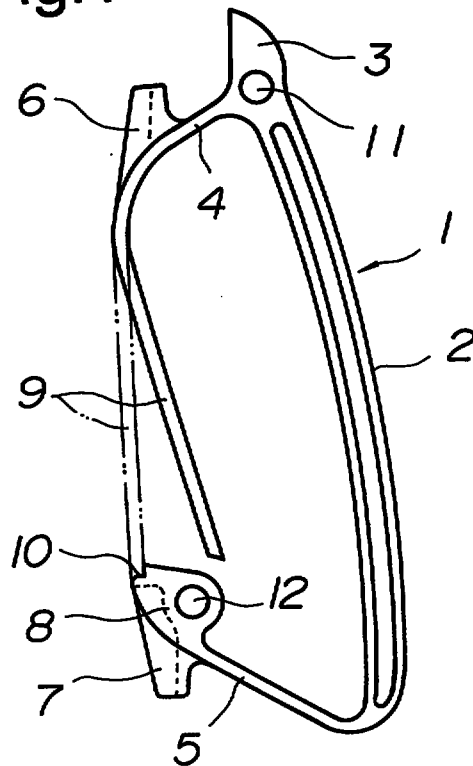



Fig.2

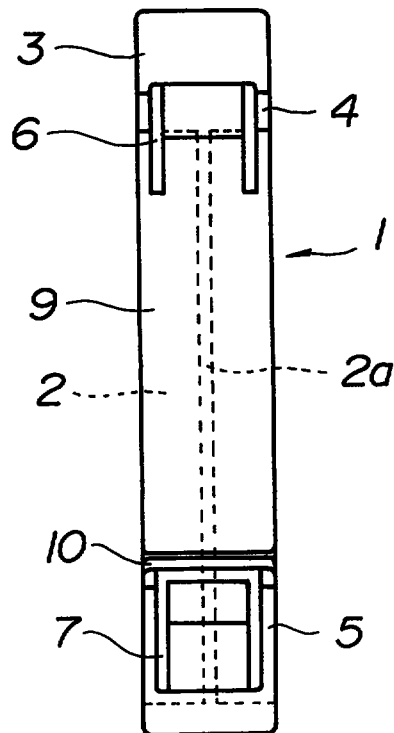

THIS SHEET HAS BEEN
REPLACED


2-8311078

Fig.3

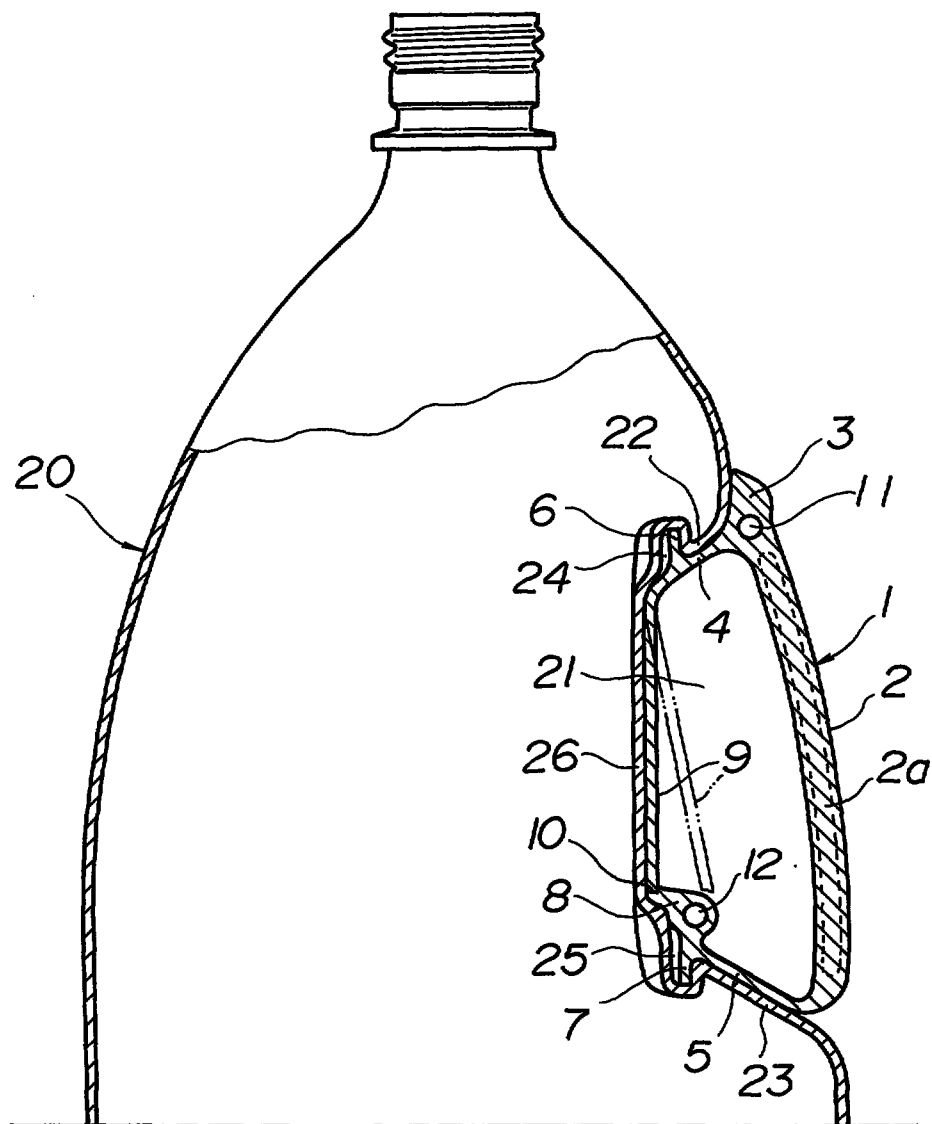


THIS SHEET HAS BEEN
REPLACED

Fig.4

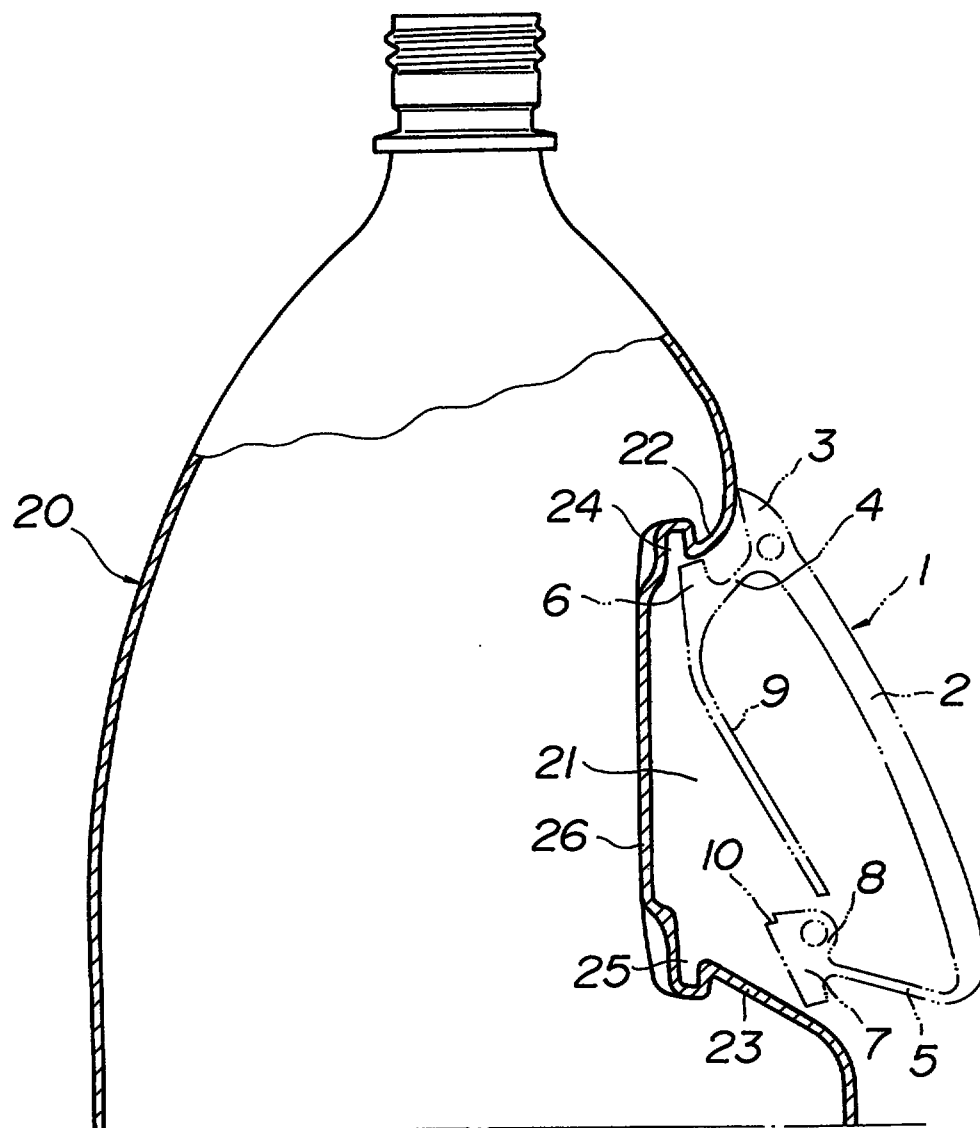

8-0371090

THIS SHEET HAS BEEN
REPLACED

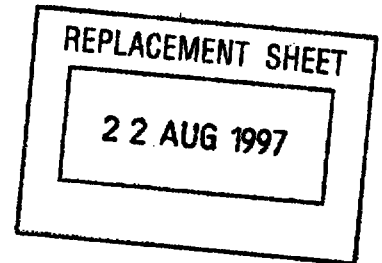

SPECIFICATION

TITLE OF THE INVENTION

SYNTHETIC RESIN HANDLE AND BOTTLE HAVING THE SAME

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

This invention relates to a synthetic resin handle for use with a synthetic resin bottle produced by stretch-blow molding and to a bottle having the handle which is attached to one surface of a thin side portion thereof.

10 2. Background Art

It is technically difficult to mold a handle integrally with a side portion of a synthetic resin bottle made from a thermoplastic resin such as polyethylene terephthalate, polypropylene or polycarbonate and formed by stretching and blowing a preform formed by injection molding in a blow mold to make thin the side portion thereof, unlike a thick resin bottle formed by blow molding. Therefore, a separately molded handle is attached to the side portion of the synthetic resin bottle, making use of insert molding or employing an engagement means after the bottle is molded.

As the synthetic resin bottle having a handle attached thereto, there is known one in which a doveled projection is provided at a handle attachment position of a bottle main body, the handle main body is attached to the bottle main body by fitting the attachment engagement

SYNTHETIC RESIN HANDLE AND BOTTLE HAVING THE SAME

ABSTRACT OF THE DISCLOSURE


There is provided a handle comprising a grip portion 2 which is longitudinally long enough to extend from an upper edge to a lower edge of a recess 21 in a side portion of the bottle 20, an upper contact plate 4 which projects inward and obliquely downward from the bottom of a holding portion 3 provided on an upper end of the grip portion and has an engagement piece 6 projecting upward and facing the holding portion 3, and a lower contact plate 5 which is formed from a lower end of the grip portion, bent inward and obliquely upward and has an engagement piece 7 projecting downward at its distal end. A connection step portion 10 is formed in an upper end portion of the lower contact plate 5 and a fixing plate 9 having such a length that its distal end reaches the inside of the connection step portion 10 extends obliquely toward the grip portion by bending its connection portion with the upper contact plate 4. Since a fixing plate for contact plates which are formed from an upper end and a lower end of a grip portion and project toward the inner side of the grip portion is molded integrally with the grip portion, the handle can be firmly fixed in a recess in a side portion of a synthetic resin bottle.

Figure 3

REPLACEMENT SHEET


22 AUG 1997

1

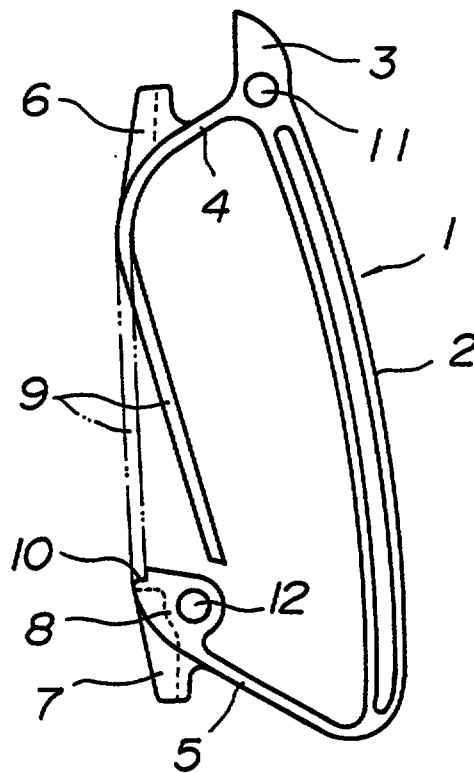


REPLACEMENT SHEET

22 AUG 1997

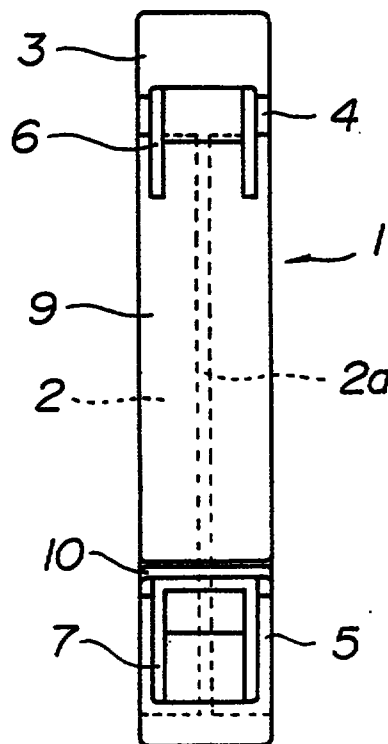

REPLACEMENT SHEET
22 AUG 1997

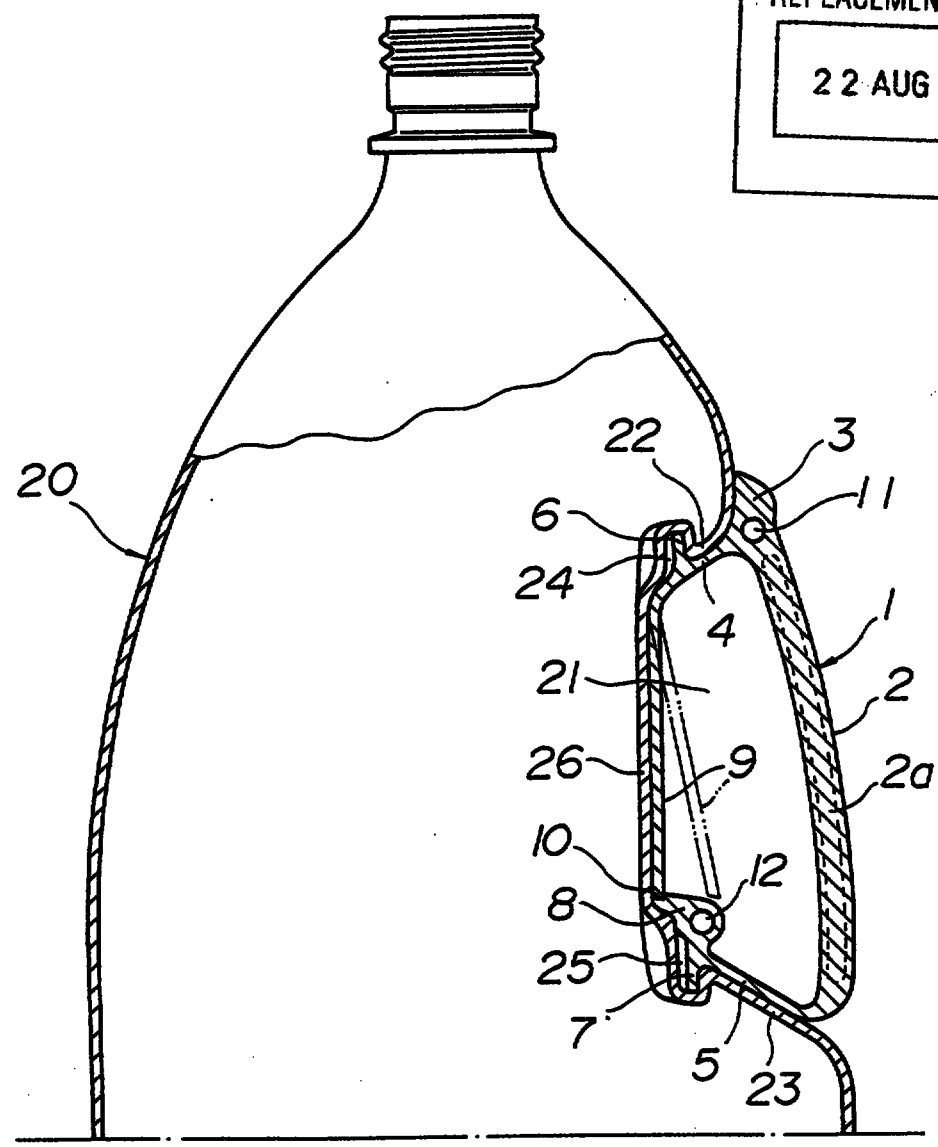

REPLACEMENT SHEET

22 AUG 1997

