

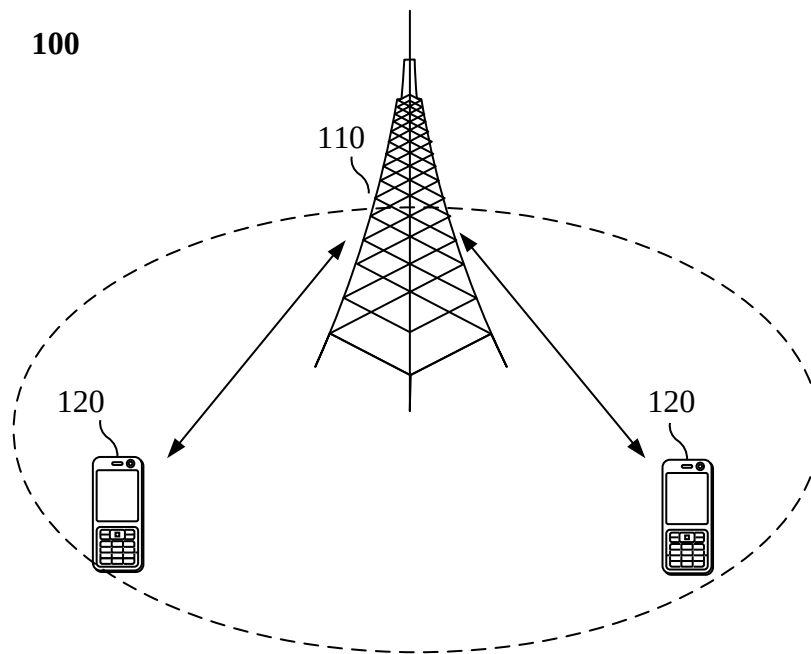


FIG. 1

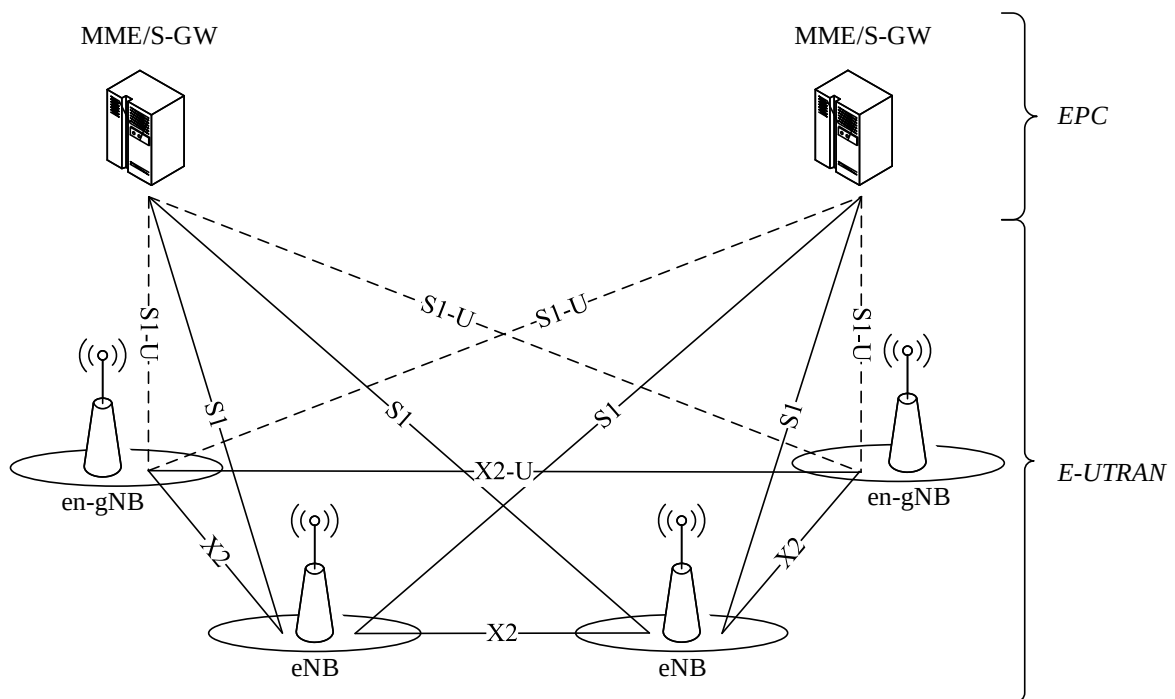


FIG. 2

a terminal sends at least one piece of capability indication information to a network, the at least one piece of capability indication information indicating whether the terminal supports measurement for at least one of a first frequency layer or a second frequency layer and reporting of a measurement result

301

FIG. 3

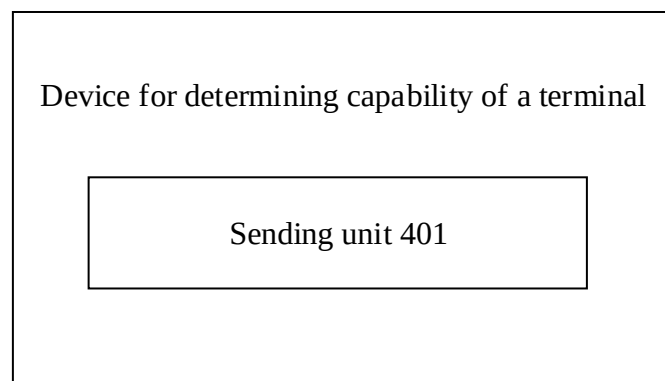


FIG. 4

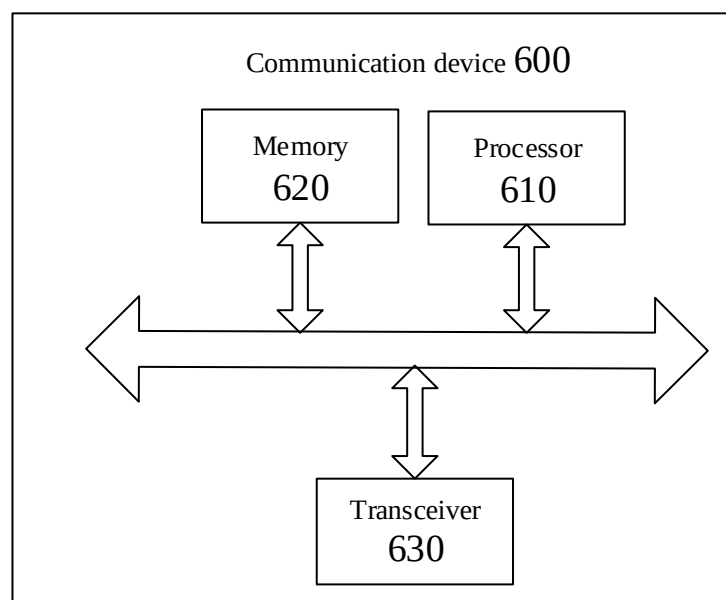


FIG. 5

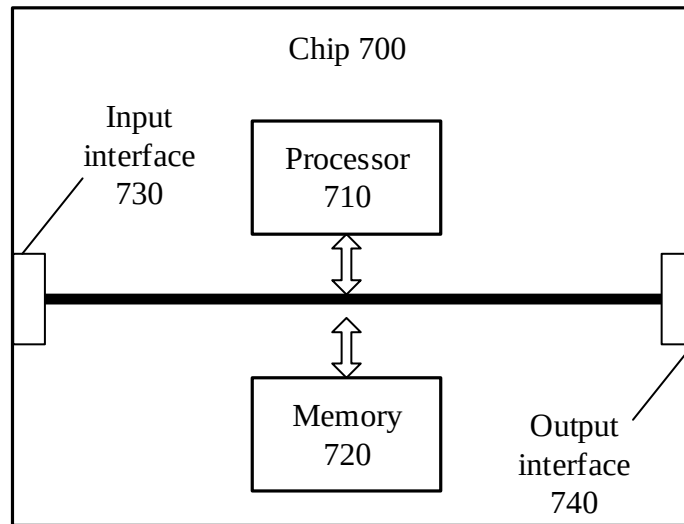


FIG. 6

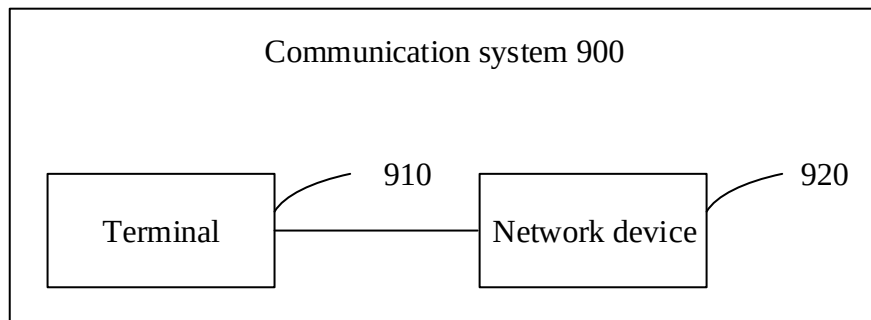


FIG. 7