



(51) International Patent Classification:

H04H 20/59 (2008.01) *H04B 7/00* (2006.01)
G08B 27/00 (2006.01) *H04L 29/00* (2006.01)

(21) International Application Number:

PCT/AU2015/000054

(22) International Filing Date:

3 February 2015 (03.02.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2014900324 4 February 2014 (04.02.2014) AU

(71) Applicant: **EMERGENCY WARNING SYSTEMS LIMITED** [AU/AU]; Level 4, 90 William Street, Melbourne, Victoria, 3000 (AU).(72) Inventors: **BRODA, Martin**; 6 Vida Court, Wantirna South, Victoria 3152 (AU). **CARTER, Ivan**; 68 Black Gully Road, Diamond Creek, Victoria, 3089 (AU).(74) Agent: **DOHERTY, Gavin Peter**; MDP Patent and Trade Mark Attorneys, PO Box 273, Collins Street West, Victoria, 8007 (AU).

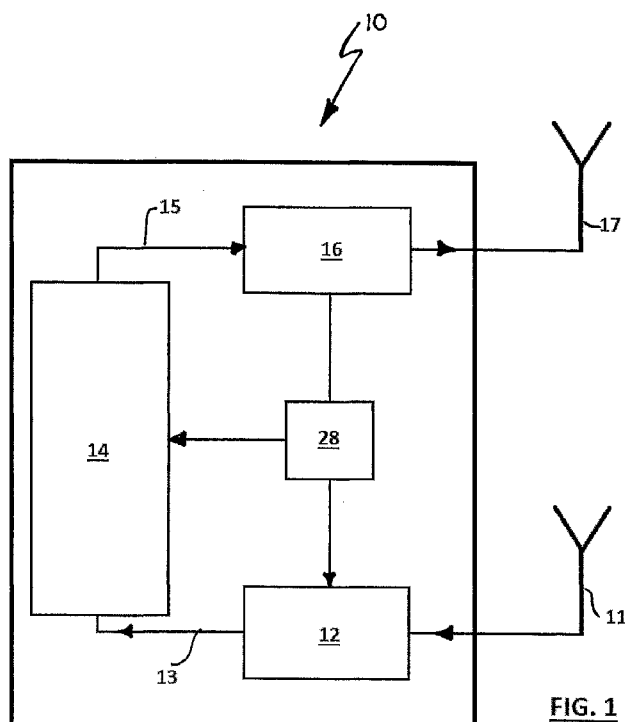
(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: INFORMATION COMMUNICATION SYSTEM

**FIG. 1**

(57) **Abstract:** T An apparatus (10) for transmitting a communication signal, across one or more pre-existing frequency channels or bands that carry a transmission signal, comprises a memory for storing at least one pre-existing frequency channel or band together with information relating to a strength of the transmission signal carried by the at least one pre-existing frequency channel or band. A controller (24) generates a communication signal to be transmitted across at least one of the channels or bands at a strength sufficient to over-broadcast the transmission signal carried. A mixer (26) receives each of the communication signals generated by the controller (24) and combines said communication signals into a combined mixed communication signal (15). A transmitter (16) transmits the combined mixed communication signal (15) across the at least one pre-existing frequency channels or bands either to replace or add the transmission signal carried by the at least one pre-existing frequency channel.