

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
30 December 2020 (30.12.2020)



(10) International Publication Number
WO 2020/263224 A1

(51) International Patent Classification:

E21B 21/08 (2006.01) *E21B 34/06* (2006.01)
E21B 21/10 (2006.01) *E21B 23/00* (2006.01)

(21) International Application Number:

PCT/US2019/038905

(22) International Filing Date:

25 June 2019 (25.06.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 3000 N. Sam Houston Parkway E., Houston, Texas 77032 (US).

(72) Inventors: **ZACHARIAH, Jacob**; Block 445, 09-48, Yishun Ave 11, Singapore 760445 (SG). **COFFIN, Maxime Philippe**; Salyan Highway 16 Km Lokbatan Settlement, Salt Lake Building, Baku, BAK AZ1032 (AZ).

(74) Agent: **BRYAN, Jason W.** et al.; Polsinelli PC, 1000 Louisiana Street, Suite 6400, Houston, Texas 77002 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: MULTIPLE PORT OPENING METHOD WITH SINGLE PRESSURE ACTIVATION

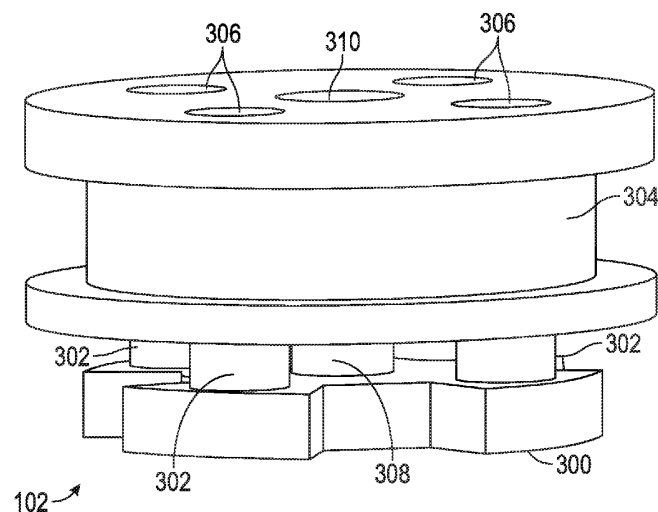


FIG. 3

(57) Abstract: A flow control apparatus with a guide housing having one or ports, a breakable bond, and a platform with an upper surface having one or more pistons. The platform and guide housing have a first bonded configuration where the pistons are received in the ports, a breaking configuration, an opening configuration where the platform is movable away from the guide housing, and a misaligned configuration where the platform is displaced with respect to the guide housing. The guide housing has a guide bore and the platform has a guide projection extending into the guide bore. The guide bore has a groove and the guide projection has an extension extending in the groove for transitioning between configurations.

[Continued on next page]

WO 2020/263224 A1

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*