



(51) International Patent Classification:

B65G 17/06 (2006.01) *B65G 21/18* (2006.01)
B65G 17/08 (2006.01) *B65G 17/10* (2006.01)

(21) International Application Number:

PCT/EP2011/070954

(22) International Filing Date:

24 November 2011 (24.11.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1051354-7 21 December 2010 (21.12.2010) SE

(71) Applicant (for all designated States except US): **JOHN BEAN TECHNOLOGIES AB** [SE/SE]; Box 913, S-251 09 Helsingborg (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MALMBERG, Jonny** [SE/SE]; Bruksgatan 28, S-252 23 Helsingborg (SE). **GRAMBY, Göran** [SE/SE]; Trädgårdsvägen 23, S-237 35 Bjärred (SE). **SOLMINGER, Jan** [SE/SE]; Sotaregatan 4, S-265 33 Åstorp (SE). **WILTHORN, Urban** [SE/SE]; Stormgatan 52, S-261 38 Landskrona (SE).

(74) Agent: **ÅKESSON, Jan-Åke**; Box 1066, S-251 10 Helsingborg (SE).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: IMPROVED LATERAL PLATE ELEMENT FOR A LINK MEANS INCLUDED IN A SELF-STACKING ENDLESS CONVEYOR BELT

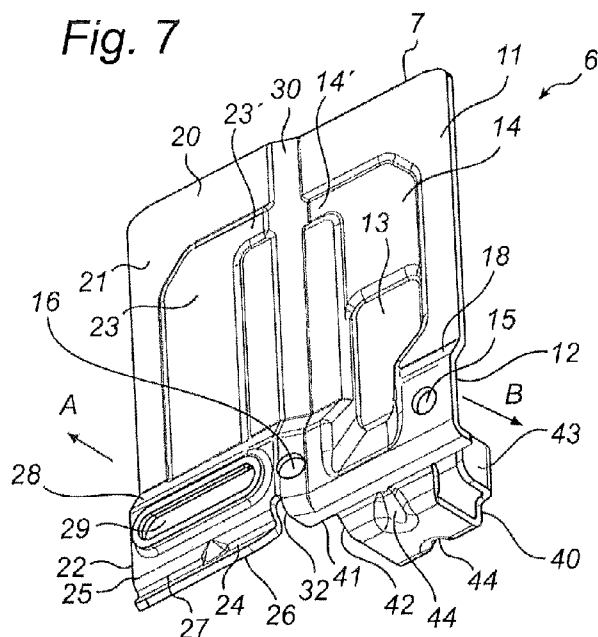

ity of said link means (4, 4') being interconnected.

(57) Abstract: The disclosure relates to a lateral plate element (6, 6') for a link means (4, 4') included in a self-stacking endless conveyor belt (1), in which the conveyor belt (1) extends helically along part of its length. The lateral plate element, comprises an outer plate section (10), an inner plate section (20) and a bridging plate section (30) bridging said outer and inner plate sections (10, 20). Said outer plate section (10) comprises a top subsection (11) extending in a first plane and wherein said inner plate section (20) comprises a top subsection (21) extending in a second plane, said second plane being offset, in an inward direction (A), with regard to said first plane. Said outer plate section (10) further comprises a bottom subsection (12) arranged in a bottom part of said outer plate section (10) and extending in a third plane being offset in said inward direction (A) with regard to said first plane. Said inner plate section (20) further comprises a bottom subsection (22) arranged in a bottom part of said inner plate section (20) and extending in a fourth plane being offset in said inward direction (A) with regard to said second plane. The lateral plate element further comprises a reinforcement (13) extending between the top subsection (11) and the bottom subsection (12) of the outer plate section (10). The disclosure also relates to a link means (4, 4') comprising at least one transverse rod (5, 5') and two of said lateral elements (6, 6'). Further, the disclosure also relates to a self-stacking endless conveyor belt (1) comprising a plural-