

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 January 2008 (24.01.2008)

PCT

(10) International Publication Number
WO 2008/009116 A1

(51) International Patent Classification:

E04B 1/98 (2006.01) **F16F 7/00** (2006.01)
E04H 9/00 (2006.01)

(21) International Application Number:

PCT/CA2007/001269

(22) International Filing Date: 19 July 2007 (19.07.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

11/489,187 19 July 2006 (19.07.2006) US

(71) Applicants and

(72) Inventors: **DOWNEY, Paul C.** [CA/CA]; 33 Craighurst Avenue, Toronto, Ontario M4R 1J9 (CA). **WILKINSON, William T.** [CA/CA]; 223 Glenholme Avenue, Toronto, Ontario M6E 3C6 (CA).


(74) Agents: **POWELL, Matthew D.** et al.; 330 University Avenue, 6th Floor, Toronto, Ontario M5G 1R7 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ENERGY TRANSMISSION CONTROL MOUNT

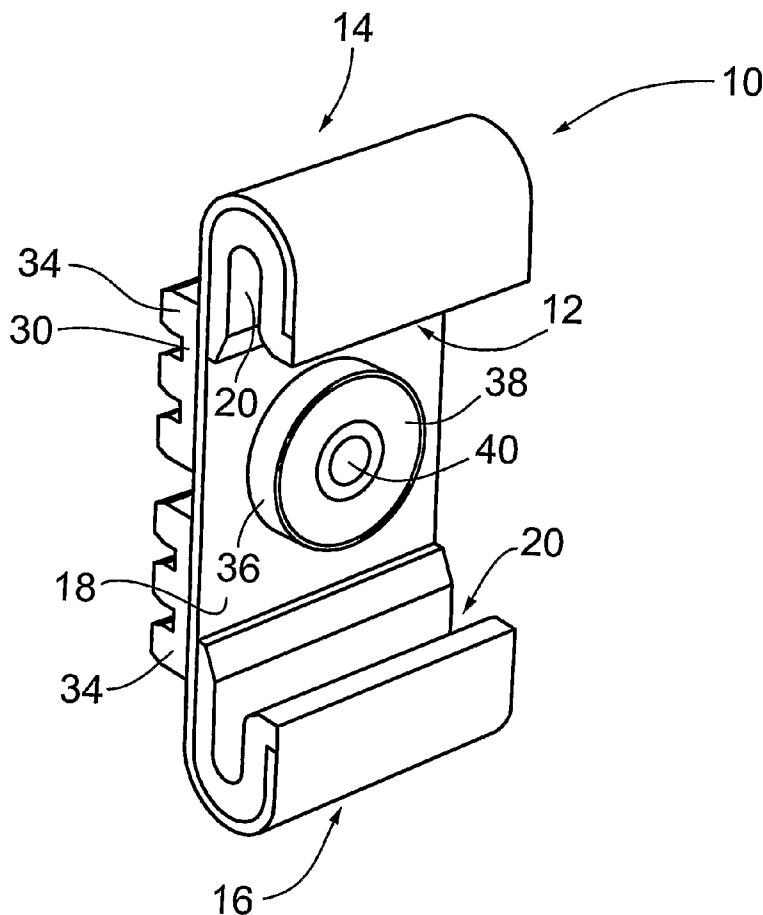

(57) Abstract: An energy transmission control mount comprises a carrier having a first major surface, an opposite second major surface and an aperture provided therein. Channels are provided adjacent opposite ends of the first surface. Vibration dampening material is provided on the carrier. The vibration dampening material substantially lines the channels and the aperture and extends over at least a portion of the second surface.



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.