



(51) International Patent Classification:

A62C 35/58 (2006.01) A62C 35/02 (2006.01)
A62C 35/68 (2006.01) A62C 37/10 (2006.01)

(21) International Application Number:

PCT/US2011/056128

(22) International Filing Date:

13 October 2011 (13.10.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **UTC FIRE & SECURITY CORPORATION** [US/US]; 9 Farm Springs Road, Farmington, Connecticut 06032 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STUMM, Brian J.** [US/FI]; Laivastokatu 4B 18, FI-00160 Helsinki (FI). **THOMAS, Stephanie C.** [US/US]; 24 Church Hill Street, Milford, Massachusetts 01757 (US).

(74) Agents: **GASKEY, David J.** et al.; Carlson, Gaskey & Olds, 400 W. Maple Road, Suite 350, Birmingham, Michigan 48009 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: DEVICE FOR INTRODUCING AN AGENT INTO A FIRE SUPPRESSION SYSTEM

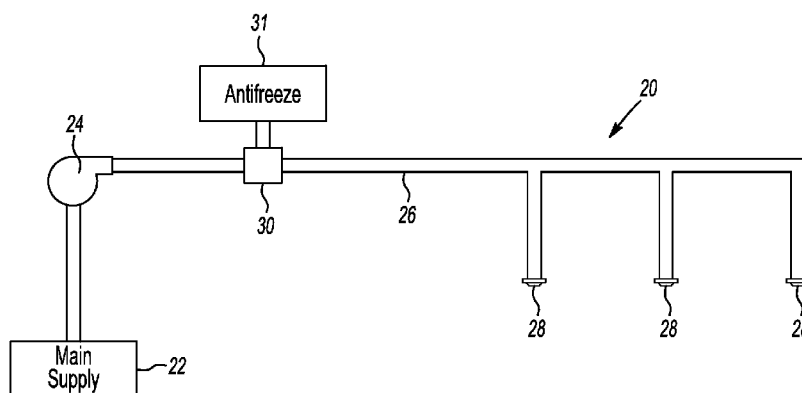


Fig-1

(57) Abstract: An exemplary device for introducing an agent into a fire suppression fluid includes a housing having an inlet configured to receive the agent into the housing. The housing also has an outlet configured to release the agent from the housing. A stopper is moveable between a closed position where the stopper prevents passage from the inlet to the outlet and an open position where the inlet is in communication with the outlet. A vane causes movement of the stopper from the closed position to the open position responsive to contact between the vane and fire suppression fluid flowing past the vane.