



(51) International Patent Classification:
E05B 17/04 (2006.01)

WINARDI, Michael [US/US]; 16397 Fox Hollow Way,
Chino Hills, CA 91709 (US).

(21) International Application Number:
PCT/US2011/041403

(74) Agent: **VELTMAN, Richard**; 701 E. Joppa Road,
TW-199, Towson, MD 21286 (US).

(22) International Filing Date:
22 June 2011 (22.06.2011)

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/358,452 25 June 2010 (25.06.2010) US

(71) Applicant (*for all designated States except US*):
NEWFREY LLC [US/US]; 1207 Drummond Plaza,
Newark, DE 19711 (US).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **BUI, Jeanette, Vy**
[US/US]; 3782 Magnolia Street, Irvine, CA 92606 (US).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

[Continued on next page]

(54) Title: MORTISE LOCK CYLINDER

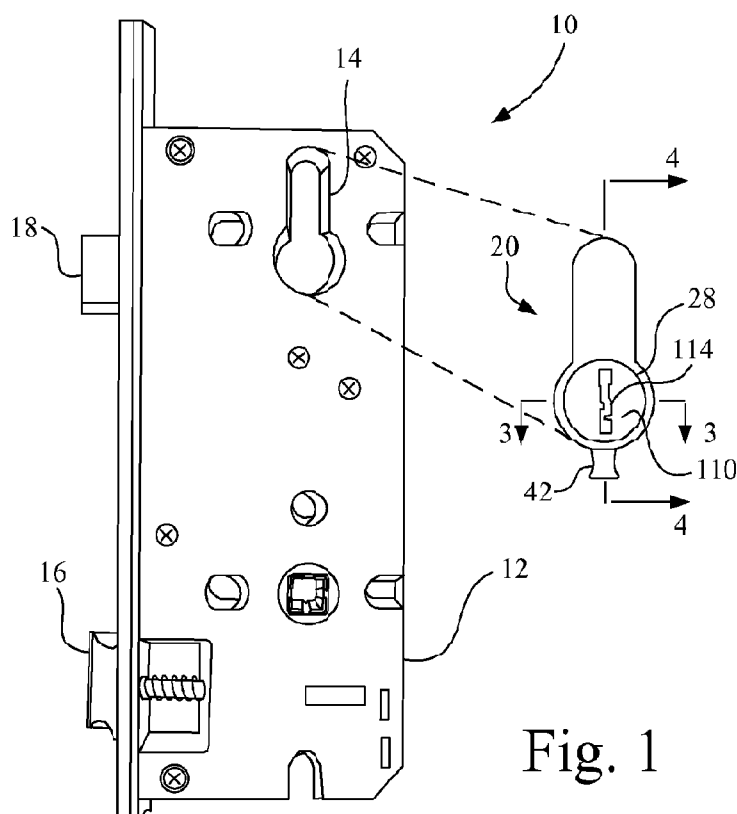


Fig. 1

(57) Abstract: A mortise lock cylinder includes a turn-piece assembly including a turn-piece in driving engagement with a first clutch. A keyed cylinder assembly includes a plug body in driving engagement with a second clutch. A first portion of the turn-piece assembly is received in the first end of a housing and a second portion of the keyed cylinder assembly is received in the second end of the housing. A cam is positioned in the cam slot and mounted for rotation. The mortise lock cylinder is configured such that the cam always is drivably engaged with the first clutch, and configured such that the second clutch is drivably coupled to the cam via the first clutch when the key is inserted into the keyed cylinder assembly.



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*