


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01R 23/72, 23/68	A1	(11) International Publication Number: WO 96/24969 (43) International Publication Date: 15 August 1996 (15.08.96)
(21) International Application Number: PCT/US95/16465 (22) International Filing Date: 15 December 1995 (15.12.95) (30) Priority Data: 7/21737 9 February 1995 (09.02.95) JP (71) Applicant (for all designated States except US): THE WHITAKER CORPORATION [US/US]; Suite 450, 4550 New Linden Hill Road, Wilmington, DE 19808 (US). (72) Inventor; and (75) Inventor/Applicant (for US only): KUSUHARA, Toshitaka [JP/JP]; 1-14-1, Kamoi, Midori-ku, Yokohama-shi, Kanagawa (JP). (74) Agents: ANASTASI, Salvatore et al.; The Whitaker Corporation, Suite 450, 4550 New Linden Hill Road, Wilmington, DE 19808 (US).	(81) Designated States: BR, CN, KR, NO, SG , US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.	

(54) Title: ELECTRICAL CONNECTOR FOR PRINTED CIRCUIT BOARDS

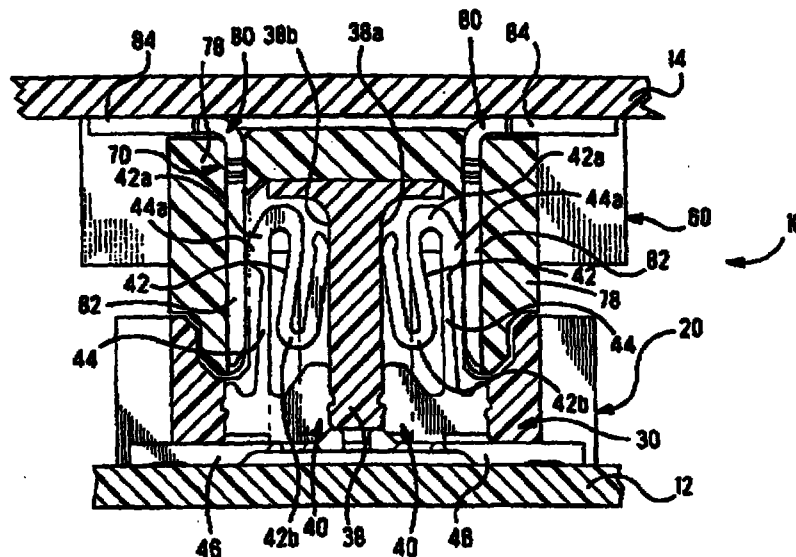

(57) Abstract

The object of the present invention is to provide an electrical connector which makes it possible for the contacts to electrically contact each other with a high contact pressure even when the contacts are made smaller and shorter. Contacts (40 and 80) which electrically contact each other are respectively secured in housings of a plug connector (20) and a cap connector (60), with the contacts being positioned in two rows in each connector. When the plug connector (20) and cap connector (60) are connected, first and second spring members (42 and 44) of the contacts (40) are clamped between wall surfaces (38a and 38b) of the housing (30) and the contact sections (82) of the contacts (80), so that the contacts (40 and 80) are springably pressed strongly against each other.