



(51) International Patent Classification:

A44C 5/00 (2006.01) G09F 3/10 (2006.01)
B42D 15/00 (2006.01)

(21) International Application Number:

PCT/CA2013/000374

(22) International Filing Date:

23 April 2013 (23.04.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2,775,274 23 April 2012 (23.04.2012) CA

(71) Applicant: **MEDIREX SYSTEMS INC.** [CA/CA]; 499
Queen Street East, Toronto, Ontario M5A 1C1 (CA).

(72) Inventor: **WENSTEIN, Barry B.**; 916 Briar Hill Ave.,
Toronto, Ontario M6B 1M2 (CA).

(74) Agent: **CARSON, James W.**; Blaney McMurtry LLP,
Suite 1500, 2 Queen Street East, Toronto, Ontario M5C
3G5 (CA).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FORM HAVING DETACHABLE WRISTBANDS

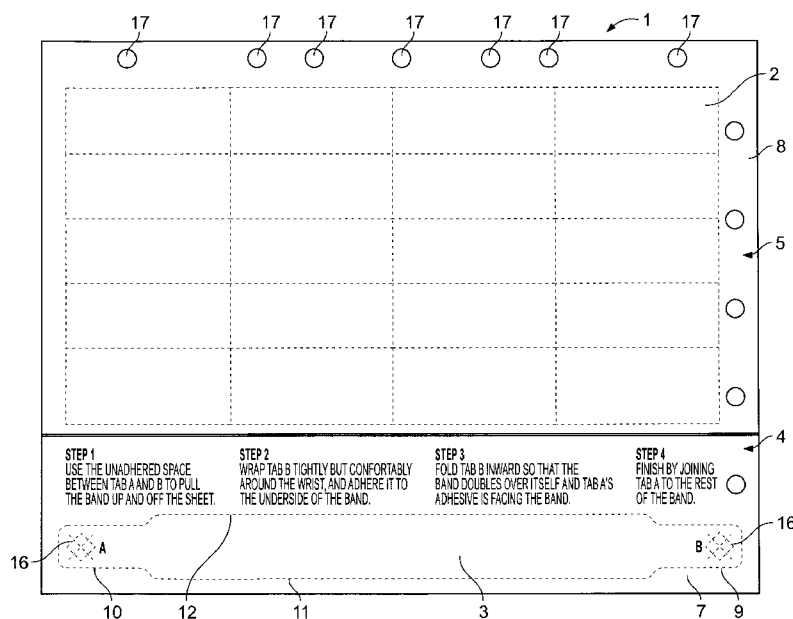


FIG. 1

(57) Abstract: A form having a printable nylon taffeta face ply and a liner ply where the face ply is die cut to form one or more blank detachable wristbands having first and second ends. The face ply is adhered to the liner ply by a pressure sensitive adhesive included on at least a portion of its bottom surface and the pressure sensitive adhesive is included on the face ply around the periphery of the one or more wristbands and on a bottom surface of the first and second ends of each of the wristbands. Each of the first and second ends of the wristbands is provided with tamper evident indicia.