



(43) International Publication Date
26 October 2012 (26.10.2012)

(51) International Patent Classification:

E04H 17/04 (2006.01) *E04G 1/00* (2006.01)
E04G 5/04 (2006.01) *E04G 21/32* (2006.01)

(21) International Application Number:

PCT/AU2011/001165

(22) International Filing Date:

9 September 2011 (09.09.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2011100520 9 May 2011 (09.05.2011) AU
13/197,565 3 August 2011 (03.08.2011) US

(71) Applicant (for all designated States except US): **BLH SAFETY SOLUTIONS PTY LTD** [AU/AU]; 200 Flinders Street, Beauty Point, TAS 7270 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **GILL, Shane** [AU/AU]; 200 Flinders Street, Beauty Point, TAS 7270 (AU).

(74) Agent: **PHILLIPS ORMONDE FITZPATRICK**; Level 21, 22 & 23, 367 Collins Street, Melbourne Victoria 3000 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- upon request of the applicant, before the expiration of the time limit referred to in Article 21(2)(a)

(54) Title: SAFETY BARRICADE SYSTEM

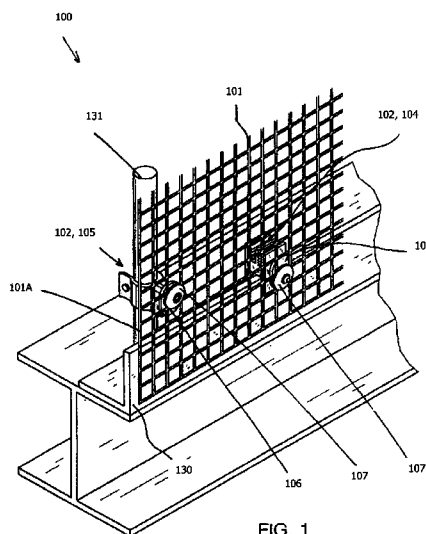


FIG. 1

(57) Abstract: A barricade system (100) comprising at least one dip (102) having a first engagement formation (104A, 105A) adapted to secure the clip (102) to a fixed structure, the clip further having a second engagement formation (104C, 105G). The system (100) includes a joiner element (106) having a third engagement formation (106A) located on a first side, and a fourth engagement formation (106B) located on an opposing second side, the third engagement formation (106A) being adapted to engage the second engagement formation (104C, 105G) to secure the joiner element (106) to the clip (102). The system (100) includes at least one mesh panel (101) and a stopper element (107) having a fifth engagement formation (107A). The fifth engagement formation (107A) is engageable with the fourth engagement formation (106B) to secure the stopper element (107) to the joiner element (106) with a portion of the mesh panel (101) located therebetween.

