

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 October 2008 (09.10.2008)

PCT

(10) International Publication Number
WO 2008/121302 A1

(51) International Patent Classification:
C10M 127/06 (2006.01)

(74) Agents: PURWIN, Paul, E. et al.; Exxonmobil Research And Engineering Company, 1545 Route 22 East, P.o. Box 900, Annandale, NJ 08801-0900 (US).

(21) International Application Number:
PCT/US2008/004009

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 27 March 2008 (27.03.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/921,283 30 March 2007 (30.03.2007) US
12/077,833 21 March 2008 (21.03.2008) US

(71) Applicant (for all designated States except US): **EXXON-MOBIL RESEARCH AND ENGINEERING COMPANY** [US/US]; 1545 Route 22 East, P.o. Box 900, Annandale, NJ 08801-0900 (US).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WU, Margaret, M.** [US/US]; 45 Richmond Drive, Skillman, NJ 08558 (US).
BAILLARGEON, David, J. [US/US]; 112 Morningside Drive, Cherry Hill, NJ 08003 (US).

Published:
— with international search report

(54) Title: LUBRICATING OIL COMPOSITIONS HAVING IMPROVED LOW TEMPERATURE PROPERTIES

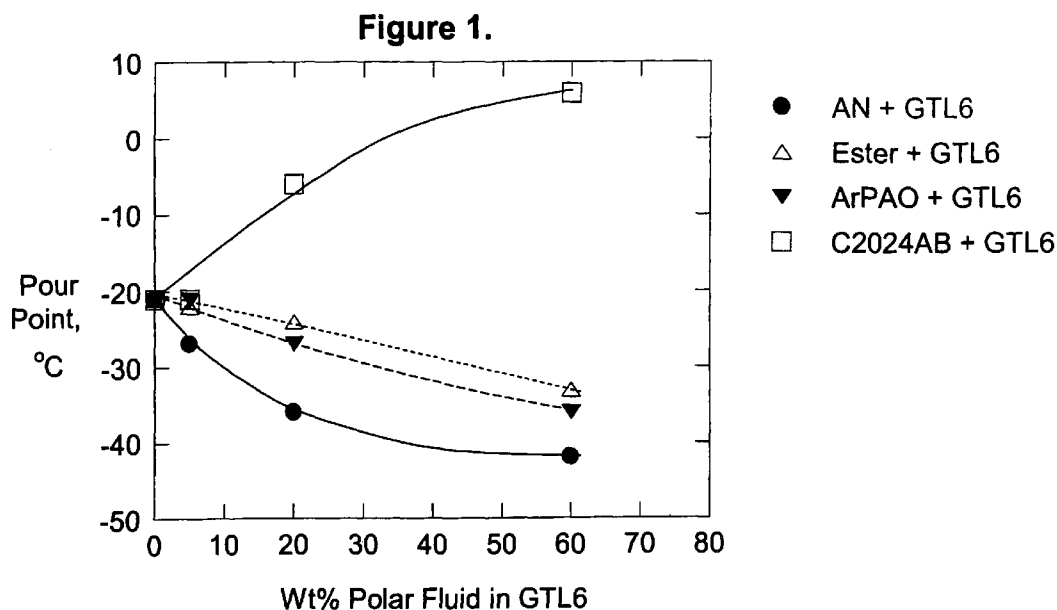

(57) Abstract: A lubricating base oil is disclosed comprising a mixture of gas-to- liquids (GTL) base stock/base oil, hydrodewaxed or hydroisomerized/catalytic (and/or solvent) dewaxed wax derived base stock/base oil and from about 1 to 95% by weight of an alkylated naphthalene or alkylated benzene synthetic oil having a pour point of 00C or less. The pour point of the base oil is dramatically lowered by the addition of the synthetic oil.