



(51) International Patent Classification:
G01R 31/00 (2006.01)

(21) International Application Number:
PCT/US2010/033855

(22) International Filing Date:
6 May 2010 (06.05.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/213,121 8 May 2009 (08.05.2009) US

(71) Applicant (for all designated States except US): **FEDERAL EXPRESS CORPORATION** [US/US]; 3610 Hacks Cross Road, Memphis, TN 38125 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LEMMON, Andrew, N.** [US/US]; 874 Schilling Farm Road, Apt. 104, Collierville, TN 38017 (US).

(74) Agent: **GARRETT, Arthur, S.**; Finnegan, Henderson, Farabow, Garrett, & Dunner, L.L.P., 901 New York Avenue, NW, Washington, DC 20001-4413 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: SYSTEMS AND METHODS FOR CONDUCTING EMI SUSCEPTIBILITY TESTING

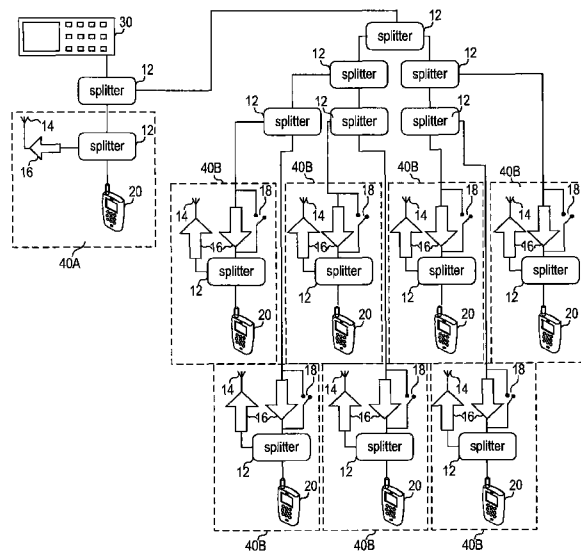


Figure 2

(57) Abstract: System and methods for performing EMI susceptibility testing of a device is disclosed. A system may include an EMI generation unit that includes a plurality of EMI generating devices, where each EMI generating device generates EMI having substantially similar characteristics relative to EMI generated by other EMI generating devices in the system. Each EMI generating device is controlled by a controller that is configured to emulate at least partly a live cellular network.



(88) Date of publication of the international search report:
27 January 2011