

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
25 January 2001 (25.01.2001)

PCT

(10) International Publication Number
WO 01/05496 A1

- (51) International Patent Classification: B01J 8/18, 8/24, F27B 15/08
- (21) International Application Number: PCT/US00/18321
- (22) International Filing Date: 30 June 2000 (30.06.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/352,985 14 July 1999 (14.07.1999) US
- (71) Applicant: INTERCAT EQUIPMENT, INC. [US/US];
P.O. Box 412, Sea Girt, NJ 08750 (US).
- (72) Inventor: EVANS, Martin; 125 Anderson Road, Tolland,
CT 06084 (US).
- (74) Agents: CARSON, W., Scott et al.; Dorr, Carson, Sloan &
Birney, P.C., 3010 E. 6th Avenue, Denver, CO 80206 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS AND PROCEDURES FOR REPLENISHING PARTICULATE MATERIALS

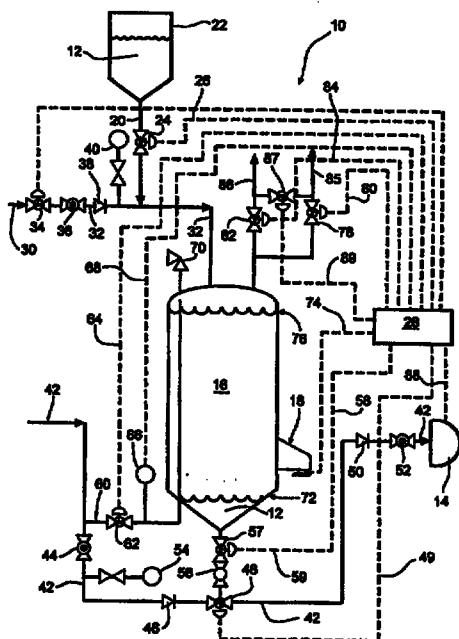

(57) Abstract: Injection of particulate materials (12) into industrial processes (14) can be improved through use of a vessel (16) mounted on a weighing device (18) and which is vented through use of two separate and distinct valves (78, 82). Optionally, a predetermined pressure in the vessel (16) is maintained through use of a pressure transmitter (66) and an on/off mode (28) of operation.

WO 01/05496 A1