



(43) International Publication Date
24 October 2013 (24.10.2013)

(51) International Patent Classification:

A61F 13/15 (2006.01) *B65G 21/20* (2006.01)
B29C 65/78 (2006.01) *B65G 47/28* (2006.01)
B29C 53/18 (2006.01)

(21) International Application Number:

PCT/US2013/035216

(22) International Filing Date:

4 April 2013 (04.04.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/447,568	16 April 2012 (16.04.2012)	US
------------	----------------------------	----

(71) Applicant: THE PROCTER & GAMBLE COMPANY

[US/US]; One Procter & Gamble Plaza, Cincinnati, Ohio 45202 (US).

(72) **Inventors:** PAPSDORF, Clifford, Theodore; 439 Branch

SCHNEIDER, Uwe; 520 Chisholm Trail, Cincinnati, Ohio 45215 (US).

(74) Agent: GUFFEY, Timothy B.; C/o The Procter & Gamble

Company, Global Patent Services, 299 East 6th Street, Sy-
camore Building, 4th Floor, Cincinnati, Ohio 45202 (US).

(81) Designated States (*unless otherwise indicated, for every*

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every*

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, NI, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FLUID SYSTEMS AND METHODS FOR TRANSFERRING DISCRETE ARTICLES

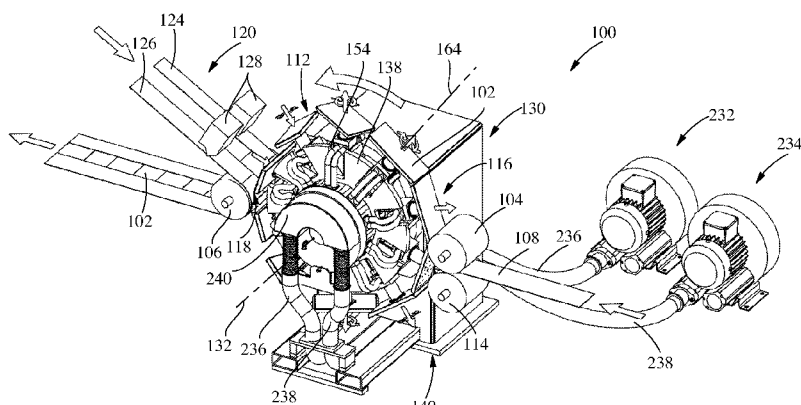


Fig. 1

(57) Abstract: The present disclosure is directed to a method of applying a fluid pressure to a portion of a transfer member of a transfer assembly. The transfer member rotates about a first rotation axis and comprises leading and trailing portions. The portion of the transfer member is rotatable about a second rotation axis between a first position and a second position. The method comprises providing a fluid conduit in fluid communication with the leading or trailing portion of the portion of the transfer member when the portion of the transfer member is in the first position, rotating the portion of transfer member between the first position and the second position, and maintaining the fluid conduit in fluid communication with the same of the leading or trailing portion of the portion of the transfer member after the portion of the transfer member is moved into the second position.