



(51) International Patent Classification:

B07B 1/46 (2006.01) **B01D 33/03** (2006.01)
B07B 13/16 (2006.01) **B01D 33/44** (2006.01)

(21) International Application Number:

PCT/GB2011/050714

(22) International Filing Date:

11 April 2011 (11.04.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/771,201 30 April 2010 (30.04.2010) US

(71) Applicant (for all designated States except US): **NATIONAL OILWELL VARCO, L.P.** [US/US]; 7909 Parkwood Circle Drive, Houston, TX 77036 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BURNETT, George, Alexander** [GB/GB]; Heath Cottage, Ruthrieston Road, Aberdeen, Aberdeenshire AB10 7JR (GB). **LARSON, Thomas Robert** [US/US]; 1015 Chicksaw Drive, Montgomery, TX 77316 (US).

(74) Agent: **LUCAS, Phillip, Brian**; Lucas & Co., 135 West-hall Road, Warlingham, Surrey CR6 9HJ (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR SEPARATING SOLIDS FROM A SOLIDS LADEN DRILLING FLUID

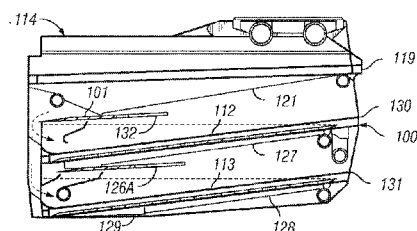


Fig. 3




Fig. 3A




Fig. 3B

(57) Abstract: A shale shaker for separating solids from solids laden drilling fluid, said shale shaker comprising a basket (100) having a first screen assembly (122a, 122b) in an upper screen deck (112) and a second screen assembly (125a, 125b) in a lower screen deck (113), the basket (100) further comprising a flow tray (121) for feeding solids laden drilling fluid to a first duct (107A-D) and a second duct (108A-D), the first duct (107A-D) for feeding solids laden drilling fluid to the first screen assembly (122a, 122b) and the second duct (108A-D) feeding solids laden drilling fluid to the second screen assembly (125a, 125b) characterised in that the second duct (108A-D) comprises a plurality of second duct openings (103A-D) for dividing the feed of solids laden drilling fluid and at least one discharge opening (110B, 110D) for dispersing said solids laden drilling fluid on to the second screen assembly (122a, 122b; 125a, 125b).



Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

(88) Date of publication of the international search report:

25 April 2013