

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




9805499-2
1905

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F41A 19/64	A1	(11) International Publication Number: WO 97/42461 (43) International Publication Date: 13 November 1997 (13.11.97)
(21) International Application Number: PCT/US97/05944 (22) International Filing Date: 10 April 1997 (10.04.97) (30) Priority Data: 08/642,912 6 May 1996 (06.05.96) US (71) Applicant: COLT'S MANUFACTURING COMPANY, INC. [US/US]; 545 New Park Avenue, West Hartford, CT 06110 (US). (72) Inventor: ROBBINS, Laurance, E.; 7 Sunrise Terrace, Plainville, CT 06062 (US). (74) Agent: GREEN, Clarence, A.; Perman & Green, 425 Post Road, Fairfield, CT 06430 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: **FOUR POSITION FIREARM FIRE CONTROL SELECTOR**

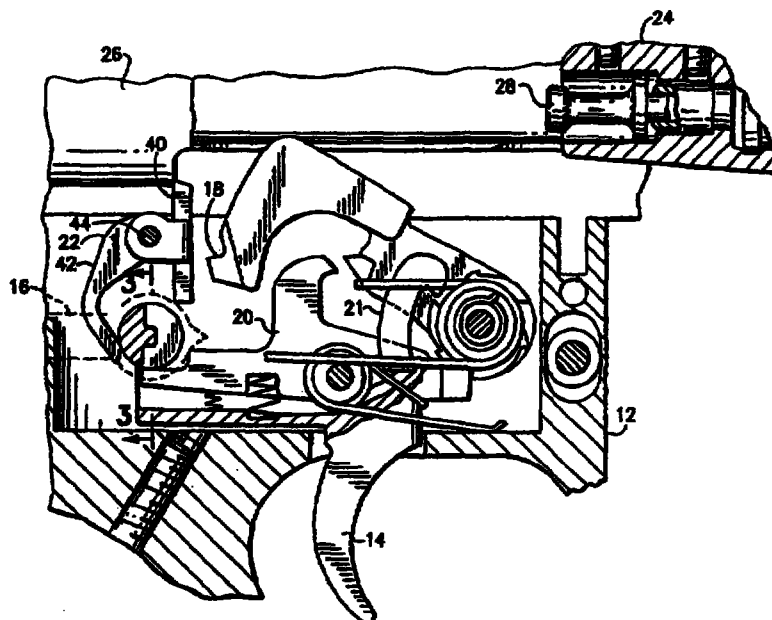

(57) Abstract

A firearm with a trigger (14), a hammer, an automatic sear (18), and a selector switch (16) connected to a rotatable firing control cam (30) for selecting among types of firing selections of the firearm. The types of firing selections include safe, semi-automatic, limited automatic burst, and full automatic. The control cam (30) has a section with a general cross-sectional mushroom shape that is contacted by a leg (42) from the automatic sear. The leg has a bend and extends under a center (C) of the control cam (30) in at least two positions of the control cam (30).