

METHOD AND APPARATUS
FOR CREATING PATTERNS IN CAST MATERIALS

FIELD OF THE INVENTION

The present invention relates to ornamental
5 structures and surfaces, more particularly to cast
structures and surfaces, and most particularly to cast
cement-based structures which have integral color
patterns and to a method of making such structures and
surfaces whereby control over the pattern is achieved to
10 the degree of being reproducible from one casting to the
next. The method of this invention is also readily
adaptable to automated procedures.

BACKGROUND OF THE INVENTION

There is a need to be able to create and
15 control patterns in cement and plaster or gypsum based
materials in both precast products and cast-on-site
pieces. At present, the ability to create and control
patterning in cement is extremely limited. Most
commonly, if an attractive stone appearance is desired on
20 a cement based material it is usually achieved by
covering with a veneer of granite or marble.

Some of the disadvantages of marbles and
granites which can be solved by this invention are lot-
to-lot variation in color and pattern, limits in size due
25 to costs of handling and transportation, difficulty in
showing continuous patterns of marble veins, and cost.

With regard to the problem of lot-to-lot variation and showing a continuous veining pattern, since marble and granite are natural materials, there is no control over the consistency of color and pattern from one piece to the next. It is often necessary to compare and match many different pieces to obtain a few which are sufficiently similar to be used to create a uniform appearance on a facing. As for size and cost, it is not practical to use marble in pieces larger than approximately four feet by eight feet.

The prior art is replete with methods to produce color and patterns in cast materials to simulate a natural stone appearance, such as marble or granite. However, in most instances there is little or no control over the pattern or its reproducibility. Furthermore, few, if any, of the prior art methods are readily adaptable to automation for consistent production of matching articles.

For example, U.S. Patent 27,022, Lamb, discloses a method for manufacturing artificial marble in which balls of cement are mixed up to a consistency of paste and partially coated with dry paint. The balls are then placed in a mold and compressed causing the moisture within each ball to penetrate the dry material and consolidate into a single mass. The dry paint then appears as streaks on the surface of the article produced. This method is time consuming and requires precision on the part of the practitioner to achieve any

degree of consistency from one piece to the next. Nor is it readily adaptable to an automated process.

U.S. Patent 106,263, Frear, discloses the manufacture of artificial marble in which a solution of
5 zinc sulphate, zinc chloride, sugar of lead, alum or salt is combined with a mixture of cement and silex to form a pasty mass having the consistency of mortar which is then cast in molds. By adding suitable colorants to the composition while it is in its plastic state or to the
10 solution with which it is moistened, imitations of marble are obtained. Clearly, colorants added to the plastic mass would require some mixing to achieve a marble-like pattern, similar to the process used in mixing the two colors of a marble cake batter.

15 U.S. Patent 134,300, Mellen, discloses a method of manufacturing artificial marble in which individual batches of cement of particular colors are prepared in separate vessels having small spouts. These are then individually poured into a mold in small streams in
20 imitation of the veins of marble and the area between these streams filled in with cement of another color. Air is then blown across the mold to cause the colors to flow and mingle together until the desired effect is achieved. For finer veins, threads are dipped in colors
25 and laid in the mold to be pulled through the cement after it is poured in. As with the Lamb patent, this method requires a degree of care and skill on the part of the practitioner to achieve any degree of consistency of

pattern from one piece to the next.

U.S. Patent 635,005, Summers, discloses artificial marble which is manufactured by mixing together lime-water and silicate of soda and adding a
5 cement until it is fully incorporated. Pigments mixed with dry cement are then added and agitated into the mixture by stirring with a suitable tool. This mixture is then poured into a mold and allowed to set. This method, whereby pigment is merely stirred into a base
10 mixture is the classic "marble cake" method and is very difficult to control from one casting to the next.

U.S. Patent 704,621, Czermak, discloses a process of manufacturing artificial marble in which cement, or the like, is spread upon a smooth surface and
15 allowed to partially set to form a slab. A liquid mass of mortar, or similar substance, having a color corresponding to the color of the veins desired is poured over the slab which is then cracked through its entire thickness with a suitable instrument to slightly displace
20 its component parts. The liquid mass enters the cracks and produces the artificial veins which penetrate from face to face of the slab. Since the shape and direction of cracking in the slab is dependent in part on the application of the instrument and in part on the
25 structure of the slab itself, it is unlikely that a great degree of consistency in pattern can be achieved from one piece to the next using this method. In addition, since cracking of the slab disrupts the internal structure,

this method has the added effect of weakening the slab.

U.S. Patent 928,061, Mitats, discloses an artificial marble which comprises portland cement, marble dust, sand, a colorant and water which are mixed together
5 and compressed in a mold. In this method, it is believed that the resulting product will be substantially of one color with the marble dust providing any variation which may be present.

U.S. Patent 2,280,488, Jenkins, et al.,
10 discloses a method and apparatus for making a stone like unit in which batches of colored concrete are premixed and added in layers to a blending box. A mixing grid is drawn vertically through the layers at least once to mix them in a variation of the "marble cake" method of the
15 Summers patent. After the layers are blended in this manner, the mixture is poured from the box into a mold.

U.S. Patent 5,248,338, Price discloses a colored marble concrete and a method of producing the same wherein a master mix of concrete of a desired
20 primary color is prepared. Secondary or accent colors are added to the surface of the master mix within a container, such as a bucket, and are stirred to create a swirl pattern in the colors. The stirred mix is then poured into a mold. As with Summers, this is the classic
25 "marble cake" method which is difficult to control from one casting to the next.

In contrast to the prior art, the present invention provides a method whereby color and pattern can

be controlled and replicated across many castings to provide uniformity of color and pattern as well as, where desired, continuous veining from one piece to the next. The method of this invention is adaptable to any size of
5 casting, both on and off-site, and to most means for transferring casting mixtures to a mold as well as to automated production systems for producing substantially consistent and identical articles.

SUMMARY OF THE INVENTION

10 The invention discussed herein provides one with the ability to create cement based cast articles which can be the equal in beauty of some of the finest marbles and granites, while having the advantages of cost, ability to control and replicate color and pattern,
15 as well as the ability to be created as needed, cast on site, and created in any size desired.

On-site castings can be as large as desired, in theory 20 feet by 100 feet or larger. The cost advantages of being able to readily produce a surface
20 having a controlled and reproducible pattern on-site versus the expense of selecting, cutting, shipping and erecting natural stone facings on a structure are readily evident.

Central to the invention is the ability to
25 control creation of a pattern in a castable material. This ability to control the pattern also renders it reproducible from one casting to the next. This control

is effected by means of the viscosity of a pouring mix, the geometric arrangement of two or more mixes prior to pouring, the placement of two or more mixes during pouring and the consolidation of the poured mix after placement. The present invention employs all of these means in a novel method whereby castable materials are geometrically arranged in a container according to a set formula or chart for a particular pattern and poured to produce patterned structures or surfaces wherein the pattern is consistent and reproducible each time the formula and pouring criteria are followed.

It is therefor an object of this invention to provide a method for creating multicolor designs and patterns in cast materials comprising the steps of:

- a) preparing a mold to receive casting mixtures;
- b) preparing at least two wet casting mixtures of different colors at a viscosity to facilitate controlled pouring thereof;
- c) loading the casting mixtures into a holding container in a horizontal and vertical geometric arrangement according to a formula devised for a particular pattern;
- d) transferring the loaded mixtures from the holding container to the mold, and;
- e) consolidating the mixtures in the mold into a physically uniform mass and allowing the mass to set.

It is a further object to provide a method for casting multicolored cement based materials and controlling the patterning thereof, comprising:

- a) preparing a mold to receive wet cements
5 based materials;
- b) preparing at least two wet cement based casting mixtures having different colors;
- c) providing a holding container having a removable matrix subdividing the container into at least
10 two subchambers;
- d) loading the mixtures into the container in a geometric pattern according to the matrix and a repeatable formula devised therefor;
- e) removing the matrix from the container and
15 attaching a baffled pouring aperture to the container, and;
- f) transferring the mixtures from the container to the mold through the pouring aperture whereby the baffled pouring aperture causes the mixtures
20 to flow and combine in a predictable manner.

And it is a still further object of this invention to provide a method for producing reproducible colored and patterned cement based castings which simulate natural stone, comprising;

- a) preparing two or more different colored
25 wet cement based mixtures at a viscosity whereby the mixtures are pourable but resist combining when placed against each other;

b) loading the mixtures in a pouring container at geometrically determined positions both vertically and horizontally within the container and in specific amounts according to a formula corresponding to a particular pattern to be produced thereby forming a geometrically loaded bulk mix;

c) transferring the geometrically loaded bulk mix from the pouring container into a prepared form, and;

d) allowing the mixtures to set.

Further objects and advantages will become evident from the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is an exploded, composite view of a simple holding container and matrix combination used in the method of the present invention.

Fig. 2 is an alternative embodiment of the holding container and matrix combination used in the method of the invention.

Fig. 3 is a further alternative embodiment of the holding container and matrix combination used in the method of the invention.

Fig. 4, is an exploded, composite view of a geometrically loaded holding container and baffled pouring chamber used in the method of the invention.

Fig. 5 is an alternative embodiment of the baffled pouring chamber used in the method of the

invention.

Fig. 6 is an illustration of the method of pouring the geometrically loaded mixtures using the holding container and the baffled pouring chamber of Fig. 4.

Fig. 7 is a bladder type holding container and matrix combination used in an alternative embodiment of the invention.

Fig. 8 is an illustration of the method of extruding the geometrically loaded mixtures using the bladder type container of Fig. 7.

Fig. 9 is an alternative piston extrusion container and matrix combination used in the present invention.

Fig. 10 is an illustration of the piston extrusion container of Fig. 9 with the piston member mounted.

Fig. 11 is an illustration of the method of extruding the geometrically loaded mixtures using the piston apparatus of Fig. 10.

Fig. 12 is a representation of a system adapted to use the method of the present invention and suitable for automated on site or factory casting.

Fig. 13 is a geometric loading chamber for use in the system of Fig. 12.

Fig. 14 is a mixing chamber for use in the system of Fig. 12.

Fig. 15 is a casting table for use in the

method of the present invention.

Fig. 16 illustrates the casting table of Fig. 15 in use with the system of Fig. 12.

Fig 17, is an alternative embodiment of the
5 casting table of Fig. 15.

Fig. 18 is a thumper apparatus for use with the casting table of Fig. 15.

Fig. 19 is an overhead view of a casting table with a plurality of thumpers in place.

10 Fig. 20 is a plan view of a casting mold for use with the method of the present invention to produce a structure having a formal pattern.

Fig. 21 is a cross section of Fig. 20 taken along line I-I.

15 Fig. 22 is a cross section of a casting produced using the mold of Fig. 21.

Fig. 23 is a representation of a pouring diagram for use in the method of the present invention.

20 Fig. 24 is a representation of a pouring diagram for producing a continuous pattern across more than one casting using the method of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The method of the present invention has four
25 key elements: control over the viscosity of the mixes, geometric loading of the mixes into a holding container, pouring or transferring the loaded mixes from the holding

container to a mold, and consolidating the poured mixes. Together, these four elements combine to provide a level of control over the creation and replication of patterns in cast materials which was heretofore unavailable. In
5 addition, a tremendous range of patterns is possible by modification of these elements, such modifications being recordable and the resulting patterns then being reproducible, as will become evident from the following description.

10 The method begins with the preparation of the original mixes of the casting materials as well as the preparation of the mold, mold liners and mold releases. It is preferable to premix all of the dry ingredients prior to casting as this reduces the mixing time. The
15 materials have limited working times before they begin to set. Although setting times for casting materials may be controlled by means known in the art (i.e. chemicals, temperature control, etc.) these may not always be practical or desirable.

20 All patterns produced using the method require the use of at least two different mixes which vary primarily in the amount and shade of the coloring agent used. The manipulation and control of the contrast between the different colors is important to the
25 aesthetic effect of the pattern. In addition, the mixes may differ in the fineness of their aggregates, their viscosity and additives. The size, or fineness, of the aggregate is an integral factor in the fineness, or

detail, of the finished pattern. Accordingly, a smooth and detailed pattern will generally require the finest aggregate possible in order to obtain the finest finished pattern and surface. In actual practice, aggregate size
5 is a variable which is taken into consideration and specified in formulas for particular patterns and may be as fine as fine sand or as course as the gravel commonly used in concrete. Similarly, although ordinarily all of the mixes used in any particular casting have the same or
10 similar viscosity in order to ensure proper control over the degree of blending and the separation of colors, the viscosity of the mixes may be varied among mixes used in the same casting and within reasonable limits to generate certain effects. For example, a higher viscosity mix
15 surrounded by lower viscosity mixes will produce a pattern resembling a rough vein running through a background of finer detail.

In practice, for most applications, a dry mixture of Portland cement and fine sand in a 1:3 ratio
20 is preferred. To this mixture are added various powdered, light-proof and alkali resistant mineral oxides to obtain the particular color palette desired. Since the viscosity of the wet mixes used in casting is directly related to the amount of water added to the dry
25 ingredients, those dry ingredients may be prepared in fixed quantities, packaged and stored until needed with the particular amount of water to be added indicated on the packages. The relative amounts of dry ingredients

and water to be mixed for particular viscosities and setting times are readily obtainable from standard charts and texts in the cement industry.

Molds to be used should also be prepared in advance of the mixing of the casting materials. In this regard, molds may be made according to standards common in the industry. However, the molding surface is critical to the appearance of the finished product. Thus, for a fine finish, it is preferred that the mold have a smooth surface such as may be obtained by constructing the mold from polished metal, plastic, or the like. A commercially available mold release applied in a thin layer to the inner surface of the mold provides for easy release of the cast article as well as assisting in achieving a smooth surface thereon. Alternatively, mold surfaces may be textured so as to produce a desired three-dimensional design on the finished product.

Although the control of viscosity in cementitious materials is well known in the general art, it is considered one of the important aspects of the present method. The lower the viscosity of the wet casting materials, the finer the potential pattern will be, whereas the greater the viscosity, the more integrity the individual wet mixtures will have with respect to each other and the coarser the resulting pattern will be. It is noted that the uses of "coarse" and "fine" here do not denote a qualitative difference, rather they relate to the relative difference in the micro scale of the

pattern itself, either of which could be equally desirable.

In practice the control of viscosity is a balancing act between the need for low viscosity for ease of placement into molds and low water content to achieve high structural strengths. In the present invention, while strength is obviously a desirable attribute, it is secondary to the achievement of controlled patterning. Structural strength can be given by other means to pieces produced by the method herein such as lamination to a support or backfilling with a reinforced concrete. Here, the control of viscosity serves to control the degree of interaction between the different mixes used. Typically, the lower the viscosity, the greater the interaction and the finer, more detailed and linear the resulting pattern. Conversely, the higher the viscosity, the less interaction there is between the mixes resulting in a pattern which is coarser, less detailed and clumpier or rounder.

Thus, the control of the viscosity of the mixes is important to the present invention. It also affects the mechanical apparatus and means used at different steps in the method since higher viscosities are more difficult to pour and require significantly greater shock waves to consolidate and bond the mixes. In contrast, too low a viscosity will permit the mixes to run together and the differentiation between them in the final product becomes indistinct and formless. Thus, although no

special means are proposed for controlling the viscosity of the mixes, it is an essential component of the method which contributes to the overall ability to create, control and replicate patterns in cast materials.

5 It is within the scope of this invention to prepare the dry ingredients in pre-mixed sets keyed to a particular pattern so that water may be added in carefully predetermined amounts to achieve the desired viscosity for that pattern. Such sets of pre-mixed dry
10 ingredients may include powdered super plasticizers and defoamers as well as other additives known for use in cement. Sets of pre-mixed dry ingredients are preferably packaged separately or in kits and may include apparatus and instructions for producing a particular article
15 and/or pattern in a casting. For example, a kit for making a cast slab having a particular three color marbled pattern may comprise a set of pre-mixed dry ingredients providing a base color and two vein colors, mixing instructions, a loading formula preferably
20 expressed as a chart or table as described later herein, and a holding container and matrix combination. The instructions also preferably include a mold description, if the mold is not provided as part of the kit, and pouring criteria specific to the particular design to be
25 produced. As with the loading formula, pouring criteria are described later.

Following preparation, the wet mixes are geometrically loaded into a holding container according

to a horizontal and vertical arrangement and in amounts which are pre-established according to a formula or recipe designed to achieve a particular pattern in the final cast article. Prior to the development of

5 geometric loading in this method, the "marble cake" method in which accent colors were added on top of a base color and stirred or "swirled" in with a tool, as in Price, was the principal method of obtaining patterned cast materials. Clearly, whether the stirring is done

10 manually or by mechanical means, this prior method introduces a degree of randomness which makes it difficult, if not impossible, to control the nature of the pattern and to achieve any level of pattern repetition from one casting to the next. In contrast,

15 the geometric loading of the present method is, in essence, a controlled partial blending of the different mixes to produce an aesthetic pattern without the randomness factor introduced by stirring.

Geometric loading of the casting mixes, as

20 practiced herein, is a method comprising placing specified amounts of each mix in a particular three-dimensional array within the holding container. The result is the creation of a single bulk mix composed of discrete three-dimensional islands of different colors at

25 particular horizontal and vertical positions within the container. When poured or otherwise transferred in bulk from the holding container to the mold, the three-dimensional array behaves in a manner consistent with the

principles of the flow of fluids to produce patterns which are substantially the same for each preparation and pouring of the same loading formula.

In creating a geometrically loaded bulk mix, it is understood that there are many parameters which can be modulated to create different loadings and, thereby, different patterns in the finished product. These parameters include the number of different colors, the quantity of each color in relation to the others, the sequence of loading, the quantity of each island as it is loaded, the total number of islands and the location of each island within the holding container both horizontally and vertically. All of these parameters can be expressed as part of a predetermined formula or recipe for a given pattern which can be followed to produce castings with patterns which are consistently the same from one casting to the next.

Geometric loading of the casting mixes is assisted by the provision of a matrix within the holding container which subdivides the container in a manner consistent with the particular formula. Figure 1 illustrates a simple form of such a matrix 1 placeable in the holding container 2 to provide a subdivided container 3 having nine subchambers in a 3x3 arrangement. The matrix 1 is removable from the container 2 so as not to interfere with pouring and to facilitate cleaning. Although shown in Fig. 1 as both being substantially rectangular, the matrix 1 and the container 2 may be

provided in different shapes as shown in Figs. 2 and 3. Thus, in Fig. 2, the container 2' is round while the matrix 1 is substantially rectangular, whereas in Fig. 3, the matrix 1' is shown as a collection of tubes arranged
5 vertically within the container 2'. Preferably each subdivision created by the matrix is numbered or otherwise distinguished and keyed to the formula for the particular design to be created. As shown herein, the formula is preferably expressed as a table corresponding
10 to the particular matrix.

In use, the matrix 1 is placed inside the container 2 and the prepared wet mixes are loaded into the subdivisions in amounts and locations as specified by the particular pattern formula which is keyed to the
15 arrangement of the matrix. Each subdivision may be loaded with a single color or with combinations of colors as the design requires. Table 1 is an example of a formula for a simple two color pattern.

TABLE 1

CHAMBER	LOADING
1	3 Pints White
2	3 Pints Tan
3	3 Pints White
4	3 Pints Tan
5	3 Pints White
6	3 Pints Tan
7	3 Pints White
8	3 Pints Tan
9	3 Pints White

More complex patterns are obtainable using the method with more complex loading formulas. For example, the formula of Table 2, or even the asymmetrical formula of Table 3.

TABLE 2

CHAMBER	LOADING
1	1 Cup Tan, $\frac{1}{2}$ Cup Black, 1 Cup Tan, $\frac{1}{2}$ Cup Black, 1 Cup Tan, $\frac{1}{2}$ Cup Black, 1 Cup Tan, $\frac{1}{2}$ Cup Black
2	3 Pints White
3	$\frac{1}{2}$ Cup Red, $\frac{1}{2}$ Cup Yellow, $\frac{1}{2}$ Cup Red, $\frac{1}{2}$ Cup Yellow, $\frac{1}{2}$ Cup Red, $\frac{1}{2}$ Cup Yellow, $\frac{1}{2}$ Cup Red, $\frac{1}{2}$ Cup Yellow, $\frac{1}{2}$ Cup Red, $\frac{1}{2}$ Cup Yellow
4	3 Pints White
5	$\frac{1}{2}$ Cup Black, 1 Cup Tan, $\frac{1}{2}$ Cup Black, 1 Cup Tan, $\frac{1}{2}$ Cup Black, 1 Cup Tan, $\frac{1}{2}$ Cup Black, 1 Cup Tan
6	3 Pints White
7	$\frac{1}{2}$ Cup Yellow, $\frac{1}{2}$ Cup Red, $\frac{1}{2}$ Cup Yellow, $\frac{1}{2}$ Cup Red, $\frac{1}{2}$ Cup Yellow, $\frac{1}{2}$ Cup Red, $\frac{1}{2}$ Cup Yellow, $\frac{1}{2}$ Cup Red, $\frac{1}{2}$ Cup Yellow, $\frac{1}{2}$ Cup Red
8	3 Pints White
9	1 Cup Tan, $\frac{1}{2}$ Cup Black, 1 Cup Tan, $\frac{1}{2}$ Cup Black, 1 Cup Tan, $\frac{1}{2}$ Cup Black, 1 Cup Tan, $\frac{1}{2}$ Cup Black

TABLE 3

CHAMBER	LOADING
1	3 Pints Tan
2	3 Pints White
3	1½ Pints White, ½ Pints Red
4	3 Pints Black
5	1 Pint Red, 2 Pints White
6	3 Pints White
7	3 Pints Yellow
8	1½ Pints Black, 1 Pint Yellow, 1 Cup Red
9	1 Pint White, 2 Pints Tan

The design of the pattern in the casting is, therefore, originally the three dimensional arrangement of the individual colors in the holding container which is then transformed into a two dimensional surface design as well as a three dimensional design through the casting.

Preferably, the order of loading is the order in which the colors are listed for each chamber. Thus, the underlying concept of geometric loading is to create a specific three dimensional geometry in the holding container which, when poured from the container into the mold, results in a particular pattern corresponding to the loading geometry and the manner of pouring. Clearly then, the pour into the mold is a history of the order in which the holding container is loaded. Thus, if the subchambers are loaded in a regular array of alternating colors, such as in Table 1, the pattern produced will tend to be regular and linear from the beginning of the pour to the end. Alternatively, if the subchambers are

loaded differently at the bottom than at the top, such as in Tables 2 or 3, the colors and pattern produced in the mold will be different at the end of the pour than at the beginning and will vary throughout the pour. Similarly,
5 if loading is identical at the bottom and top with a variation midway through, that variation will show up in the mold midway through the pour.

After loading, the matrix is carefully removed so as not to disturb the three-dimensional array. In
10 view of the preferred viscosity of the mixes being such as to retain the separate integrity of each color, removal of the matrix does not cause any mixing of the individual colors. In fact, if left to set in the holding container, the resulting block could be cut in
15 cross section to reveal the discrete areas of individual colors in their geometrically loaded array.

After the container is loaded, the bulk mix is then poured or otherwise transferred to the mold. The act of pouring the loaded bulk mix into the mold provides
20 another level of control over the resulting pattern which can also be specified by the formula for a particular pattern. It has been found that, by following the same pouring criteria for successive loadings of any one particular formula, the level of control is such that
25 patterns produced in the cast articles are substantially consistent from one loading to the next. Thus, the present method makes it possible to create a series of cast articles having substantially identical patterns

which resemble natural materials, such as marble, granite, or the like. Control is exercised through the following pouring criteria which are also adaptable to other transfer methods, such as extrusion: the design of
5 the pour, the angle of the pour, the modulation of the pour and the edge geometry of the container.

The design of the pour refers to the design in which the bulk mix is laid down in the mold. Typically, the mold has a generally flat bottom, or face, and the
10 bulk mix is poured in parallel rows or stripes until the bottom is covered. The pour design may be expressed as a diagram which is included with the chart for a particular formula. Figure 23 illustrates a typical pour design diagram in which the mold 16 is designated and the design
15 of the pour is indicated by lines A-F across the surface of the mold 16. The direction of the arrow indicates the direction the pour is to follow. In addition to indicating the pour diagram for a single formula, each of the lines may be keyed to separate formulas. For
20 example, in the diagram of Fig. 23, lines A, B and C may be for a loading corresponding to the formula of Table 1, while lines D, E and F are for a loading corresponding to the formula of Table 3. The row or stripe design tends to result in the most naturalistic appearance to the
25 final product. However, other designs, such as arcs, undulations, or even concentric circles may be used. Each design will result in a different but consistent pattern for a given geometrical loading of the container.

The angle of the pour refers to the angle formed between the direction of the container and the direction of the pour. This aspect of pouring is considered to comprise three basic operations. When the opening of the container faces the direction of the pour, the mix breaks over the edge as it pours creating a mottled pattern as the surface of the mix opens up to reveal the arrangement underneath. When the opening of the container is tangential to the direction of the pour, the mix pulls together forming thinner, more linear patterns. And, when the opening of the container faces in the direction opposite to the direction of the pour, there is little change in the relationship of the individual colors as they exit the container and are laid down in the mold.

Modulation of the pour depends, in part, on the viscosity of the mix. A higher viscosity will usually require a greater modulation, or vibration, of the container to cause it to flow smoothly. However, regardless of the viscosity of the mix, as the level of vibration is increased, the flow becomes more uneven. Thus, if the vessel is continually moved during the pour, the flow of mix transfers to the mold as a repetitive modulation of the width of the row or stripe. If the vibration is amplified further, the mix no longer flows in a continuous manner but rather drops in drips or clumps into the mold. Depending on the relative speed of the pour across the mold surface, this will create either

discrete or overlapping pattern elements.

The edge geometry over which the mix is poured affects the pattern creation in one of two ways. First, it will either transfer the loaded geometry of the mix
5 directly to the mold, if the edge is flat and as wide as the container, or it will cause the geometry to stretch and elongate if the edge is narrower than the container. Thus, where the holding container has a square cross section, a pour along an edge will produce a different
10 pattern than a pour through a corner. The second edge geometry effect is dependent upon whether there is a lip at the edge. A lip along the pouring edge will create more of a breaking in the stream of the pour as discussed above in regard to the angle of the pour.

15 The edge geometry of the container may be changed by attachment of a pouring chamber having a different size, shape, edge structure or the like. In addition, the pouring chamber may include baffles forming a specific path through which the mix must flow. Fig. 4
20 illustrates container 2 in which wet mixes have been loaded and from which the matrix has been removed leaving the geometrically loaded bulk mix 6. Attachable to the container 2 is a hollow pouring chamber 4 having a series of baffles 5. In this embodiment, the baffles consist of
25 a pair of plates 7 extending substantially half way across the width of the pouring chamber and having apertures 8 which form a pathway for the bulk mix 6 to flow through. Fig. 5 illustrates a pouring chamber 4

with an alternative baffle 5' consisting of a single plate 7' on angle and having a plurality of apertures 8' therein. The pouring chamber of Fig. 5 also illustrates the alternative edge geometry of a corner 9 rather than a long edge 10 of the pouring chamber 4.

Fig. 6 illustrates a pour using the container and pouring chamber combination of Fig. 4. In this embodiment, the geometrically loaded bulk mix 6 tries to flow in a flat, wide ribbon and to exit the container 2 with the individual mixes in the order and arrangement in which they were loaded. However, by placing pouring chamber 4 with baffle 5 over the container opening, the flow is first divided to pass through the first baffle with two apertures and then recombines to flow through the second baffle having only a single aperture. The flow characteristics of the particular mix through such a baffle can be calculated according to the known flow characteristics of fluids of a particular viscosity using the principles of fluid mechanics whereby the effect of the baffle on the geometric arrangement of the mix and, thus, on the pattern of the casting can be reasonably predicted.

The criteria for a specific pattern can be expressed as an algorithm consisting of a) the formulas for the specific color mixes, including their viscosity; b) the geometric loading instructions or chart; c) the pouring diagram; d) the pouring instructions including the pour angle, edge geometry and/or baffles to be used,

the modulation type or frequency, etc. All of these are mechanisms which lead to the control and reproducibility of the pattern. These mechanisms provide both range and control in the creation and replication of patterns in
5 cast materials. In addition, they provide the means to control variability within a given pattern which is particularly desirable when emulating natural stone patterns. Thus, when one looks at a set of marble tiles, for instance, they can be recognized as being from the
10 same quarry or block of marble, but it is apparent that they are not identical since natural stone patterns vary from piece to piece. These variations include shades of the particular colors; variation in patterns across one or several pieces; angle; thickness; and/or direction of
15 veining; etc. By recording minor variations in the elements of the algorithm for a particular pattern, it is possible, through the present method, to introduce this naturalistic variation into a pattern while maintaining control over both the overall pattern and the minor
20 variations of the elements which produce the naturalistic variations in the final product. Thus, the same formula or algorithm which specifies the criteria for a specific pattern, can also be used to provide the criteria for a set of patterns which vary in minor degrees corresponding
25 to naturalistic variations but have, as their base, the overall specific pattern of a particular natural material.

The same principles are applicable to the

transfer of the geometrically loaded bulk mix by extrusion, either from a holding container in the form of a flexible bladder 11 against which external pressure is applied to extrude the mix as shown in Figs. 7 and 8, or
5 from a rigid container 12 to which a driven piston assembly 13 is mounted, as shown in Figs. 9-11. In the case of the flexible bladder 11, the lower end may be provided with a nozzle 14 of a particular size or shape in which baffles may optionally be mounted and which is
10 closed during loading. Matrix 1 is used for geometrically loading the bladder 11 and is removed before the mouth of the bladder 11 is closed and secured 15. The loaded mix is then extruded from the bladder into the mold 16 by applying pressure to the outside of
15 the bladder 11 using manual or mechanical means. In a similar manner, rigid container 12 is geometrically loaded using matrix 1 as a guide. Matrix 1 is removed, a nozzle 17 is mounted to the lower end of container 12 and a piston and drive assembly 13 is mounted to the upper
20 end. The piston applies internal pressure to extrude the geometrically loaded mix through the nozzle 17 into mold 16. In this apparatus, nozzle 17 may be interchangeable and provided in different sizes and shapes. The piston may be driven by pneumatic, hydraulic or mechanical
25 means. As an alternative, air pressure may be applied directly to the bulk mix to extrude it instead of a piston. In these instances, the order of extrusion of the loaded mix will be the same as the order in which the

individual mixes are loaded into the containers.

With the appropriate equipment, the method of this invention may be applied to automated equipment which may be utilized either in factory production or to large scale, on-site, construction projects. Fig. 12 illustrates one set of equipment whereby this may be accomplished. In such an embodiment, the different mixes are prepared in mobile mixing machines 18 which have grout pumps 19 connected to a geometric loading chamber 20 by hoses 21. The geometric loading chamber 20 is equivalent to the holding container and matrix of the basic system and is illustrated in more detail in Fig. 13. In the geometric loading chamber 20, the hoses 21 from the grout pumps 19 feed into the chamber 20 in a matrix configuration 22 through a piping and valving system 23 which may be manually or automatically controlled to vary the configurations of the incoming mixes and to control their flow rates. Such a system is essentially a mechanical matrix and is necessary to achieve the proper mixing ratios and three dimensional array for the particular pattern formula.

Connected to the geometric loading chamber 20 is a mixing chamber 24 which is equivalent to the pouring chamber 4 and baffles 5. Under pressure from the pumps 19, the mixes flow from the geometric loading chamber 20 into the mixing chamber 24 for blending by active or passive baffles 25 and thence into the casting head 26. Active baffles are baffles which may have their relative

position in the flow mixture changed by manual or automatic actuating means to change the degree and type of blending of the bulk mixture according to the pattern formula. Passive baffles are fixed such as the baffles 5 in the pouring chamber 4.

The casting head 26 controls the manner in which the bulk mix leaves the apparatus and is transferred to the mold 16. By changing the casting head 26, it is possible to obtain transfer conditions equivalent to pouring, extruding or spraying. Thus, for pouring, the casting head 26 has an opening equal to or larger than the volume of the mixture itself which allows the partially blended mixture to pour out of the casting head 26 into the mold 16. As discussed previously, the pour may be controlled by means of the design and angle of the pour as well as the use of vibration to modulate the pour and by changes in the edge geometry of the casting head opening.

For extruding, the casting head 26 has an opening which is smaller than the volume of the mixture which causes the mixture to emerge as a bead with the different colors as substantially linearly arranged pattern elements. As with the simpler extrusion apparatus discussed previously, changeable nozzles may be provided to vary the size and/or shape of the extruded bead.

For spraying, the casting head 26 is coupled to a source of compressed air which is blown into the

casting head and through the mixture or it may be directed to blow into the mixture as it is extruded from the casting head. The air flow breaks up the mixture as it flows out of the casting head into droplets or globs of sizes which are dependent upon the viscosity of the mixture and the velocity and pressure of the air flow. Alternative methods of achieving a division of the mixture may be used, including devices such as a variable speed mechanical chopper at the casting head outlet.

10 The apparatus comprised of the loading chamber 20, mixing chamber 24 and casting head 26, is preferably mounted so as to be easily manipulated in any axis and in a manner to traverse a large mold during mix transfer. For this purpose, the apparatus may be suspended, as shown in Figs. 12 and 16, or mounted to a movable and independently positionable apparatus such as a mobile, hydraulically actuated boom or a track mounted, multi-axis, aiming and traverse mechanism such as a robotic arm.

20 After the mix has been transferred to the mold, it must be consolidated. It is common practice in the pouring of cement or concrete to apply vibration to settle the poured mixture and eliminate air bubbles. The vibration commonly used, however, is high frequency, low amplitude vibration applied directly to the poured mix by
25 insertion of a vibrating tool. In the present invention, such vibration is detrimental to the development of the pattern. Accordingly, consolidation is accomplished

principally by causing low frequency shock waves to vertically traverse the poured mixture within the mold. Initially, several major shocks are applied to the underside of the mold to cause a general consolidation of the mixture followed by minor shocks at specific sites as needed to achieve a uniform surface.

In practice, the requisite shock may be produced by dropping or banging the mold followed by repeated strikes on the underside in specific locations and with hammers of varying weights. Mechanical means may also be employed but should be limited to avoid excessive liquefaction of the mix which may disturb the desired pattern. Figures 15-19 illustrate apparatus which facilitates the application of shock waves to the poured mixtures.

In Figs. 15 and 16, the basic apparatus of a mold support assembly 27 is illustrated. The assembly 27 comprises the mold 16 and support frames 28. Mold 16 has locating pins 29 depending from the underside which register with resilient support members 30 on the support frame 28. The support frames 28 and the resilient support members 30 raise the mold 16 a sufficient distance to permit the underside of the mold 16 to be struck.

Striking of the mold 16 to apply shock may be accomplished manually or by mechanical means. Fig. 17 illustrates an alternative embodiment of the mold support assembly 27 which is provided with pneumatic hammers 31

positioned beneath the mold 16 to apply selected shocks. An alternative apparatus is illustrated in Fig. 18 and comprises a mechanical thumper 32 which may be operated by a standard jackhammer 36. The thumper 32 comprises a support 33, which may be moveable or fixed to the support frame 28, a pivot arm 34 and a transfer arm 35. Pivot arm 34 is a rigid right angle piece having a first pivot hinge 37 at the angle and a second pivot hinge 38 at the end of one arm. The end of the other arm is provided with a knob or head 39 which strikes the underside of the mold 16. The first pivot hinge 37 connects the pivot arm 34 to the top of the support 33 in a freely pivotable manner. The transfer arm 35 connects to the second pivot hinge 38 and extends out from under the mold 16 to connect to the tool end of the jackhammer 36. In this manner, the reciprocating action of the jackhammer 36 is transferred to the pivot arm 34 and causes the pivot arm 34 to rock about the first pivot hinge 37 so that the head 39 strikes the underside of the mold 16 sending the shock primarily vertically through the poured mix. As with the pneumatic hammers 31, a plurality of thumpers 32 may be positioned under the mold 16, as shown in Fig. 19, with transfer arms exposed for simultaneous or alternating operation.

The process of consolidation levels the surface of the poured mix without having to trowel or draw a leveling tool across the top of the mold which would adversely affect the pattern on that surface of the

casting. Consolidation also serves to bond the chemical and physical components of the poured mix into a structural whole. In addition, consolidation using shock waves, as opposed to the more common high frequency
5 inserted vibrators or vibrating tables, has been found to produce a fractalization, or interweaving, in the pattern which tends to follow the naturalistic lines seen in fractal geometry.

It is important to understand that the uses of
10 vibration here are very different from those traditionally used in the cement/concrete industries. This difference is both in type and purpose. Traditionally, cement or concrete, when poured, is spread out mechanically or by hand and is then struck off by a
15 tool drawn across the poured mass to produce a flat surface. It may then be settled and any air driven out by means of high frequency vibration applied by an implement inserted into the poured mix. This type of vibration spreads out in a horizontal pattern and results
20 in a greater liquefaction of the poured mix. In the present method, that degree of liquefaction results in less definition in the pattern whereas the mechanical spreading normally employed adversely affects the pattern and effectively negates the control obtained through the
25 geometric loading. Therefor, the present method employs low frequency vibration applied as shocks to the under side of the mold to settle and level the pour. Since the mix after pouring is generally uneven it requires uneven

vibration to settle the pour into a flat piece.

Accordingly, the first, or primary, shocks are applied beneath the highest areas of the pour causing them to settle downward and to flatten and fill any adjacent

5 voids. Linear patterns tend to stretch out and join, thereby producing the impression of continuous veins.

Secondary shocks of less strength are applied as needed at selected areas to even out the surface without having to strike across the surface of the pour.

10 After setting, the casting is removed from the mold and may be finished by any of the common methods of cleaning, polishing and sealing known in the art. For example, cleaning may be accomplished with soaps or a solution of muriatic acid followed by an ammonia wash.

15 Polishing may employ the same equipment and methods used in stone working. However, it is important to remember that polishing actually cuts into and removes a portion of the cast material and may affect the pattern.

Generally, however, careful light polishing has been
20 found to remove any surface unevenness which may result from bleeding and tends to sharpen the pattern making it more distinct.

Sealing can also be accomplished with commercially available materials and is important for the
25 protection and enhancement of the pattern. In the case of protection, cementitious materials are porous and will absorb water and stain. Sealing the surfaces of a casting prevents any absorbtion and staining which would

interfere with the pattern.

The different methods of transferring the loaded mix to the mold, ie., pouring, extruding or spraying, tend to create patterns resembling particular
5 natural materials. Thus, the patterns produced by pouring tend to resemble marble, those produced by extruding tend to resemble sandstones and travertines, while the method of spraying a geometrically loaded mix creates patterns resembling granite. Although these
10 methods of transfer tend to create patterns resembling these various types of stone, it will be evident that the user has the ability to deviate significantly in both color and range of pattern from those actually found in nature. On the one hand, colors and control of the
15 pattern can create patterns deceptively similar to natural stone products whereas, on the other hand, patterns can be created which will clearly be man-made.

The following examples illustrate the method as applied to these particular transfer methods using the
20 formula of Table 1.

EXAMPLE 1

A mold of suitable size and material is prepared with an appropriate mold release. Dry mixes corresponding to the colors in Table 1 are prepared and
25 water is added to produce the wet mixes of the desired viscosity. Using the apparatus of Fig. 1, with the subchambers numbered left to right and top to bottom, the holding container 2 is loaded according to the formula.

The matrix 1 is removed and the loaded mix is poured into the mold in a series of parallel rows. The process of pouring and the edge geometry of the container combine to blend the loaded colors in a manner which resembles a
5 broad veined marble. If narrower veining is desired, a pouring chamber and baffle combination is mounted on the container prior to pouring. The effect of the baffles is to create finer detailing by causing the mix to flow around and through the obstacles posed by the baffles
10 resulting in a greater blending of the colors and a narrower flow. Appropriate shock is applied to the mold in the manner disclosed to settle and consolidate the mix.

EXAMPLE 2

15 A mold and mixes are prepared as in Example 1. An extruding apparatus, as in Figs. 9 and 10 is provided with a nine chambered matrix 1 and the container 12 is loaded according to the formula. The matrix 1 is removed, the piston and drive assembly 13 is mounted and
20 the nozzle 17 is opened. Upon activation of the piston, the loaded mix is extruded through the nozzle 17 forming a large bead. The islands in the geometrically loaded mix become very narrow, linearly patterned colored elements as they are forced through the nozzle 17 into
25 the mold 16. To simulate the appearance of sandstone or travertine stone, the bead is extruded in slightly uneven rows. Shocks are applied to the mold to settle and consolidate the mix which is then allowed to set.

Different effects on the linearity of the pattern can be obtained by changes in the shape and size of the nozzle and by means of the pouring criteria as previously discussed.

5 EXAMPLE 3

 In this example an extruding apparatus as in Example 2 is prepared and an air hose leading from a compressed air source to an exit immediately adjacent to the extruder nozzle 17 is mounted thereto. The
10 geometrically loaded mix is extruded from the nozzle into the air flow and is broken up into multicolored drops or globs which are deposited in the mold. Consolidation of the globs in the mold produces a pattern in the casting which resembles the mottled appearance of granite. It is
15 understood that the particle size of the globs and, thereby, the apparent size of granite-like mottling can be controlled by varying the relationship between the size and shape of the nozzle and the air pressure and flow rate.

20 It will be readily apparent to any one versed in the art that there can be other variations made to the method which fall within the scope of the invention. For example, the size and shape of the holding container can vary as can the size, shape and number of divisions in
25 the matrix. Most importantly, the formula for geometrically loading the container is infinitely variable in terms of colors, arrangement and amounts. However, once a formula for a particular pattern has been

devised, the present method provides a means whereby that pattern can be recorded and reproduced by following the formula and the particular pouring criteria therefor.

The present method is also adaptable to produce
5 pieces having the appearance of marble or other natural or artificial patterns, but with a pattern which continues from piece to piece as if it were cut from a single block of stone. To create this effect of continuous patterning, a pouring diagram, similar to that
10 discussed previously, is created by making scale drawings of the shape of the pieces to be cast, showing them in their adjacent positions. Figure 24 illustrates such a diagram in which pour lines A-F are drawn across the borders between representations of a plurality of molds
15 16a, 16b and 16c, the lines may indicate the pour design as in Fig. 23, or they may correspond to an arrangement of veins in the pattern to be cast. In complex patterns it is recommended that each vein be labeled with its particular geometric loading formula and pouring
20 criteria. After the diagram is completed, the edges of the molds are marked with entry and exit points for each vein, matching them with the diagram and with the mold edges of each contiguous piece to be cast. In an automated production environment this process can be
25 facilitated by using a grid system marked on the mold edges. After the mold edges are properly delineated, the molds are filled in a manner as hereinbefore described, with the exception that each sequential pour must follow

its predetermined path according to the pouring diagram. The finished castings, when removed from their molds, are erected in their properly adjacent positions to present a continuous pattern across the several pieces. Using this
5 system, individual panels may be cast in any order, but when cured and removed from their molds, may then be arranged in the proper order to display the continuous pattern as originally designed. In an automated environment a computer controlled robot arm combined with
10 a casting head such as in Fig. 12, may be used for transferring the mixes to molds. In such an environment, it is within the scope of this invention to establish the pattern formula and pouring diagram criteria as part of the software program controlling the action of the arm.

15 The method of this invention can also be used to produce articles having a formal design in combination with the various patterns. In this instance a mold 40 is produced having the formal pattern as raised portions 41 on the base of the mold as indicated in Figs. 20 and 21.
20 The mold is filled with a desired geometrically loaded mix in a manner which will result in the recessed areas 42 having the desired stone-like pattern. If desired, the poured mix can be backfilled to add strength to the final article. The resulting casting is removed from the
25 mold and presents the appearance, as in Fig. 22, of a series of pieces of stone 43 on a backing 44 with gaps 45 between the pieces 43 corresponding to the raised portions 41. Gaps 45 are then filled in with a different

geometrically loaded mix, a grout, cement or other material poured or troweled in and allowed to set. In an alternative embodiment, the formal pattern may be a separately formed metal or wood lattice or the like which is placed on the base of the mold before pouring and which then becomes an integral part of the final casting.

The method of this invention may be used to produce any article which may be manufactured from castable materials, and particularly from cement and/or concrete materials. Thus, articles such as paving stones, tiles, counter tops, indoor or outdoor furniture items, structural building articles and decorative artistic and architectural elements are among the many items to which this method is applicable. In the area of architectural elements, the present method is applicable to the production of precast veneer panels for incorporation as integral portions of a precast or site-cast wall structure wherein the panels are provided on one side with means to engage and become incorporated in a poured concrete structure where the precast panel forms at least one portion of the form for the concrete.

The method of this invention is particularly adaptable to automated production environments wherein the mixing, measuring, loading and transferring of the mix is controlled according to a program entered into a computer or other machine controller which oversees the operations of mixers, dispensers, pouring chambers, extruders, passage of molds along an assembly line, and

the like, in manners consistent with both the method of this invention and with automated assembly lines. In addition, apparatus described in this disclosure may be similarly adapted to automatic or manual adjustment
5 within the scope of the present invention.

The above embodiments and drawings illustrate the preferred embodiments of the present invention and it is understood that many variations and modifications of those embodiments will be evident to those skilled in the
10 art and may be carried out without departing from the spirit and scope of the present invention.

What is claimed is:



- 1 1. A method for creating multicolor designs
2 and patterns in cast materials comprising the steps of:
3 a) preparing a mold to receive casting
4 mixtures;
5 b) preparing at least two wet casting
6 mixtures of different colors at a viscosity to facilitate
7 even pouring thereof;
8 c) loading the casting mixtures into a
9 container in a horizontal and vertical geometric
10 arrangement according to a formula devised for a
11 particular pattern;
12 d) transferring the loaded mixtures from the
13 container to the mold, and;
14 e) consolidating the mixtures in the mold
15 into a physically uniform mass and allowing the mass to
16 set.
- 1 2. The method of claim 1 wherein the
2 consolidating step comprises applying low frequency, high
3 amplitude shock waves to the mold.
- 1 3. The method of claim 2 further comprising
2 removing the set mass from the mold and finishing the
3 surface.
- 1 4. The method of claim 1 further comprising
2 providing a removable matrix in said container which
3 subdivides said container, and loading said casting
4 mixtures into said subdivided container according to a



THIS SHEET HAS BEEN
REPLACED

5 predetermined formula wherein said formula is keyed to
6 the subdivided arrangement provided by said matrix.

1 5. The method of claim 4 further comprising
2 removing said matrix after loading said container.

1 6. The method of claim 5 wherein the loaded
2 mixtures are transferred to said mold by pouring from
3 said container.

1 7. The method of claim 6 further comprising
2 providing a pouring chamber removably attachable to said
3 container and having a plurality of baffles defining a
4 path through which said loaded mixtures pass upon
5 pouring, and pouring said loaded mixtures from said
6 container through said pouring chamber into said mold,
7 whereby said geometrically loaded mixtures flow around
8 said baffles in a predictable manner to create a pattern
9 in said mold.

1 8. The method of claim 5 wherein the loaded
2 mixtures are transferred to said mold by extruding.

1 9. The method of claim 5 wherein said loaded
2 mixtures are transferred to said mold by spraying.

1 10. The method of claim 4 comprising removing
2 said matrix from said container, providing a nozzle at
3 one end of said container and a driven piston at the
4 other end of said container and driving said piston into
5 said container whereby said loaded mixtures are extruded
6 through said nozzle into said mold.

1 11. A method for casting multicolored cement
2 based materials and controlling the patterning thereof,





- 3 comprising:
- 4 a) preparing a mold to receive wet cement
5 based materials;
- 6 b) preparing at least two wet cement based
7 casting mixtures having different colors;
- 8 c) providing a container having a removable
9 matrix subdividing said container into at least two
10 subchambers;
- 11 d) loading said mixtures into said container
12 in a geometric pattern according to said matrix and a
13 repeatable formula devised therefor;
- 14 e) removing said matrix from said container
15 and attaching a baffled pouring aperture to said
16 container, and;
- 17 f) transferring said mixtures from said
18 container to said mold through said pouring aperture
19 whereby said baffled pouring aperture causes said
20 mixtures to flow and combine in a predictable manner.
- 1 12. The method of claim 11 further comprising
2 consolidating the mixtures in said mold by application of
3 low frequency, high amplitude shock waves to said mold.
- 1 13. The method of claim 12 wherein said
2 container comprises a flexible bladder from which said
3 mixtures are extruded through said aperture.
- 1 14. The method of claim 12 wherein said
2 container comprises a rigid cylinder having a piston
3 therein whereby said mixtures are extruded through said
4 aperture.



1 15. The method of claim 12 wherein said
2 container comprises a tiltable chamber with said baffled
3 pouring aperture attached at one end whereby, when said
4 matrix is removed, said chamber is tilted to pour said
5 mixtures therefrom through said baffled pouring aperture.

1 16. A method for producing reproducible
2 colored and patterned cement based castings which
3 simulate natural stone, comprising;

4 a) preparing two or more different colored
5 wet cement based mixtures at a viscosity whereby the
6 mixtures are pourable but resist combining when placed
7 against each other;

8 b) loading said mixtures in a container at
9 geometrically determined positions both vertically and
10 horizontally within said container and in specific
11 amounts according to a formula corresponding to a
12 particular pattern to be produced thereby forming a
13 geometrically loaded bulk mix;

14 c) transferring said geometrically loaded
15 bulk mix from said container into a prepared form, and;

16 d) allowing said mixtures to set.

1 17. The method of claim 16 further comprising
2 applying low frequency, high amplitude shock waves to
3 said form to consolidate said mixtures.

1 18. The method of claim 17 comprising aiding
2 the geometric placement of said mixtures in said
3 container by providing a removable matrix temporarily
4 subdividing said container into which said different





5 colored mixtures are placed according to said recipe, and
6 wherein said matrix is removed from said container after
7 placement of said mixtures and prior to transferring said
8 bulk mix into said form.

1 19. The method of claim 17 further comprising
2 providing a blending apparatus on said container and
3 transferring said bulk mix by pouring from said container
4 through said blending apparatus whereby said bulk mix is
5 partially blended during pouring and wherein said partial
6 blending is substantially predictable according to the
7 viscosity of said mixtures and fluid characteristics
8 thereof.

1 20. The method of claim 19 wherein said
2 blending apparatus comprises a pouring lip on said
3 container, said pouring lip having a fixed geometry.

1 21. The method of claim 19 wherein said
2 blending apparatus comprises a pouring nozzle attachable
3 to said container, said pouring nozzle comprising a
4 plurality of baffles defining a specific flow pathway for
5 said bulk mix.

1 22. The method of claim 16 wherein said
2 predetermined formula specifies the order, location and
3 amount of each of said concrete mixtures to be placed in
4 said container.

1 23. A simulated stone made by the method of
2 claim 17 and having a pattern resembling marble.

1 24. A simulated stone made by the method of
2 claim 17 and having a pattern resembling granite.





1 25. A simulated stone made by the method of
2 claim 17 and having a pattern resembling sandstone.

1 26. A simulated stone made by the method of
2 claim 17 and having a pattern resembling travertine.

1 27. A method for preparing multicolored mixes
2 of castable materials for placement in a mold to produce
3 a cast article having a pattern simulating natural stone,
4 the method comprising loading individual colors of
5 prepared castable materials into a container in a
6 geometric, three dimensional, horizontal and vertical
7 array according to a predetermined formula for said
8 pattern.

1 28. The method of claim 27 wherein a removable
2 matrix is provided subdividing said container into an
3 array of subchambers corresponding to said predetermined
4 formula.

1 29. The method of claim 28 further comprising
2 removing said matrix from said container after loading
3 with said castable materials.

1 30. The method of claim 29 further comprising
2 transferring said loaded, geometric, three dimensional
3 array of castable material from said container to said
4 mold in a manner calculated to produce a particular
5 pattern.

1 31. The method of claim 30 wherein the
2 castable material is transferred by pouring from said
3 container.

1 32. The method of claim 30 wherein said





2 castable material is transferred from said container by
3 extruding.

1 33. The method of claim 30 wherein said
2 castable material is transferred from said container by
3 spraying.

1 34. The method of claim 31 whereby the pattern
2 produced in the cast article simulates marble.

1 35. The method of claim 32 whereby the pattern
2 produced in the cast article resembles sandstone.

1 36. The method of claim 33 whereby the pattern
2 produced in the cast article resembles granite.

1 37. A kit for producing cast articles having a
2 pattern simulating natural stone comprising:

3 a plurality of packages of pre-measured
4 and pre-mixed, colored, dry cementitious ingredients;

5 a loading container and removable dividing
6 matrix therefor;

7 instructions for preparing individual wet
8 mixes from said dry ingredients;

9 a chart keyed to divisions of said matrix
10 and designating an order for loading said container with
11 said wet mixes to create a specific three-dimensional
12 array in said container; and

13 pouring criteria directing the manner for
14 transfer of the loaded mixes from said chamber into a
15 mold.

1 38. The kit of claim 37 further comprising a
2 combination pouring chamber and baffle removably



3 mountable to said container and providing a pouring path
4 for said loaded mixes from said container to said mold
5 whereby said three-dimensional array is converted into a
6 substantially linear pattern corresponding to a simulated
7 natural stone pattern.

1 39. The kit of claim 38 wherein said container
2 comprises a flexible bladder and said combination pouring
3 chamber and baffle comprises a nozzle mountable in said
4 bladder, whereby said loaded mixes are extruded from said
5 bladder through said nozzle in response to pressure
6 exerted against the outside of said bladder.

1 40. The kit of claim 38 wherein said container
2 comprises a rigid cylinder, said combination pouring
3 chamber and baffle comprise a nozzle structure mountable
4 on one end of said cylinder, and said kit further
5 comprises a piston assembly mountable to the other end of
6 said cylinder whereby said piston fits within said
7 cylinder and exerts a force against said loaded mixes to
8 extrude said mixes through said nozzle.



This Sheet Has Been Replaced



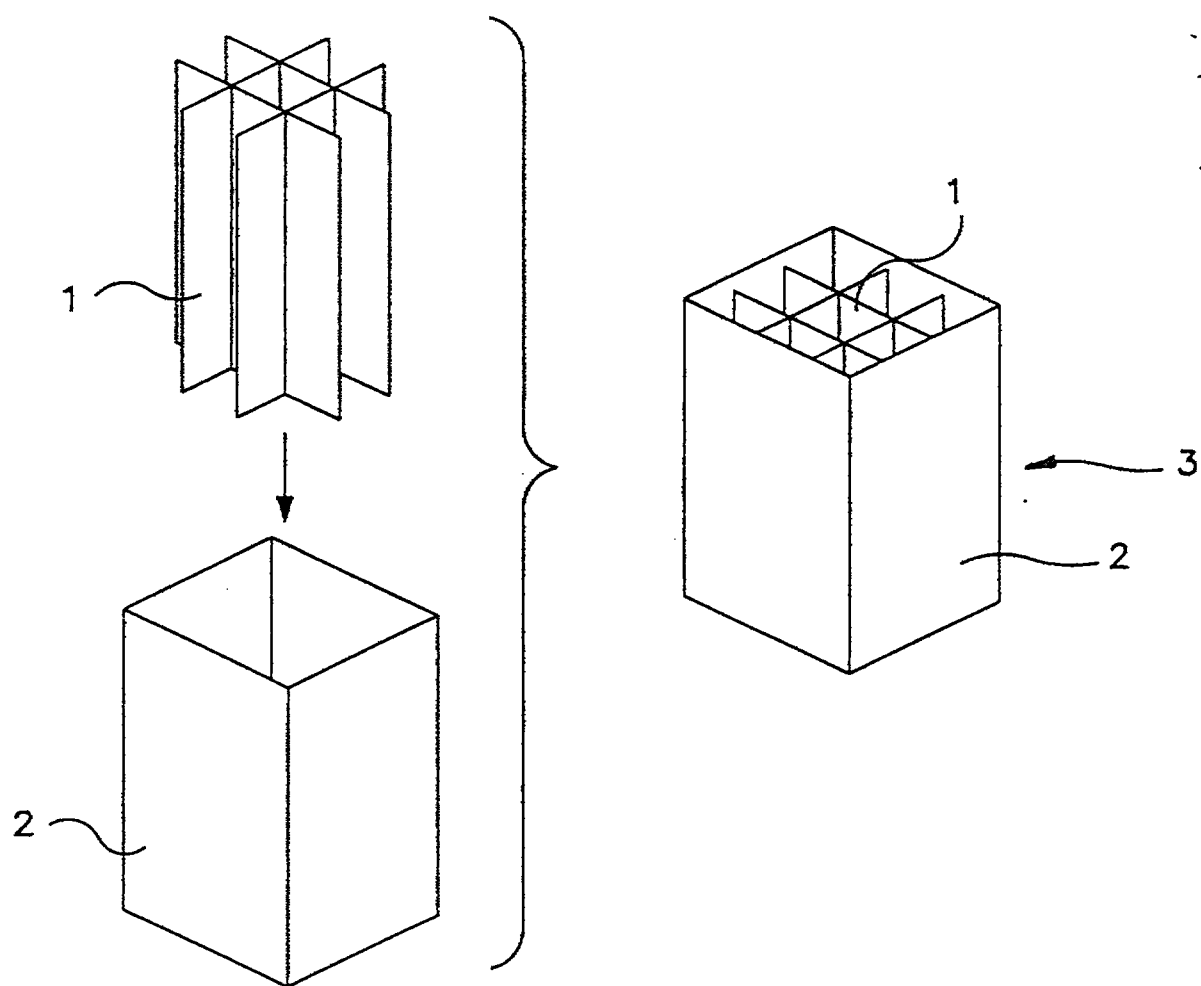


FIG. 1

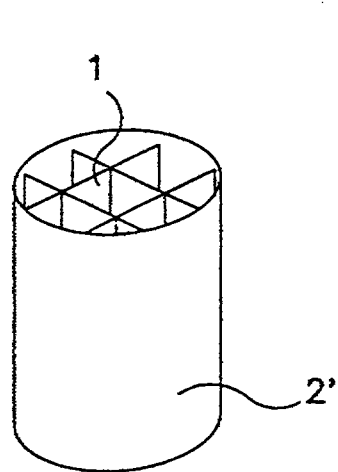


FIG. 2

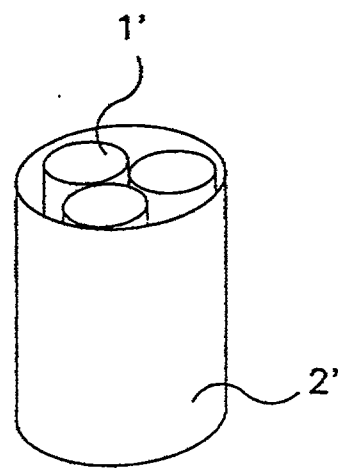


FIG. 3

2/6

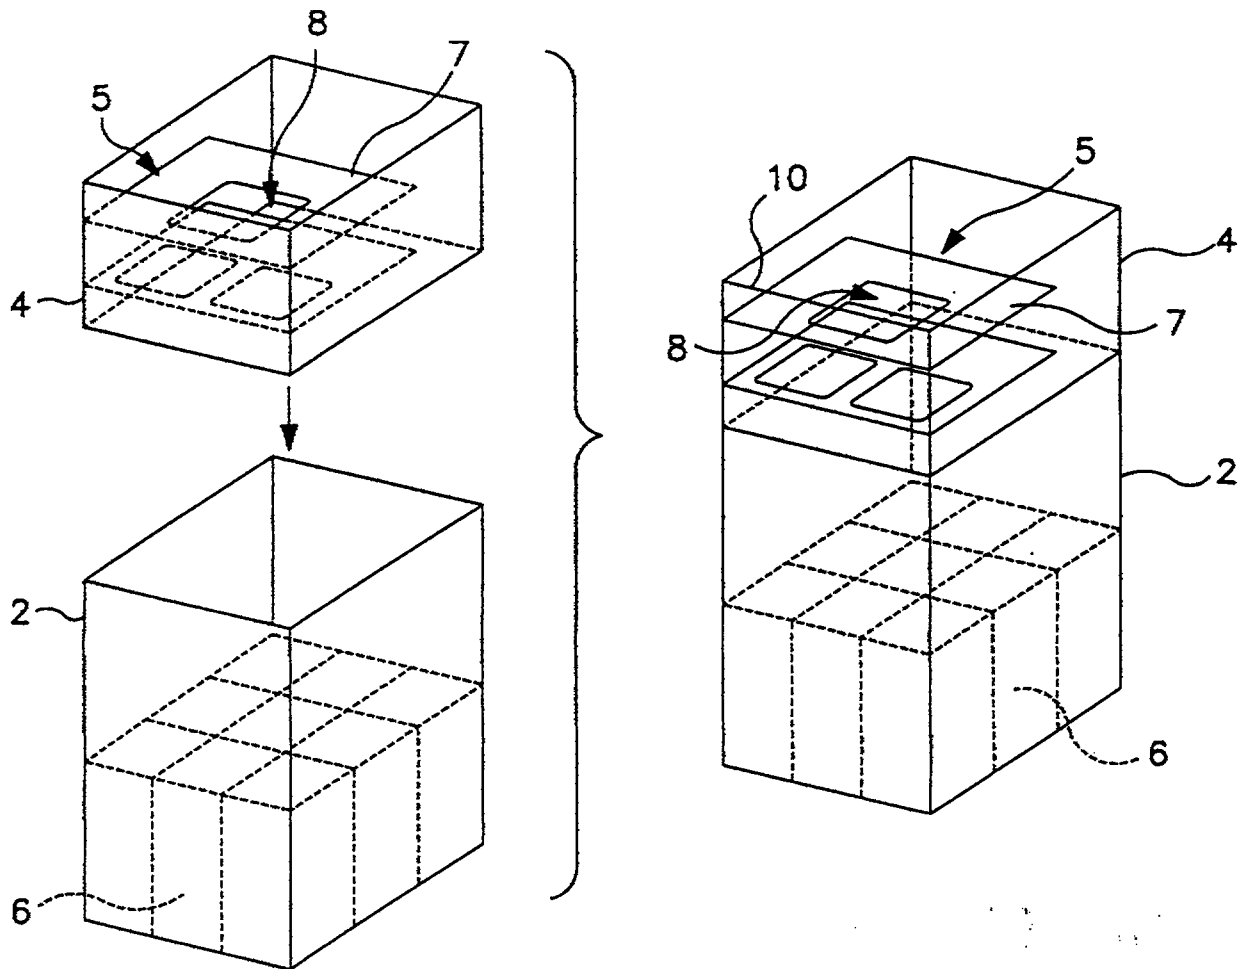


FIG. 4

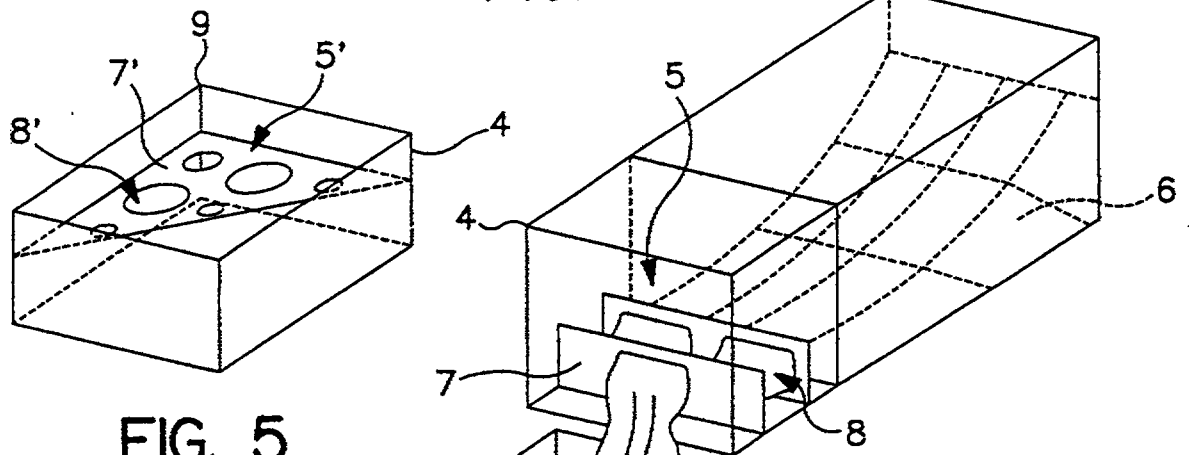


FIG. 5

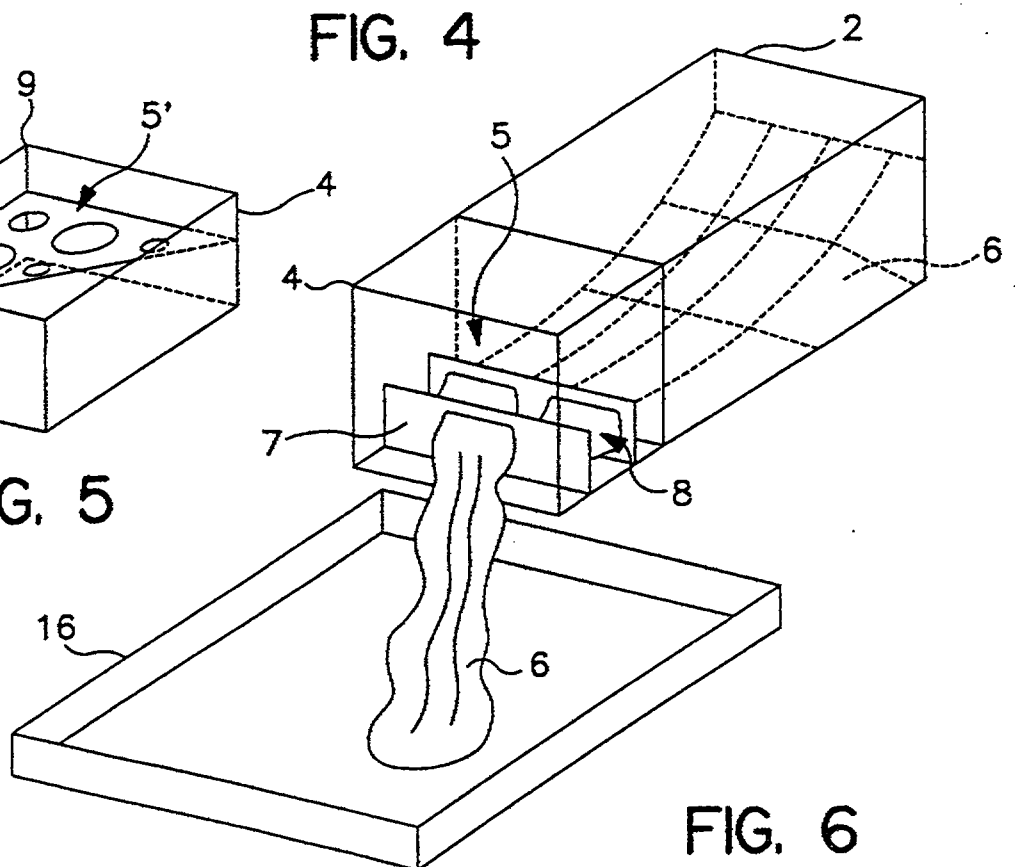


FIG. 6

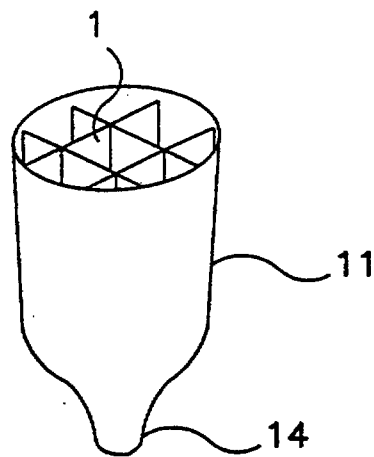


FIG. 7

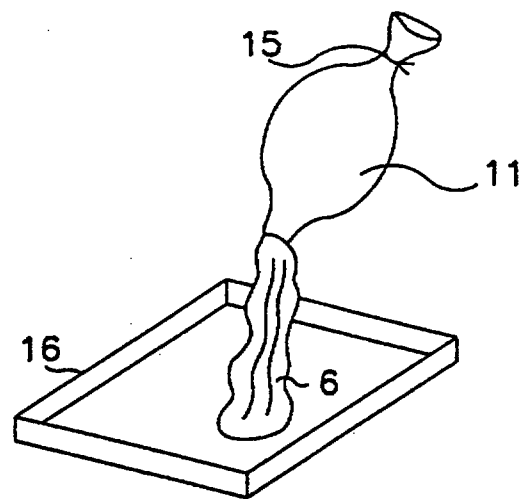


FIG. 8

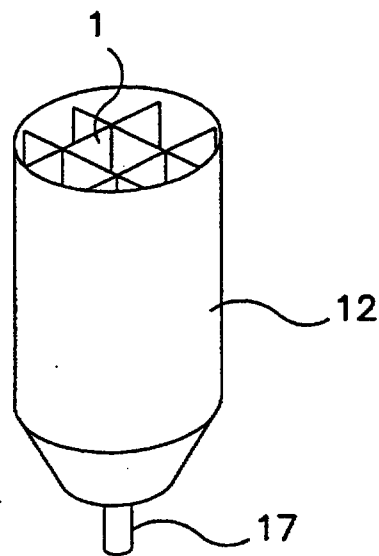


FIG. 9

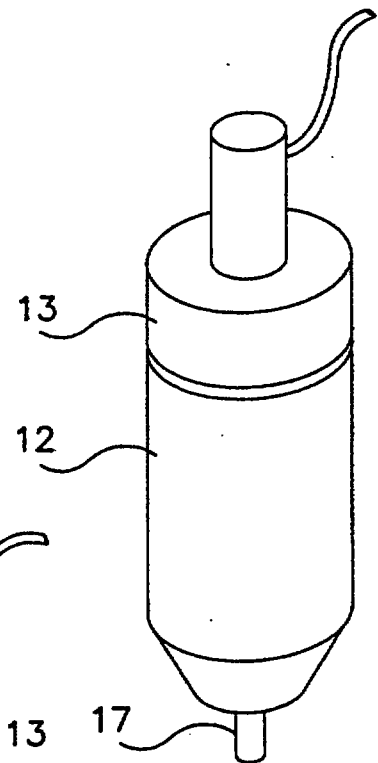


FIG. 10

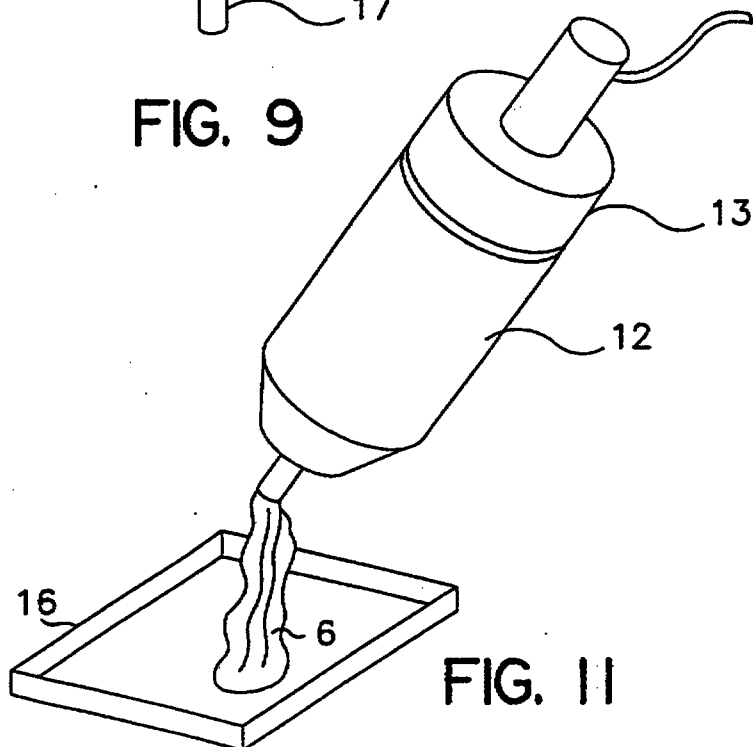


FIG. 11

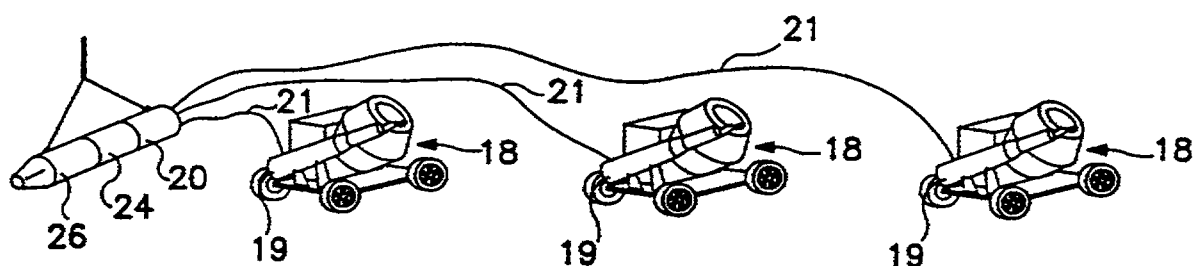


FIG. 12

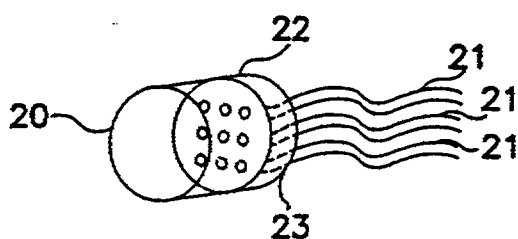


FIG. 13

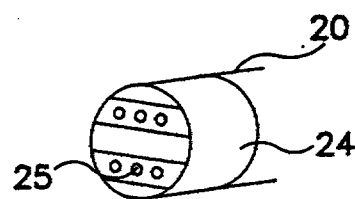


FIG. 14

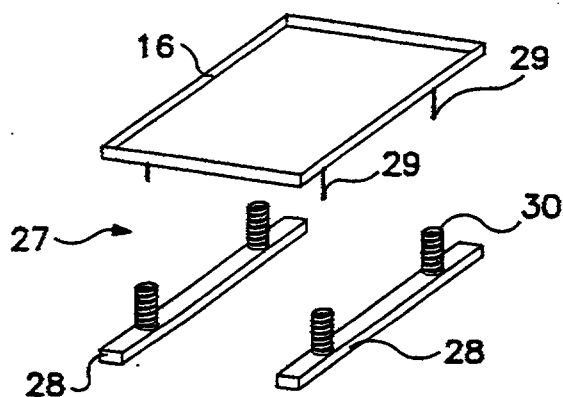


FIG. 15

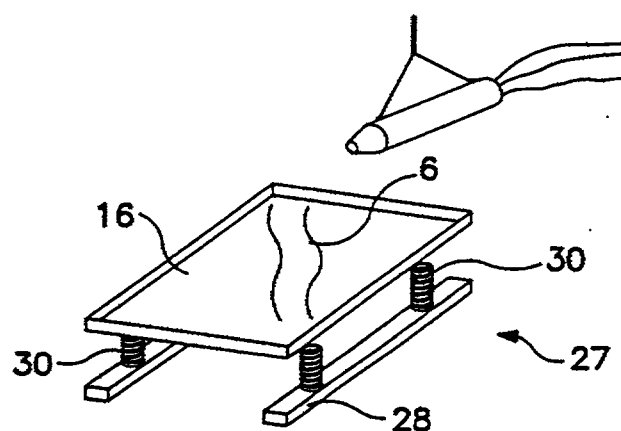


FIG. 16

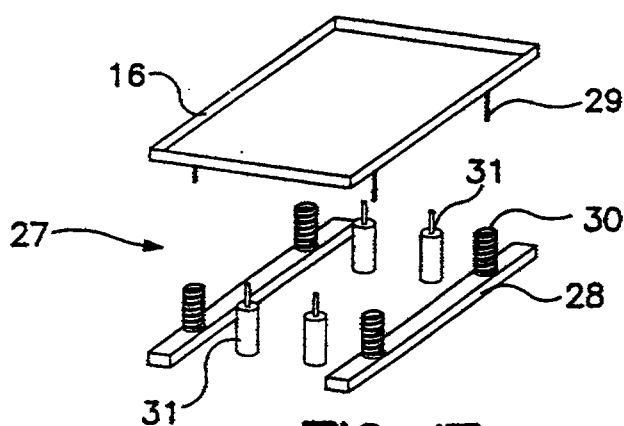


FIG. 17

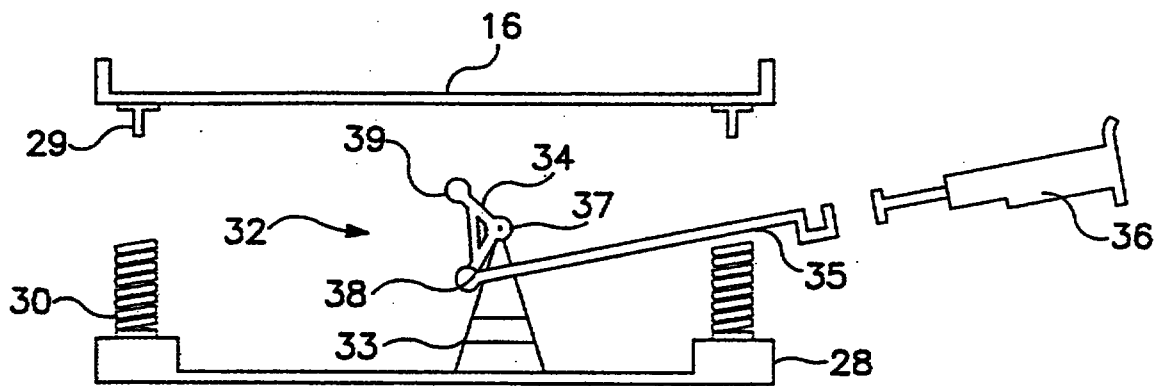


FIG. 18

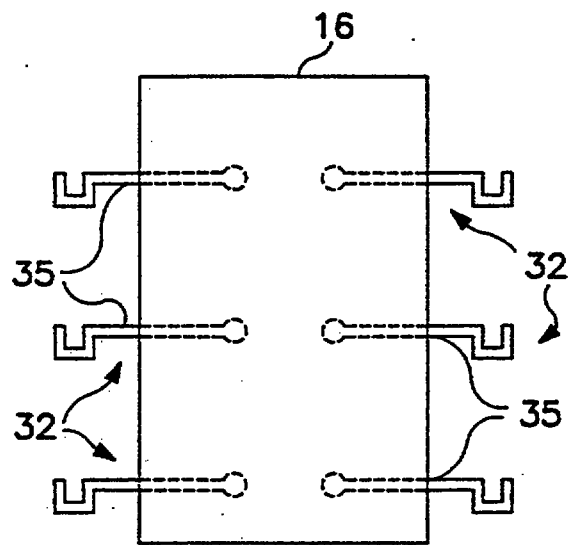


FIG. 19

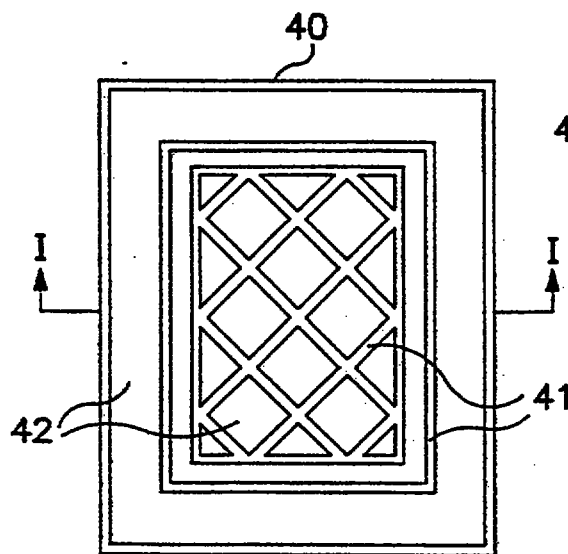


FIG. 20



FIG. 21

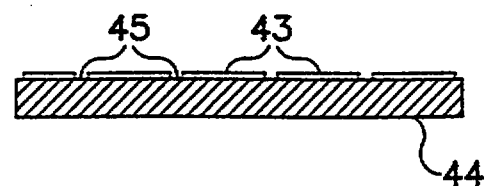


FIG. 22

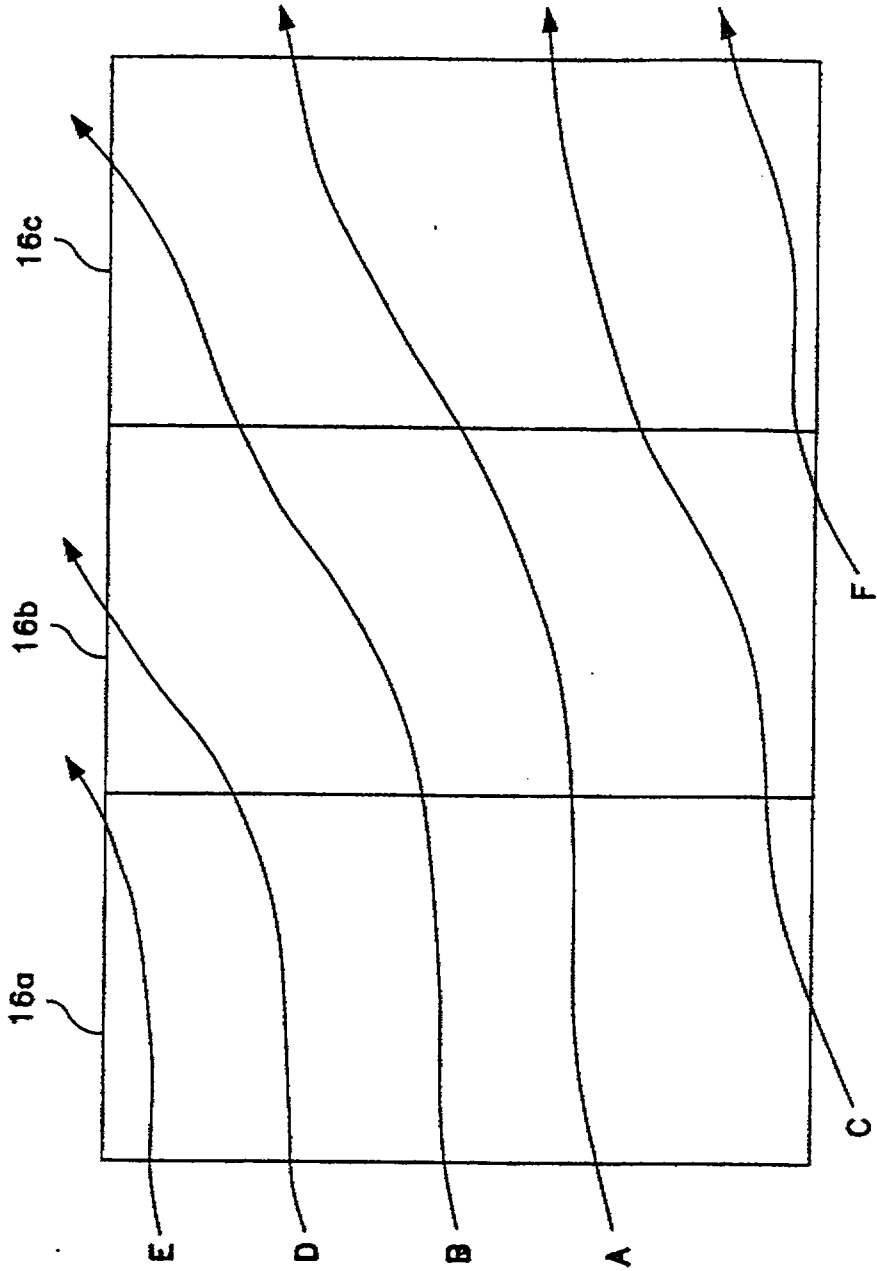


FIG. 24

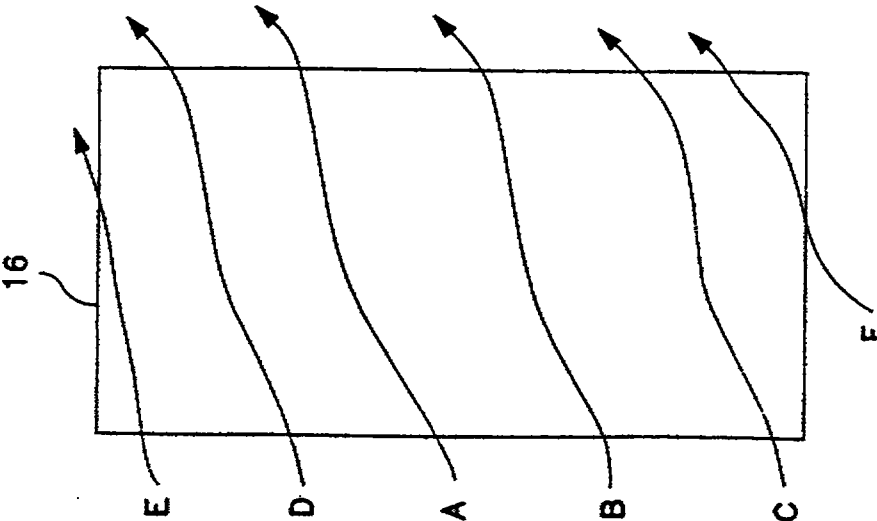


FIG. 23



1 1. A method for creating multicolor designs
 2 and patterns in cast articles comprising the steps of:
 3 a) preparing a mold to receive casting
 4 mixtures;
 5 b) preparing at least two wet casting
 6 mixtures of different colors at a viscosity to facilitate
 7 even pouring thereof;
 8 c) providing a formula setting forth a
 9 horizontal and vertical geometric arrangement for loading
 10 said casting mixtures into a container and providing a
 11 container therefor and loading said casting mixtures into
 12 said container according to said formula;
 13 d) transferring said loaded mixtures from
 14 said container to said mold, and;
 15 e) consolidating said mixtures in said mold
 16 into a physically uniform mass and allowing said mass to
 17 set;
 18 whereby a cast article is formed having a color
 19 pattern therein which pattern is determined by said
 20 formula by which said casting mixtures are loaded into
 21 said container.

1 2. The method of claim 1 wherein said
 2 consolidating step comprises applying low frequency, high
 3 amplitude shock waves to said mold.

1 3. The method of claim 2 further comprising
 2 removing said set mass from said mold and finishing a
 3 surface thereof.

1 4. The method of claim 1 further comprising
 2 providing a removable matrix in said container which



3 subdivides said container, and loading said casting
4 mixtures into said subdivided container according to said
5 formula wherein said formula is keyed to said subdivided
6 arrangement of said container.

1 5. The method of claim 4 further comprising
2 removing said matrix after loading said container.

1 6. The method of claim 5 wherein said loaded
2 mixtures are transferred to said mold by pouring from
3 said container.

1 7. The method of claim 6 further comprising
2 providing a pouring chamber removably attachable to said
3 container and having a plurality of baffles defining a
4 path through which said loaded mixtures pass upon
5 pouring, and pouring said loaded mixtures from said
6 container through said pouring chamber into said mold,
7 whereby said geometrically loaded mixtures flow around
8 said baffles in a predictable manner to create a color
9 pattern in said mold.

1 8. The method of claim 5 wherein said loaded
2 mixtures are transferred to said mold by extruding.

1 9. The method of claim 5 wherein said loaded
2 mixtures are transferred to said mold by spraying.

1 10. The method of claim 4 comprising removing
2 said matrix from said container, providing a nozzle at
3 one end of said container and a driven piston at an
4 opposite end of said container and driving said piston
5 into said container whereby said loaded mixtures are
6 extruded through said nozzle into said mold.

1 11. A method for casting multicolored cement



2 based casting mixtures and controlling patterning
3 thereof, comprising:

4 a) preparing a mold to receive said wet
5 cement based casting mixtures;

6 b) preparing at least two wet cement based
7 casting mixtures having different colors;

8 c) providing a container having a removable
9 matrix subdividing said container into at least two
10 subchambers;

11 d) loading said mixtures into said container
12 in a three-dimensional geometric pattern according to
13 said matrix and a repeatable formula devised therefor;

14 e) removing said matrix from said container
15 and attaching a baffled pouring aperture to said
16 container, and;

17 f) transferring said mixtures from said
18 container to said mold through said pouring aperture
19 whereby said baffled pouring aperture causes said
20 mixtures to flow and combine in a predictable manner for
21 controlling said patterning of said multicolored cement
22 based casting mixtures.

1 12. The method of claim 11 further comprising
2 consolidating said mixtures in said mold by application
3 of low frequency, high amplitude shock waves to said
4 mold.

1 13. The method of claim 12 wherein said
2 container comprises a flexible bladder from which said
3 mixtures are extruded through said aperture.

1 14. The method of claim 12 wherein said



2 container comprises a rigid cylinder having a piston
3 therein whereby said mixtures are extruded through said
4 aperture.

1 15. The method of claim 12 wherein said
2 container comprises a tiltable chamber with said baffled
3 pouring aperture attached at one end whereby, when said
4 matrix is removed, said chamber is tilted to pour said
5 mixtures therefrom through said baffled pouring aperture.

1 16. A method for producing reproducible
2 colored and patterned cement based castings which
3 simulate natural stone, comprising;

4 a) preparing two or more differently colored
5 wet cement based mixtures at a viscosity whereby said
6 mixtures are pourable but resist combining when placed
7 against each other;

8 b) providing a predetermined formula setting
9 forth amounts and arrangements whereby said mixtures are
10 to be loaded into a container to form a geometrically
11 loaded bulk mix and a container therefore;

12 c) loading said mixtures into said container
13 at geometrically predetermined positions both vertically
14 and horizontally within said container and in specific
15 amounts according to said formula thereby forming said
16 geometrically loaded bulk mix;

17 d) transferring said geometrically loaded
18 bulk mix from said container into a prepared form, and;

19 e) allowing said mixtures to set;

20 whereby a casting formed by said method has a
21 color pattern simulating natural stone which corresponds



22 to and is determined by said formula.

1 17. The method of claim 16 further comprising
2 applying low frequency, high amplitude shock waves to
3 said form to consolidate said mixtures.

1 18. The method of claim 17 comprising aiding
2 said geometric loading of said mixtures in said container
3 by providing a removable matrix temporarily subdividing
4 said container into which said different colored mixtures
5 are placed according to said formula, and wherein said
6 matrix is removed from said container after loading of
7 said mixtures and prior to transferring said bulk mix
8 into said form.

1 19. The method of claim 17 further comprising
2 providing a blending apparatus on said container and
3 transferring said bulk mix by pouring from said container
4 through said blending apparatus whereby said bulk mix is
5 partially blended during pouring and wherein said partial
6 blending is substantially predictable according to said
7 viscosity of said mixtures and fluid characteristics
8 thereof.

1 20. The method of claim 19 wherein said
2 blending apparatus comprises a pouring lip on said
3 container, said pouring lip having a fixed geometry.

1 21. The method of claim 19 wherein said
2 blending apparatus comprises a pouring nozzle attachable
3 to said container, said pouring nozzle comprising a
4 plurality of baffles defining a specific flow pathway for
5 said bulk mix.

1 22. The method of claim 16 wherein said



2 formula specifies an order, location and amount of each
3 of said cement mixtures to be loaded in said container.

1 23. A simulated stone made by the method of
2 claim 17 and having a pattern resembling marble.

1 24. A simulated stone made by the method of
2 claim 17 and having a pattern resembling granite.

1 25. A simulated stone made by the method of
2 claim 17 and having a pattern resembling sandstone.

1 26. A simulated stone made by the method of
2 claim 17 and having a pattern resembling travertine.

1 27. A method for preparing multicolored mixes
2 of castable materials, transferring said mixes to a mold,
3 and producing cast articles having a pattern simulating
4 natural stone from said mixes of said castable materials,
5 wherein said method comprises loading individual colors
6 of prepared castable materials into a container in a
7 geometric, three dimensional, horizontal and vertical
8 array according to a predetermined formula for said
9 pattern, providing a removable matrix subdividing said
10 container into an array of subchambers corresponding to
11 said predetermined formula and into which said castable
12 materials are loaded to form said geometric, three-
13 dimensional, horizontal and vertical array according to
14 said formula, and transferring said loaded castable
15 materials from said container to said mold in a manner
16 calculated to produce said pattern in said cast articles,
17 whereby said method renders production of said pattern
18 controllable and reproducible in a plurality of said cast
19 articles.



1 29. The method of claim 27 further comprising
2 removing said matrix from said container after loading
3 with said castable materials and before transferring.

1 31. The method of claim 27 wherein the
2 castable materials are transferred by pouring from said
3 container.

1 32. The method of claim 27 wherein said
2 castable materials are transferred from said container by
3 extruding.

1 33. The method of claim 27 wherein said
2 castable materials are transferred from said container by
3 spraying.

1 34. The method of claim 31 whereby said
2 pattern produced in said cast article simulates marble.

1 35. The method of claim 32 whereby said
2 pattern produced in said cast article resembles
3 sandstone.

1 36. The method of claim 33 whereby said
2 pattern produced in said cast article resembles granite.

1 37. A kit for producing cast articles having a
2 pattern simulating natural stone comprising:

3 a plurality of packages of pre-measured
4 and pre-mixed, colored, dry cementitious ingredients;

5 a loading container and removable dividing
6 matrix therefor;

7 instructions for preparing individual wet
8 mixes from said dry ingredients;

9 a chart keyed to divisions of said matrix
10 and designating an order for loading said container with




11 said wet mixes to create a specific three-dimensional
12 array in said container; and
13 pouring criteria directing the manner for
14 transfer of the loaded mixes from said chamber into a
15 mold.

1 38. The kit of claim 37 further comprising a
2 combination pouring chamber and baffle removably
3 mountable to said container and providing a pouring path
4 for said loaded mixes from said container to said mold
5 whereby said three-dimensional array is converted into a
6 substantially linear pattern corresponding to a simulated
7 natural stone pattern.

1 39. The kit of claim 38 wherein said container
2 comprises a flexible bladder and said combination pouring
3 chamber and baffle comprises a nozzle mountable in said
4 bladder, whereby said loaded mixes are extruded from said
5 bladder through said nozzle in response to pressure
6 exerted against the outside of said bladder.

1 40. The kit of claim 38 wherein said container
2 comprises a rigid cylinder, said combination pouring
3 chamber and baffle comprise a nozzle structure mountable
4 on one end of said cylinder, and said kit further
5 comprises a piston assembly mountable to the other end of
6 said cylinder whereby said piston fits within said
7 cylinder and exerts a force against said loaded mixes to
8 extrude said mixes through said nozzle.

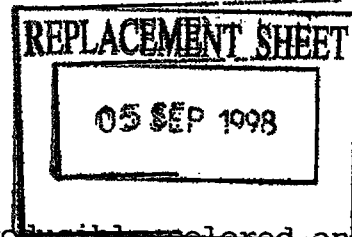

- 51 -


41. A method for producing reproducible ~~colored~~ and patterned castings which simulate natural stone having a pattern which continues from piece to piece, comprising the steps of;

- a) preparing at least one mold to receive casting mixtures by designating a pour design to be followed;
- b) preparing at least two different colored casting mixtures at a viscosity to facilitate even pouring;
- c) transferring the loaded mixtures to the molds in accordance with the pour design; and
- d) consolidating the mixture in the mold into a physically uniform mass and allowing the mass to set.

42. The method of claim 41 wherein the casting mixtures are loaded into a container in a horizontal and vertical geometric arrangement according to a predetermined formula for a particular pattern and are transferred to the mold from the container following the pour design.

43. The method of claim 41 further comprising casting a plurality of pieces, finishing the surface thereof, and erecting the pieces in adjacent positions whereby the pattern produced therein is continuous from one piece to the next.

44. The method of claim 41 wherein preparing the mold comprises creating a diagram showing pieces to be cast in adjacent positions with a representation of the pattern thereon

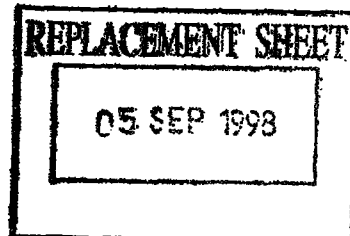

- 52 -

and transferring the representation to the mold to designate the pour design to be followed.

45. The method of claim 44 wherein the pattern is transferred as a series of lines across the mold.


46. The method of claim 44 wherein the pattern is transferred by marking entry and exit points for each part of the pattern on the edges of the mold.

47. The method of claim 44 wherein the pattern is transferred using a grid coordinate system applied to the mold.

48. The method of claim 44 comprising preparing a plurality of molds, wherein the molds are positioned adjacent to each other and the casting mixtures are transferred to the molds along a continuous path from one mold to the next following the pour design.

49. The method of claim 44 comprising preparing a plurality of molds, wherein the casting materials are separately transferred to each mold.

50. The method of claim 44 comprising preparing a plurality of molds wherein the casting materials are sequentially transferred to each mold.



- 53 -

51. The method of claim 41 applied to an automated environment wherein the pour design is an element of a computer program and the steps of preparation, loading and transferring the casting mixtures are controlled by the computer program.

52. The method of claim 41 wherein the pour design defines at least one path along which at least one colored casting mixture is poured.

53. The method of claim 44 wherein the pour design corresponds to an arrangement of veins in a pattern to be cast and the pour design is such that the resulting arrangement of veins continues from one cast piece to the next.

54. The method of claim 44 wherein the pour design is predetermined for a particular pattern and natural stone appearance.

55. The product made by the method of claim 41.

56. The method of claim 42 wherein the loaded casting mixtures are transferred by pouring.

57. The method of claim 42 wherein the loaded casting mixtures are transferred by extruding.

58. The method of claim 42 wherein the loaded casting mixtures are transferred by spraying.




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B28B 1/08, 1/32, B29C 31/02, 31/10, 39/12, 41/22, B44F 7/00 ✓	A1	(11) International Publication Number: WO 97/24209 ✓ (43) International Publication Date: 10 July 1997 (10.07.97)
(21) International Application Number: PCT/US96/20320 ✓ (22) International Filing Date: 27 December 1996 (27.12.96) ✓ (30) Priority Data: 08/579,697 ✓ 28 December 1995 (28.12.95) ✓ US (71)(72) Applicant and Inventor: AUSTIN, Mark [US/US]; 31 Pierce Street, New Rochelle, NY 10801 (US). (74) Agents: SHERMAN, Leonard, W. et al.; Sherman & Shal- loway, 413 North Washington Street, Alexandria, VA 22314 (US).	(81) Designated States: AL, AU, BA, BB, BG, BR, CA, CU, CZ, EE, GE, HU, IL, IS, JP, KP, KR, LC, LK, LR, LT, LV, MG, MK, MN, MX, NO, NZ, PL, RO, <u>SG</u> , SI, SK, TR, TT, UA, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: METHOD AND APPARATUS FOR CREATING PATTERNS IN CAST MATERIALS ✓

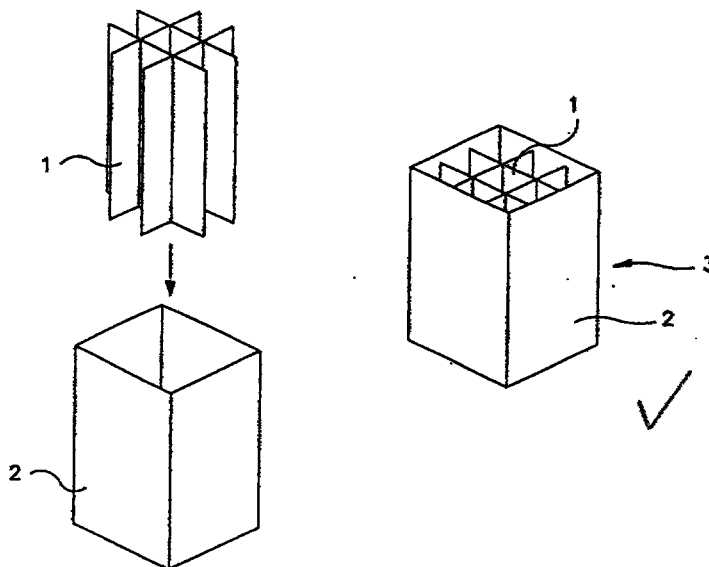

(57) Abstract

A process for creating aesthetically pleasing multicolor designs and patterns in cast materials (6), particularly cementitious materials, which may be used to imitate natural stone in appearance. The process includes the steps of preparing multiple colors of the casting material (6), geometrically loading these colors in a three-dimensional array in a holding container (2) according to formulas corresponding to particular patterns to be created, placing the geometrically loaded colors into a mold (16) by pouring, extruding, and spraying, consolidating the mixtures (6) in the mold (16) and allowing them to set, and removing the cast structure from the mold (16) followed by polishing and sealing if required. A removable matrix (1) in the holding container (2) provides the ability to reliably repeat patterns according to the loading formulas.