

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 January 2003 (03.01.2003)


PCT

(10) International Publication Number
WO 03/000582 A1

- (51) International Patent Classification⁷: **B66C 1/66**, B66F 9/18
- (74) Agents: **McCALLUM, Graeme, David** et al.; Lloyd Wise, Tanjong Pagar, P.O. Box 636, Singapore 910816 (SG).
- (21) International Application Number: PCT/SG01/00131
- (22) International Filing Date: 22 June 2001 (22.06.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **NAT-STEEL ENGINEERING PTE. LTD.** [SG/SG]; 26 Tanjong Kling, Singapore 628051 (SG).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **CHEW, Chye, Heng** [SG/SG]; 49 Tagore Avenue, Singapore 787667 (SG).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: LIFTING APPARATUS

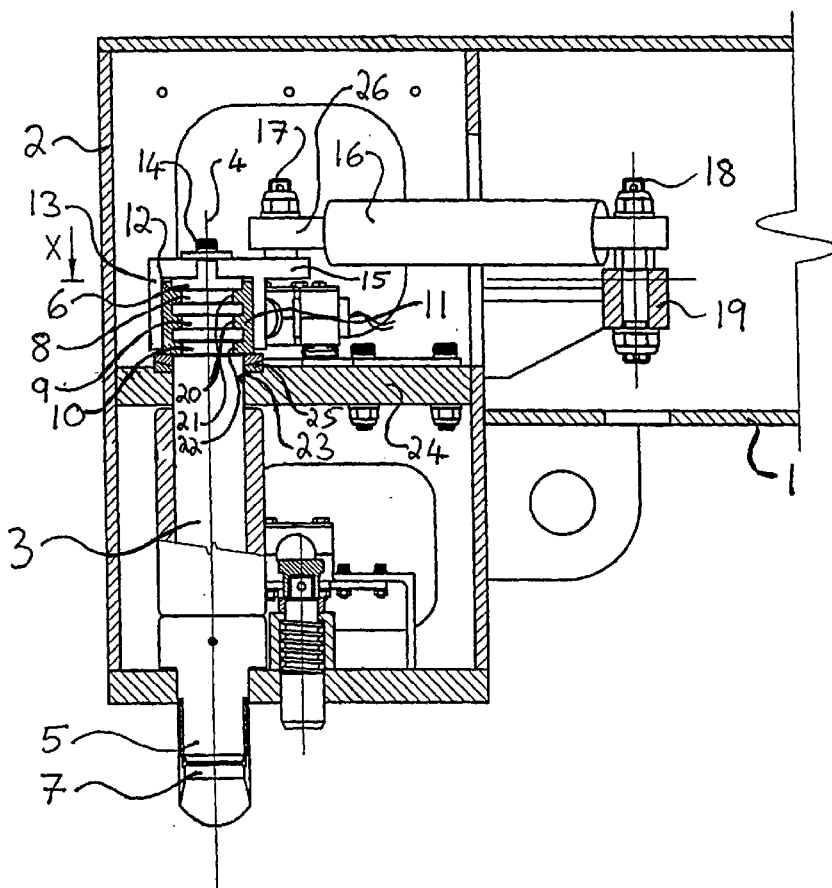

(57) Abstract: Apparatus for lifting a freight container has a frame (1) and a number of pickup elements (3) coupled to the frame (1). Each pickup element (3) has an engagement end (5), adapted to engage with an engagement aperture in a freight container, and a fixing end (6). The fixing end (6) is secured to the frame and the fixing end (6) includes at least two formations (8, 9, 10) formed in the fixing end. A fixing member (11, 12) is engaged with the formations (8, 9, 10) and a retaining device (13) retains the fixing member (11, 12) in engagement with the fixing end (6). The fixing member (11, 12) securing the pickup element (3) to the frame (1) when the fixing end (6) of the pickup element (3) is positioned in a securing position on the frame (1) and the fixing member (11, 12) is engaged with the fixing end (6).



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.