



(51) International Patent Classification:

A47J 29/00 (2006.01) A47J 43/14 (2006.01)
A47G 19/28 (2006.01)

(21) International Application Number:

PCT/EP2023/057352

(22) International Filing Date:

22 March 2023 (22.03.2023)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: SANOVO TECHNOLOGY A/S [DK/DK];
Datavej 3, Holluf Pile, 5220 Odense SØ (DK).

(72) Inventor: TRANGBÆK, Michael Elkjær; Datavej 3,
Holluf Pile, 5220 Odense SØ (DK).


(74) Agent: AWA DENMARK A/S; Strandgade 56, 1401
Copenhagen K (DK).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, CV,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,
SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ,
RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,
DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: AN APPARATUS AND A METHOD FOR PEELING BOILED EGGS

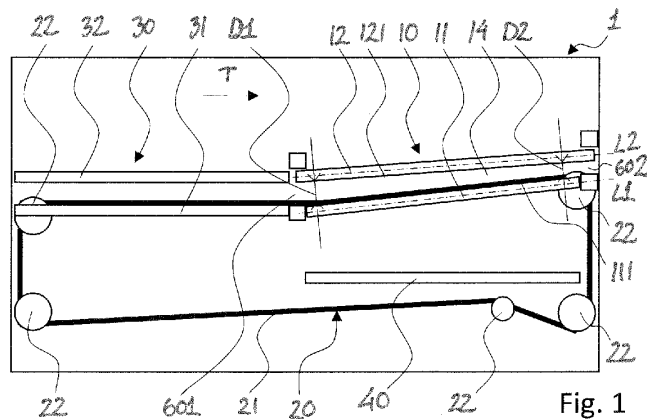

(57) Abstract: An apparatus (1) for peeling boiled eggs (60) is disclosed. It comprises a peeling section (10) having an egg inlet (601) and an egg outlet (602), and an egg transport direction (T) extending from the egg inlet (601) to the egg outlet (602). The peeling section comprises at least two elongated peeling elements (11) each extending along a respective longitudinal axis and being rotatable about the respective longitudinal axis and at least one elongated pushing element (12) arranged at a distance from the elongated peeling elements. An egg contact surface (121, 127) of the elongated pushing element (12) is angled in relation to egg contact surfaces (111) of the elongated peeling elements (11) so that the distance between the egg contact surfaces is bigger at the egg inlet (601) than at the egg outlet (602). A method for peeling eggs is also disclosed.

[Continued on next page]

Published:

— with international search report (Art. 21(3))