(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
18 December 2014 (18.12.2014)

WIPO | PCT

(10) International Publication Number
WO 2014/198797 A1

(51) International Patent Classification:
A61M 5/20 (2006.01)

(21) International Application Number:
PCT/EP2014/062166

(22) International Filing Date:
11 June 2014 (11.06.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1310389.0 11 June 2013 (11.06.2013) GB

(71) Applicant: **CILAG GMBH INTERNATIONAL** [CH/CH]; Landis + Gyr-Strasse 1, CH-6300 Zug (CH).

(72) Inventors: **BITAR, Ahmad**; 56 Great Eastern Street, Cambridge CB13AD (GB). **JENNINGS, Douglas Ivan**; 25 Parklands, Royston, Herts SG8 9HL (GB).

(74) Agents: **BRUNNER, John Michael Owen** et al.; Carpmaels & Ransford LLP, One Southampton Row, London WC1B 5HA (GB).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

(54) Title: INJECTION DEVICE

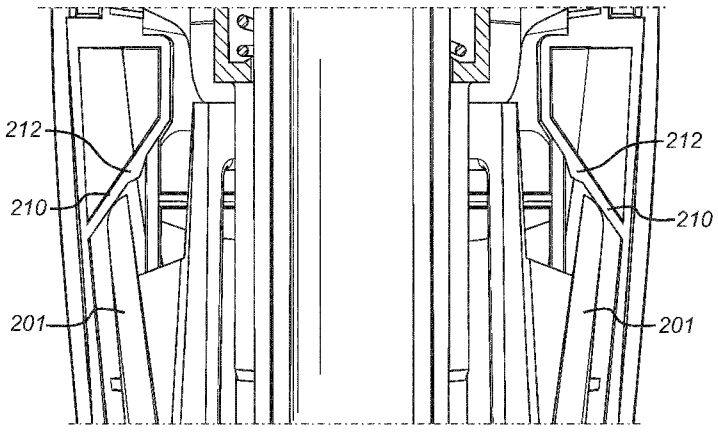


FIG. 8

(57) Abstract: An injection device for delivering an injection comprises a housing having a longitudinal axis, a proximal end and a distal end, the housing being arranged such that the injection is delivered from its distal end; and a release mechanism comprising an impediment, the release mechanism being moveable between a first position, in which the impediment is in an impeding position so as to impede the delivery of the injection, and a second position, in which the impediment is in a non-impeding position so as to not impede the delivery of the injection, wherein the force required to move the release mechanism from the first position to the second position varies with the distance moved by the release mechanism, the variation in the force required with distance being represented by a force profile, which is non-linear.

WO 2014/198797 A1