

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 January 2002 (31.01.2002)

PCT

(10) International Publication Number
WO 02/08067 A2

(51) International Patent Classification⁷: **B65D**

(21) International Application Number: PCT/US01/22541

(22) International Filing Date: 18 July 2001 (18.07.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/220,196 24 July 2000 (24.07.2000) US
60/247,986 14 November 2000 (14.11.2000) US

(71) Applicant: **S. C. JOHNSON HOME STORAGE, INC.**
[US/US]; 1525 Howe Street, Racine, WI 53403 (US).

Fenceline Road, Franksville, WI 53126 (US). **ROHRER, Michael, J.**; 6413 Ptarmigan Road, Racine, WI 53406 (US). **DUVALL, James, H.**; 9545 Green Valley Drive, Mentor, OH 44060 (US). **SHAW, Robert, M.**; Apartment 204, 9107 Chillicothe Road, Kirtland, OH 44094 (US).

(74) Agents: **CHAPMAN, Kristin, L.** et al.; S. C. Johnson Home Storage, Inc., Patent Section, 1525 Howe Street, Racine, WI 53403 (US).

(81) Designated States (*national*): AU, BR, CA, CN, IL, JP, KR, MX, NZ, PL, SG, ZA.

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).


Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(72) Inventors: **MCREYNOLDS, Kent, B.**; 1117-5 Mile Road, Racine, WI 53402 (US). **TONEY, Kenneth, A.**; 12307 Mallory Avenue, Baton Rouge, LA 70816 (US). **MCCREE, John, O.**; 115 Bay Shore Drive, Bay City, MI 48706 (US). **SABOL, John, S.**; 4344 North M-30, Sanford, MI 48657 (US). **KOLOSOWSKI, Paul, A.**; 3518

(54) Title: PRESSURE SENSITIVE FOOD GRADE WRAP FILM AND PROCESS FOR MANUFACTURING SUCH A FILM

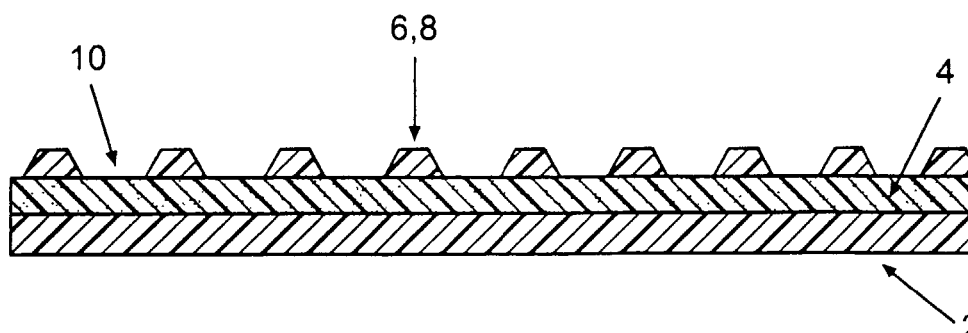

(57) Abstract: A flexible pressure-sensitive food grade wrap film, and a process for manufacturing the film. The film includes a substrate overcoated with a pressure-sensitive adhesive, a release overprinted on the adhesive that prevents the adhesive from clinging to the surface of an article or to itself without applying pressure, and, optionally, a release coating on the opposite side of the substrate. Once pressure is applied to the film, the film flexibility allows the adhesive to contact the surface of the article or itself and subsequently adhere to hold the film in place or to form a sealed pouch around an article. The pressure-activated contact and adhesion to an article or to itself are designed to form a tight, spill-resistant physical bond that seals liquid or solid contents in a container, or forms a sealed pouch around a solid article.



WO 02/08067 A2