



(51) International Patent Classification:
B01F 7/00 (2006.01) **F04D 29/34** (2006.01)
B63H 1/20 (2006.01)

(21) International Application Number:
PCT/SE2011/050274

(22) International Filing Date:
14 March 2011 (14.03.2011)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
1050242-5 17 March 2010 (17.03.2010) SE

(71) Applicant (for all designated States except US): **ITT Manufacturing Enterprises Inc** [US/US]; 1105 North Market Street, Wilmington, DE 19801 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **PYDDOKE, Thomas** [GB/SE]; Dellensvägen 6, S-120 58 Årsta (SE).

(74) Agent: **BRANN AB**; P.O. Box 12246, S-102 26 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: PROPELLER ASSEMBLY COMPRISING ONE HUB AND AT LEAST TWO BLADES

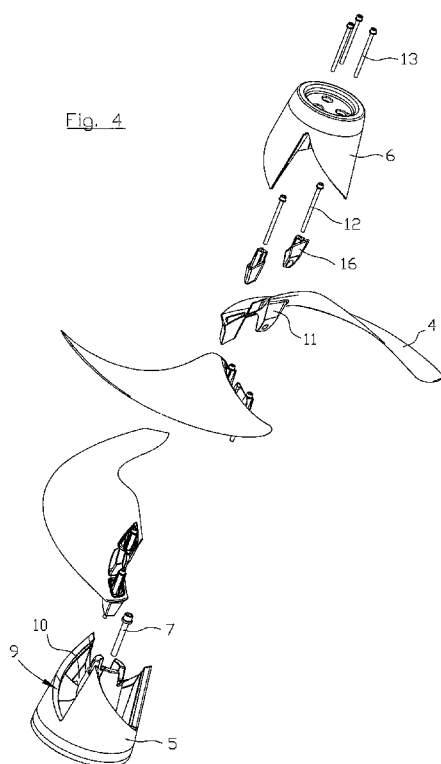

(57) Abstract: The inventions refer to a mixer assembly for generating and maintaining a movement within waste water, comprising a hub (3) and at least two blades (4), which are disengageably connected to said hub (3), the hub (3) in a rear end being arranged to be connected to a drive shaft and thereby being arranged to be driven in rotation about an axially extending centre axis. According to the invention the hub (3) comprises a seat (9) for each of said at least two blades (4), each seat (9) comprising an axially extending first engagement means (10), and that each blade (4) comprises an axially extending second engagement means (11), said first engagement means (10) and said second engagement means (11) together being arranged to admit axial mutual displacement of said hub (3) and each of said blades (4) during mounting/demounting of the propeller assembly, and is thereto arranged to prevent radial mutual displacement of said hub (3) and each of said blades (4) when the mixer assembly is in an assembled condition.



Published:

— *with international search report (Art. 21(3))*