

1/10

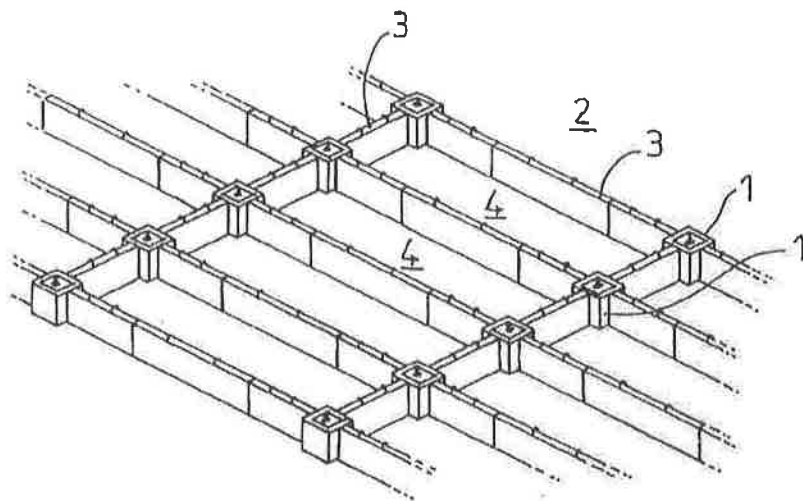


FIG.1

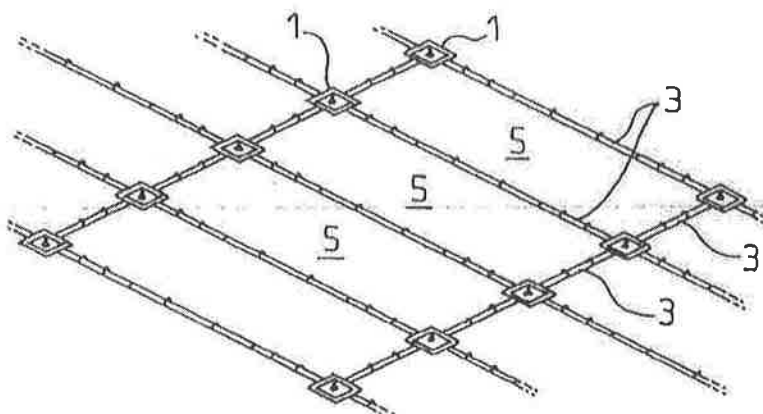


FIG.2

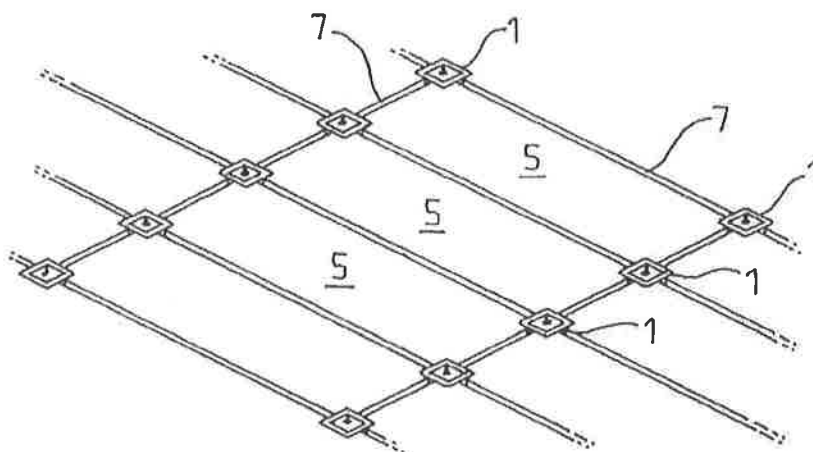


FIG.3

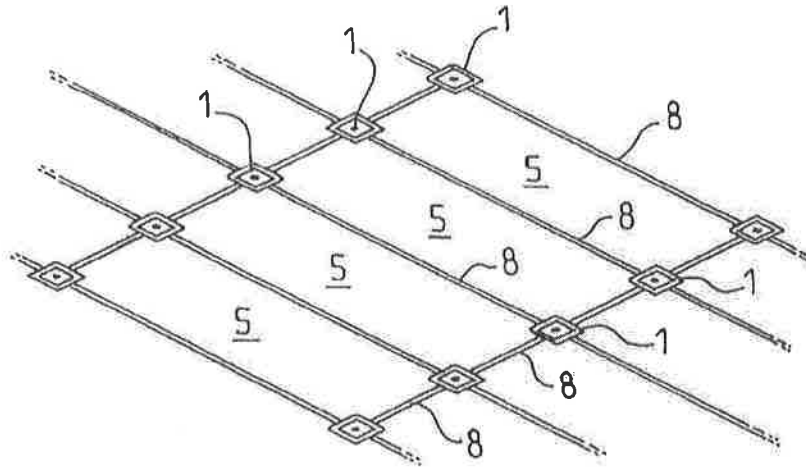


FIG. 4

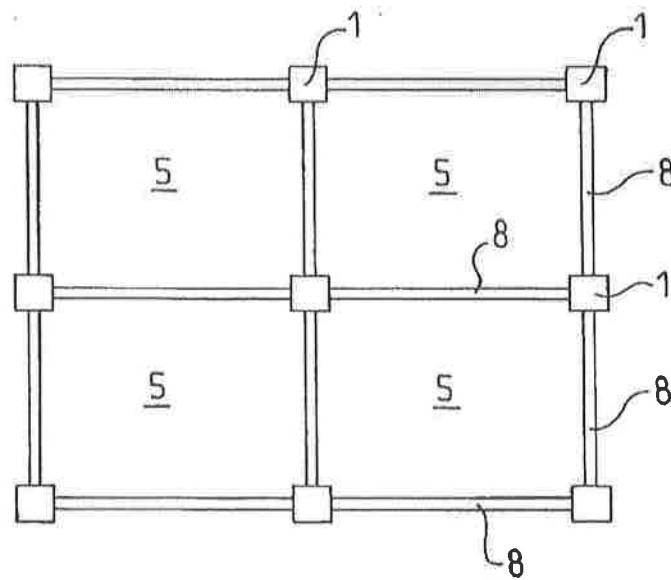


FIG. 5

FIG.6

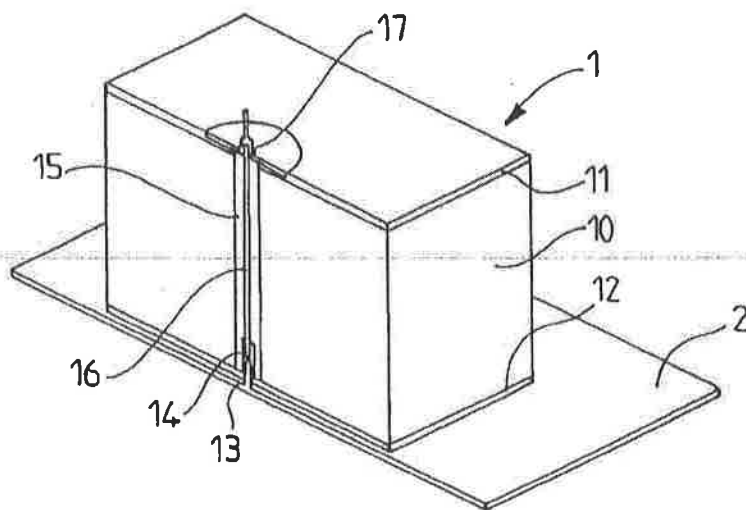
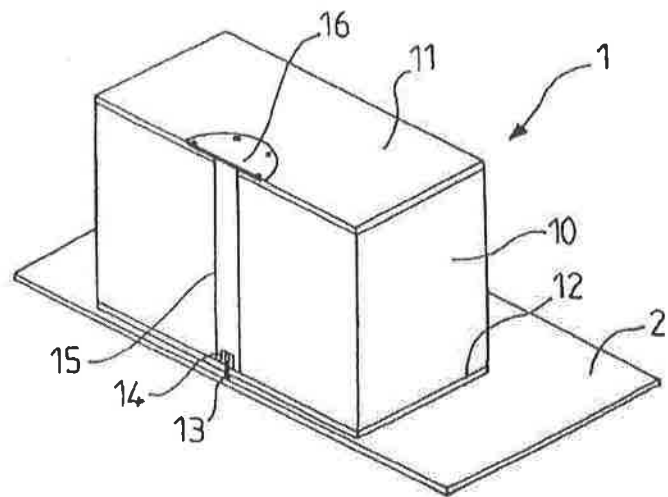


FIG.7

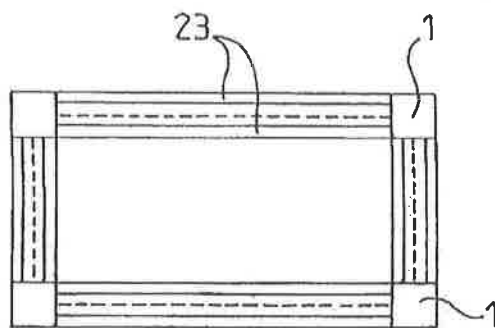


FIG.8

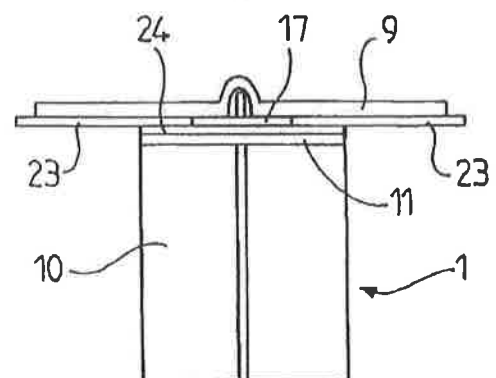


FIG.9

This diagram shows a cross-sectional view of a device 1. It features a central vertical shaft 13 passing through a block 10. A component 14 is mounted on the shaft 13. Above the block 10, there is a component 21 with a central opening, and a component 22 is positioned within this opening. The top surface of the device is indicated by a dashed line with a wavy pattern, labeled 9.

FIG.11

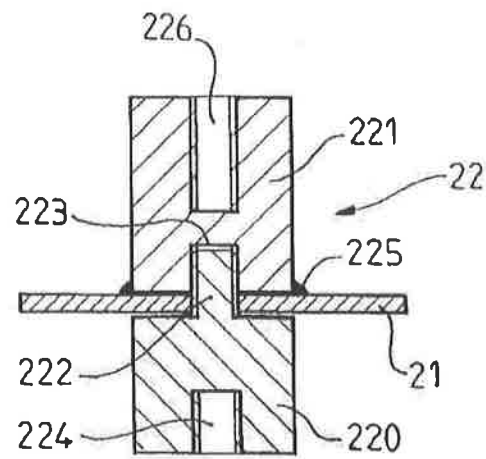


FIG. 12

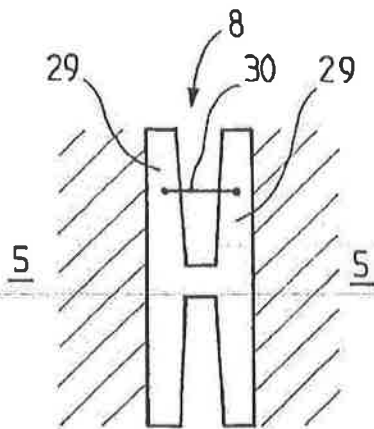


FIG. 13

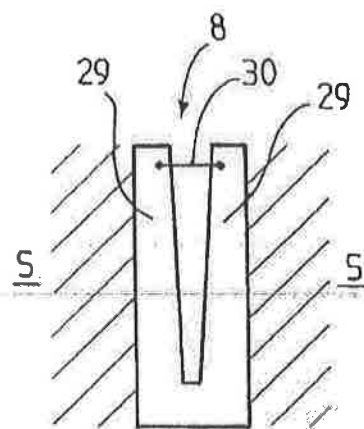


FIG. 14

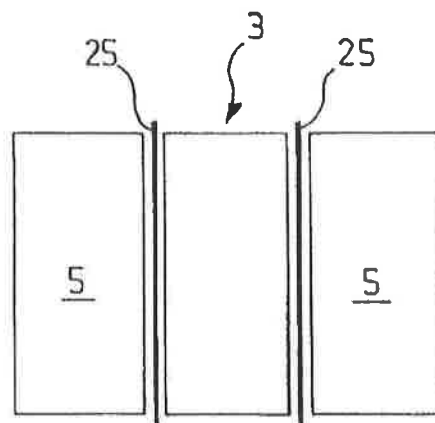


FIG. 15

6/10

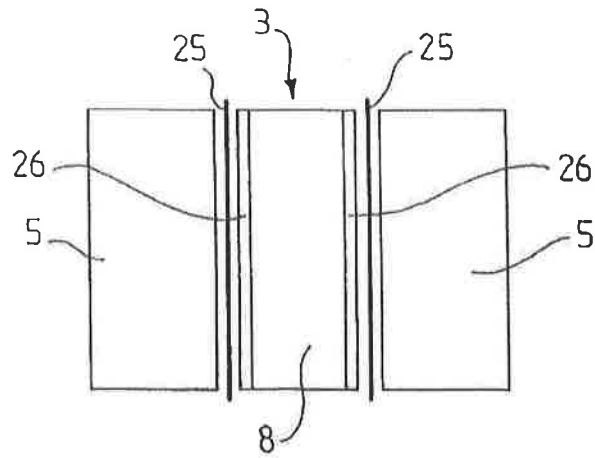


FIG. 16

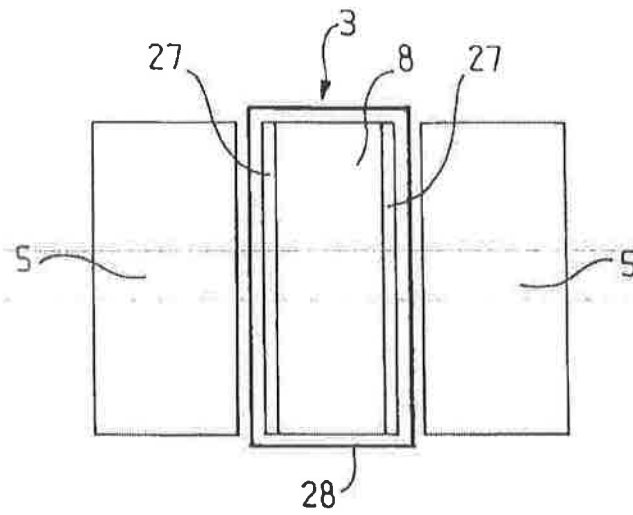


FIG. 17

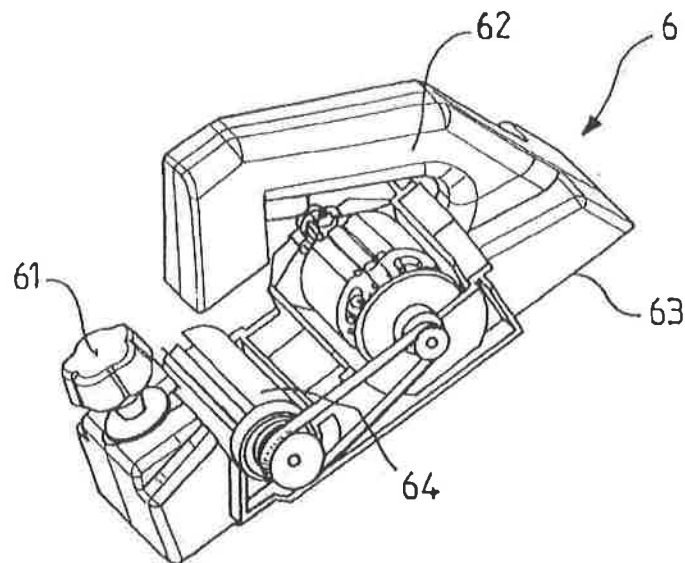


FIG. 18

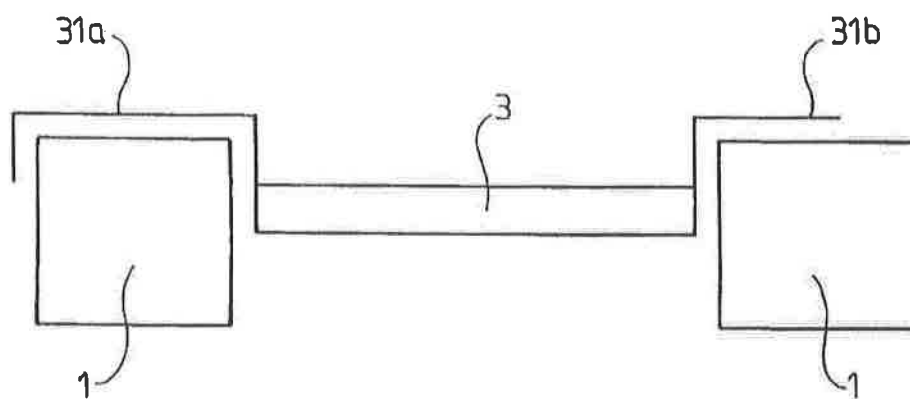


FIG.19

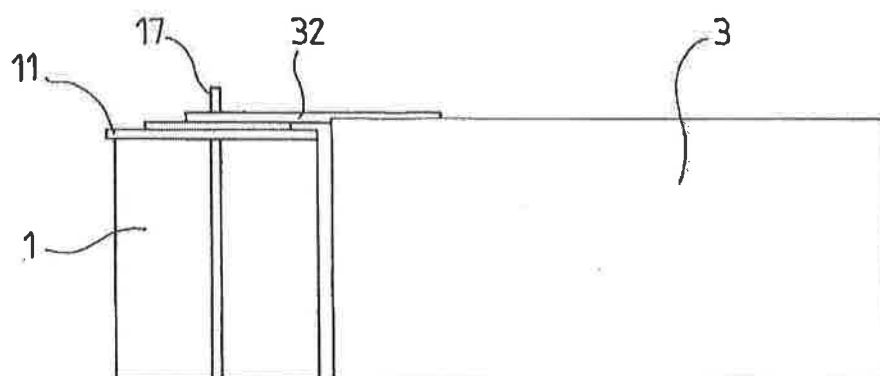


FIG.20

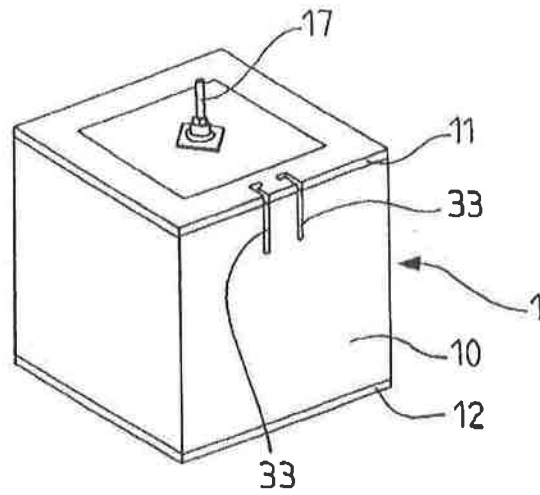


FIG. 21

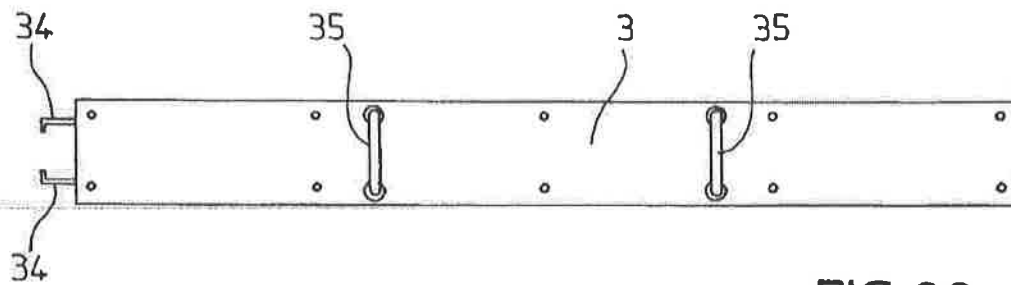


FIG. 22

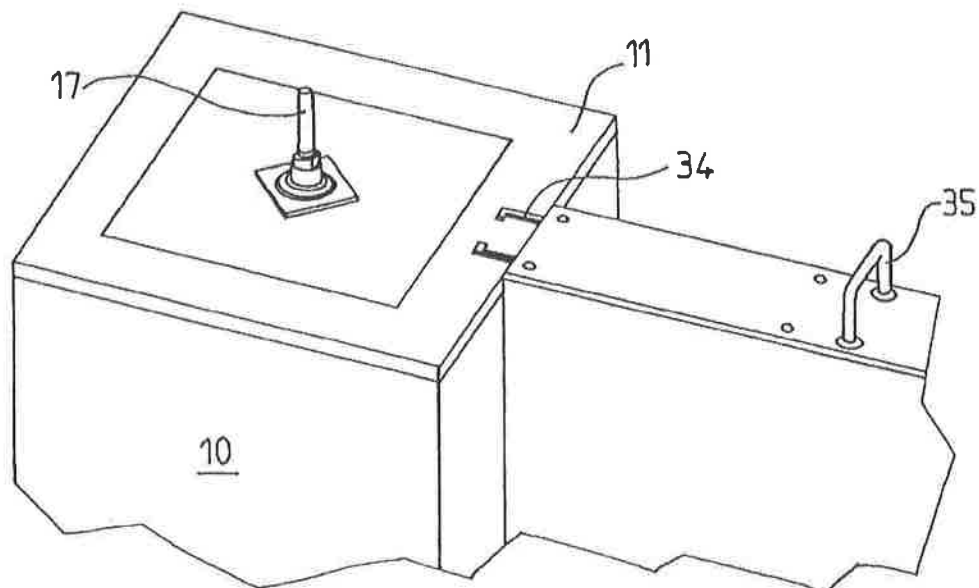


FIG. 23

9/10

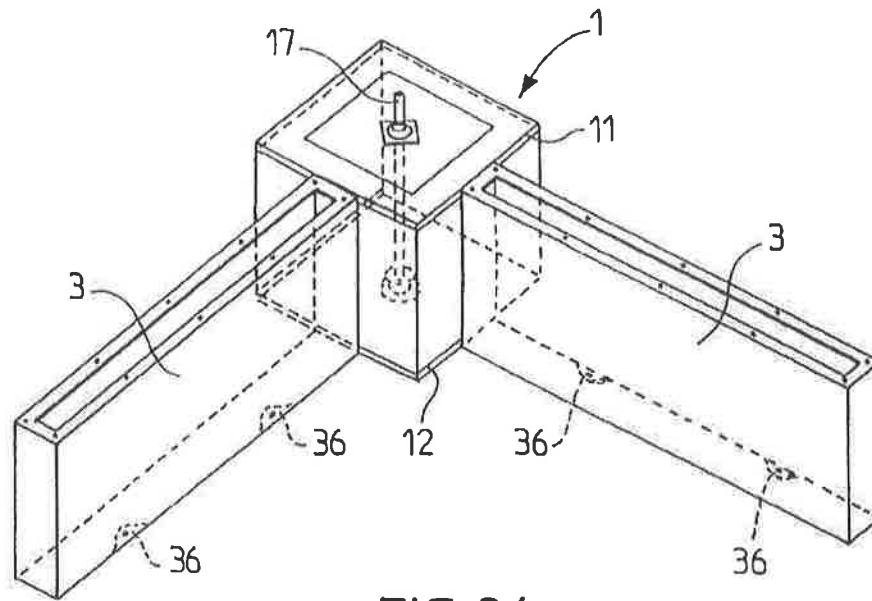


FIG. 24

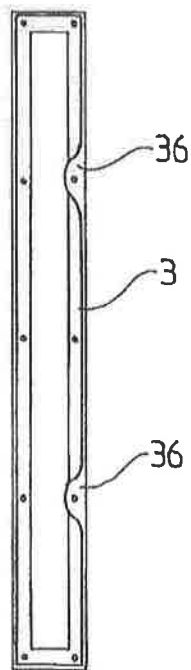


FIG. 25

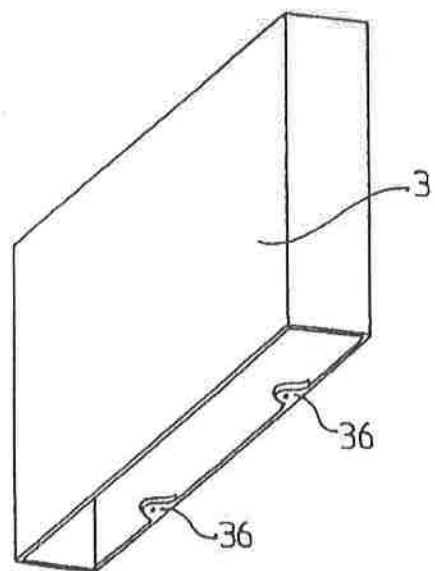


FIG. 26

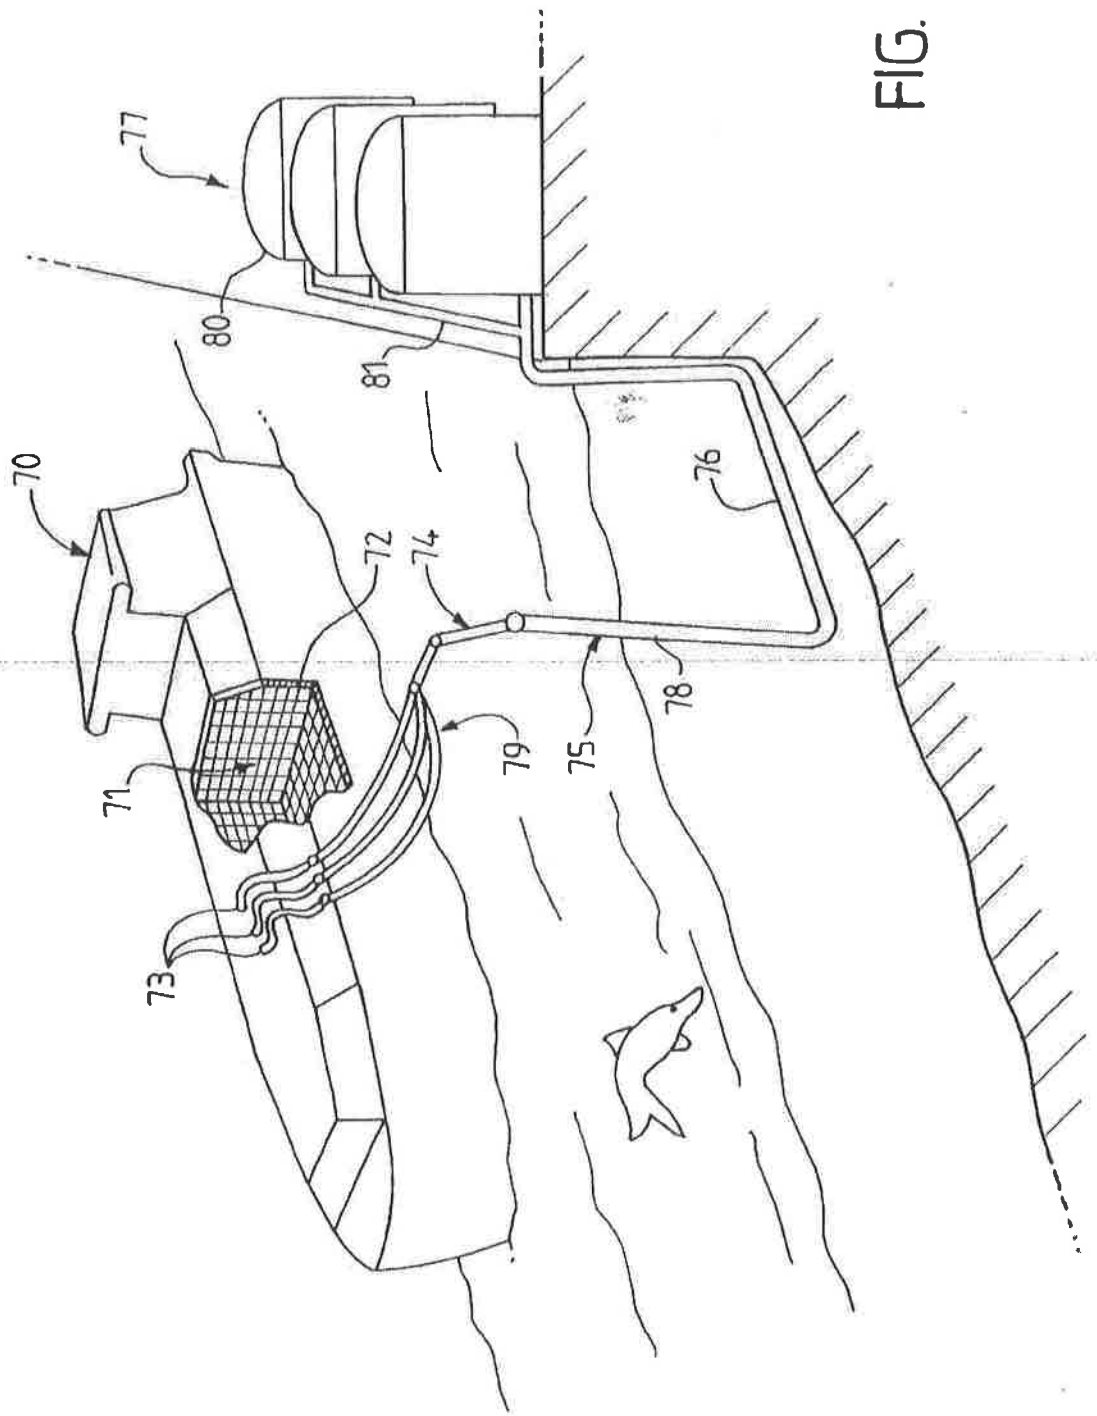


FIG. 27