RTMP copy

Method for recovering bare semiconductor chips from plastic packaged modules

Field of Invention

The present invention relates to plastic encapsulated semiconductor chips and more particularly to an opening method for recovering the bare semiconductor chips from the plastic packaged modules wherein the chip is encapsulated without any damage for the chip. As a result, the method allows to recover fully functional and testable chips for any purpose, e.g. for examination/inspection, analysis, or re-use (possibly after repair). The method of the present invention is applicable to any plastic packaged modules even when the semiconductor chip is molded in a plastic encapsulating resin which is resistant to known etching techniques.

Background of the Invention

Plastic package decapsulation (or depacking) is absolutely necessary for construction and failure analysis of plastic packaged components, typically semiconductor chips. Especially in the case of failure analysis, identification of the cause of a defective chip implies that the opening method keeps the full integrity of the devices integrated in the chip and of the metallic interconnections as well. Likewise, it is often necessary to physically evaluate VLSI devices for the purpose of product reliability, validation of physical design and identification of device structural patterns. Finally, at the present time, high volume supplies of verifiable bare chips are spotty in the merchant market since some suppliers will not even sell

This Sheet Has Been Replaced



REPLACED SHEETS SG
☑ Description : paged ..... 1 to paged 14
☑ Claim(s) : paged ..... 15 to paged 16
☐ Drawing(s) : paged ..... to paged ~~.....~~
☐ Abstract : paged ..... 17 to paged ~~.....~~

bare chips. This situation has forced some module manufacturers to purchase packaged chips and to remove the chips for re-use at considerably increased costs. Bare chip quality is the major issue of these module manufacturers, because they do not want to find themselves recovering chips not fully functional for re-use. As a result, in addition to functionality aspects, chip testability is also an essential concern, because the opening method must not only let the chip functional but also in good conditions for the test. Therefore, the base problem to be solved is to develop a reliable method to open plastic packaged modules to recover the bare semiconductor (typically silicon) chip enclosed therein without altering its physical and electrical integrity.

Wet chemical methods using hot fuming nitric acid are extensively used with silicon nitride (Si3N4) and/or silicon oxide (SiO2) passivated silicon chips. When the silicon chip is passivated with polyimide, these methods are inoperative because nitric acid damages the polyimide material and thus does not preserve chip functionality (in case of polyimide passivation only manual polishing is used). A more specific problem recently emerges with SiO2/Si3N4 passivated silicon chips, when very hard, etch resistant plastic resins are used as the molding compound to encapsulate the chip. For instance, the TOSHIBA KE 2000H plastic resin belongs to this category. This plastic resin has outstanding properties in terms of hermeticity, reliability, and purity (absence of contaminants). Unfortunately, its complete removal of this plastic resin without damaging the encapsulated chip revealed to be a very difficult task because it is totally unattackable by any acid including hot fuming nitric acid.

Fig. 1 shows a conventional plastic packaged module of the SOJ (Small Outline J-Lead) model wherein a silicon chip is molded. Fig. 1 (A) shows a cutaway view of the plastic

This Sheet Has Been Replaced



packaged module with a part of the plastic encapsulation removed, (B) shows a cross sectional view of the module, and (C) shows a schematic enlarged view at the vicinity of the chip terminal connection system. Now turning to Fig. 1 there is shown a conventional plastic packaged module 10 incorporating a silicon chip 11 whose active surface is mounted side-up. The packaged module 10 has a plurality of lead frame conductors 12 extending through the plastic encapsulating resin 13 which are adhesively joined to the silicon chip 11, preferably by means of a composite polymeric layer 14. Typically, this composite layer consists of a sandwich formed by a bottom polyimide polymeric layer 14a glued to an alpha barrier layer 14b. The alpha barrier layer is a film of a polymer material having a melting temperature above 175°C and does not contain ionizable species. One such polymer material that can be used as an alpha barrier is KAPTON (a trademark of DuPont). A 30 um diameter gold wire 15 is thermosonically bonded between each conductor of the lead frame and the contact zone of the chip. In addition, this composite polymeric layer 14 may reveal to be useful should the lead frame conductors dissipate excess heat that could damage the chip.

A more detailed construction at the vicinity of the terminal connection system where the gold wire 15 is attached to the chip 11 is shown in the enlarged view (C) of Fig. 1. Now turning to Fig. 1(C), there is illustrated a standard silicon chip 11 consisting of a silicon substrate 16 (wherein active/passive devices are formed) up to the phosphosilicate glass (PSG) insulating layer including the tungsten studs (not shown). The first metallization level (M1) is represented by land 17. A passivating layer 18 is formed thereon. Typically, according to the scope of the present invention, this passivating layer 18 is made of an inorganic material such as silicon nitride Si3N4 and/or silicon dioxide SiO2, as known for those skilled in the

This Sheet Has Been Replaced



art. The passivation layer 18 is provided with an opening or via-hole. The second level of metallization (M2) is formed in this via-hole and result in a contact zone 19 where the gold wire 15 is bonded. For instance, according to an advanced CMOS technology used to manufacture 16 Mbits DRAM chips, the first and second metallization levels consist of a composite metallurgy: Ti-AlCuSi-TiN-Si and Ti-AlCuSi-TiN respectively. The other end of the gold wire 15 is bonded to one of the inner lead or conductor 12 of the leadframe (not shown). When the gold wire 15 is thermosonically bonded to the chip contact zone 19, there is formed a ball-shaped connection 20 which is made apparent from the enlarged view (C) of Fig. 1.

In the preferred embodiment of Fig. 1, the chip contact zones 19 are located along a center area of the chip 11 along the longitudinal axis. As such, the plastic packaged module 10 of Fig. 1, is very attractive in many respects. In addition to its role of serving as an alpha barrier, the composite polymeric layer 14 cooperates with conductors 12 (which cover a substantial portion of the chip surface) to facilitate the dissipation of heat generated by the chip. Moreover, the short connecting wires 15 contribute to faster chip response. This particular chip/packaging combined technology is described and claimed in commonly assigned US patents 4 796 098 and 4 862 245. This technology is extensively used for the packaging of 1, 4 and 16 Mbits DRAM chips (in this latter case, the central area containing the chip contact zones is transverse instead of being longitudinal as illustrated in Fig. 1) and is currently designated under the brand name of A-wire (A stands for Area-window).

Description of a Method of the Prior Art

The different processing steps of a conventional opening method that is capable to remove hard molding resins, such

This Sheet Has Been Replaced



as the TOSHIBA KE 2000H (which is extensively used for the encapsulation of the advanced semiconductor memory products mentioned above), will now be described in conjunction with Figs. 2 and 3.

Fig. 2 illustrates the module 10 of Fig. 1 at various stages of the opening method. Figs. 3(A) and 3(B) are microphotographs showing enlarged views at the vicinity of the chip terminal connection system before and after plasma etching. It is noteworthy to remark that hot fuming nitric acid is never used in the conventional opening method.

1) The top face of the module 10 of Fig. 1 is roughly polished using a metal grinding disk (granulometry 60 um, 300 rpm) and a conventional manual polisher, such as the PRESI Mecapol P 250, until the lead frame is reached. Preferably, this step must be monitored not to polish the top surface in excess that would destroy the terminal connection system. It is recommended to adjust planarity of the module top surface with respect to the disk during this polishing step. The resulting module is shown in Fig. 2(A).

2) The lead frame is then removed from the module 10 simply using a pair of tweezers. The resulting module is shown in Fig. 2(B)

3) The polishing is continued to remove the composite polymeric layer 14. The same metal grinding disk of step 1 is used to remove the KAPTON top layer 14b. The bottom polyimide layer 14a is preferably removed by a metal disk having a smaller granulometry e.g.. 9 um. This polishing step must be very carefully monitored and must be stopped before the protective passivating layer 18 is attacked. The resulting module is shown in Fig. 2(C). Because the encapsulation plastic resin 13 is much harder than the

This Sheet Has Been Replaced



polymeric material of layer 14, once the latter has been totally removed, it still remains a small quantity of the plastic resin 13 coating the central area of the chip which is detrimental to chip analysis, in particular because it prevents visual chip inspection. Micro-photograph of Fig. 3(A) illustrates the pad-shaped portion of the ball-shaped connection 20 embedded in a plastic resin coating which remains after the polishing steps.

4) The removal of this remaining plastic resin coating generally requires two sub-steps, a first relatively coarse polishing and a fine O2 plasma etching. The latter sub-step must be conducted in the shortest possible time, because inorganic materials are known to be sensitive to O2 plasmas.

In sub-step 4-1, the module top surface is softly polished with a cloth disk (gran. 6 um) and a polishing paste (Buehler Diamond ...) to remove the greatest part of this remaining plastic resin coating. Likewise, care must be exercised to avoid any scratch of the underlying passivating layer 18, to preserve chip functionality.

In sub-step 4-2, the top surface of the resulting module is submitted to plasma etching in an O2 ambient in a RIE etcher for isotropic etch. This step must be also carefully monitored. The etching time must be sufficient to remove all the remaining plastic resin coating but not too long to avoid damaging the said passivation layer 18. An adequate RIE system to perform this sub-step is the PLASSYS MDS 150. Major operating parameters are a power of 850 W and an O2 flow of 20 cc in two cycles of 30mn. Finally, the chip is rinsed in de-ionized water. As apparent from Fig. 2(D), at this stage of the process, the chip is still partially molded in the plastic resin which encapsulates the passive face and the sidewalls of the chip 11. The micro-photograph of Fig. 3(B) illustrates the pad-

This Sheet Has Been Replaced



shaped portion which remains bonded to the chip contact zone at this final stage of the process (when successfully completed).

This conventional opening method has some inconveniences. The polishing steps which aim to remove the polymeric layer 14 and at least partially, the remaining plastic resin coating must be very accurately controlled, to avoid destruction of the chip terminal connection system (whose integrity is required for testability) and the damaging of the passivating layer (for chip device functionality). In addition, according to this method, a plasma etching step is necessary requiring thereby an expensive Plasma RIE etcher. This plasma etching sub-step is relatively long (1 H processing time) and requires an accurate control, because the oxygen plasma is prone to attack the SiO2/Si3N4 chip passivation layer 18. As a matter of fact, it is impossible to remove all the remaining plastic resin coating in the central area, so that chip testability is always less than 10%. Moreover, it has been generally noticed detrimental contamination effects. Contamination arises because of the presence of the surrounding plastic which causes pollution of the RIE etcher internal walls, and subsequently will pollute the SEM tool as well. As a final result, the above described conventional opening method raises many concerns: results are operator dependent, success rate is low, sample preparation time is long and the terminal connection systems are often destroyed. Moreover, this method becomes more difficult when the size of the chips increases which means a predictable inefficiency of the subject method in the near future. Consequently, this conventional opening method is not satisfactory in many respects.

This Sheet Has Been Replaced



Objects of the invention

It is therefore a primary object of the present invention to provide a method for recovering bare semiconductor chips from plastic packaged modules which is not detrimental to the chip functionality and testability.

It is another object of the present invention to provide a method for recovering bare semiconductor chips from plastic packaged modules which permits complete removal of the plastic encapsulating resin.

It is another object of the present invention to provide a method for recovering bare semiconductor chips from plastic packaged modules which preserves the terminal connection system integrity.


It is another object of the present invention to provide a method for recovering bare semiconductor chips from plastic packaged modules which is applicable to any type of plastic encapsulating resin.

It is still another object of the present invention to provide a method for recovering bare semiconductor chips from plastic packaged modules which is rather simple and inexpensive.

It is another object of the present invention to provide a method for recovering bare semiconductor chips from plastic packaged modules which does not cause any contamination to the chip and processing/inspection equipments.

It is still another object of the present invention to provide a method for recovering bare semiconductor chips from plastic packaged modules which can be fully automated.

This Sheet Has Been Replaced



Summary of the present invention

The opening method of the present invention aims to recover undamaged bare silicon chips from plastic packaged modules wherein they are molded. For plastic packaged modules of the type where the chip has its contact zones wire-bonded to the conductors of a lead frame and is molded in a plastic encapsulating resin which is etch resistant to hot fuming nitric acid, said opening method basically includes the steps of:

1) polishing the module upside until the lead frame is exposed;

2) removing the lead frame;

3) roughly polishing the module backside until exposing the passive face of the silicon chip;

4) immersing the resulting module in hot fuming nitric acid at a temperature comprised between approximately 80 °C and 150°C for a time comprised between approximately 4 and 10 mn;

5) immediately cooling the resulting module to create a thermal shock whereby all the remaining portions of the plastic encapsulating resin are eliminated, leaving the desired bare silicon chip.

After possibly a final cleaning step, the chip is ready for analysis.

Optionally, should an electrical test be required, the ball-shaped connections may be in turn eliminated, by dipping the chip in a mercury bath to expose the chip contact zones.

This Sheet Has Been Replaced



In a preferred embodiment, the thermal shock is created by immersing the module in pure hot fuming nitric acid at 120°C for 8 mn and then cooling the module by blowing compressed air at the ambient temperature onto the chip.

The method of the present invention allows to remove the totality of the plastic encapsulating resin without damaging the chip and in particular its passivation layer, thereby preserving the chip functionality. Because, there is no longer any remaining plastic resin coating over the central area of the chip, chip testability is maximum (100%).


The novel features believed to be characteristic of this invention are set forth in the appended claims. The invention itself, however, as well as other objects and advantages thereof, may best be understood by reference to the following detailed description of an illustrated preferred embodiment to be read in conjunction with the accompanying drawings.

Brief Description of the drawings

Fig. 1 shows a conventional plastic packaged module of the SOJ (Small Outline J-Lead) model wherein a silicon chip is molded. Fig. 1 (A) shows a cutaway view of the plastic packaged module with a part of the plastic encapsulation removed, (B) shows a cross sectional view of the module, and (C) shows a schematic enlarged view at the vicinity of the chip terminal connection system.

Fig. 2 shows the module of Fig. 1 at different stages of the process according to a conventional method of the prior art for recovering the bare chip from the plastic packaged module.

This Sheet Has Been Replaced



Figs. 3(A) and (B) are micro-photographs showing enlarged views of the chip terminal connection system before and after the plasma etching step according to said conventional method.

Fig. 4 shows the module of Fig. 1 at different stages of the process according to a preferred embodiment of the method of the present invention.

Figs. 5(A) and (B) are micro-photographs showing enlarged views of the chip terminal connection system before and after the gold ball-shaped connection has been removed.

Description of the preferred embodiment

A preferred embodiment of the method of the present invention will be now described in conjunction with Fig. 4 which illustrates the different processing steps thereof.

1) The module referenced 10 is secured in a fixture which is manually held or is fixed to the arm of the polishing apparatus. The module is presented to the polishing disk being turned upside down. The top surface of the module 10 is polished on a revolving diamond metal disk having a granularity from 120 to 200 um (not critical) to remove the top of the plastic encapsulating resin 13. The polishing is continued until the metallic conductors 12 of the lead frame are exposed. Operating conditions are the same that those given above with respect to the conventional method. Fig. 4(A) illustrates the module 10 at this stage of the process.

2) As apparent from Fig. 4(B), the lead frame is removed as standard using tweezers. Optionally, the module top surface may be now submitted to a fine additional polishing step to remove traces of the glue beneath the lead frame.

This Sheet Has Been Replaced



Above steps 1 and 2 are quite identical to the corresponding steps of the conventional opening method described above. However, step 1 needs not to be carefully monitored. It doesn't care if the lead frame is damaged or not. As a matter of fact, it is even permitted to proceed down to the KAPTON sheet 14b (see Fig. 1).

3) Then, according to the teachings of the present invention, a rough polishing is accomplished on the backside of the module 10, using similar operating conditions as taught in step 1). A disk granularity of 120 um is adequate to remove the plastic encapsulating resin 13 until the passive face of the silicon chip 11 is exposed. Monitoring can be performed either automatically, e.g. by measuring the thickness of the remaining resin or by optical detection. At the end of step 3, the module is shown in Fig. 4(C).

4) Now, still according to the teachings of the present invention, the essential step of creating a thermal shock to the module is performed. This thermal shock is preferably accomplished in three successive heating, cooling and heating sub-steps.

According to sub-step 4-1, the module is immersed in a hot fuming pure nitric acid bath contained in a container disposed on a heating plate raised at a temperature of approximately 120°C. The duration of this sub-step is about 8mn. Although, in some instances, only heating may reveal to be sufficient, use of fuming nitric acid has demonstrated to be very efficient since it cooperates with heat to produce a total removal of the plastic resin 13 at the end of this step, as it will be explained now.

In sub-step 4-2, the heated module 10 is without delay submitted to a quick cooling. For instance, a compressed

This Sheet Has Been Replaced

gas e.g. air or a neutral gas, either cooled or at ambient temperature is blown over the module. At the end of sub-step 4-2, all or almost all the remaining plastic resin parts burst, just leaving the bare chip without any damage.

In sub-step 4-3, the chip is immersed once again in hot fuming nitric acid. This step is preferably conducted for a total removal of any plastic residues that could remain at this stage of the method. Temperature of the heating plate is still about 120°C and the duration approximately 3-4mm.

Finally, the bare chip is rinsed in de-ionized water, then cleaned by using a duplicating film dipped in acetone as standard. The chip is now ready for chip inspection/analysis. At this stage of the process, the bare chip is recovered undamaged as illustrated in Fig. 4(D). From the micro-photograph of Fig. 5(A), it is apparent that, contrarily to the above described conventional method, the chip terminal connection system is not deteriorated.

5) Should the chip testing be now required, the gold ball-shaped connections have to be removed. To that end, the chip 11 is laid-down (active face down) to float over an agitated a mercury bath, whose agitation is maintained during a limited period of time (e.g. for about 45 mn), so that the remaining portions of the gold wires 15 and ball-shaped connections 20 are not totally eliminated, just leaving a thin gold plated chip portion thereof exposed as apparent from the micro-photograph of Fig. 5(B). This step is highly desired to improve chip testability, because otherwise it would be really difficult to contact the remaining portion of the terminal connection system illustrated in Fig. 5(A) with a probe tip. On the contrary, it is very easy to apply the said probe tip on the exposed contact zone which is relatively flat and large.

This Sheet Has Been Replaced



Finally, the chip 11 is cleaned by using a duplicating film (acetylcellulose) as standard.

The method of the present invention, allows the removal of any type of plastic encapsulating resins as far as integrated circuit chips are passivated with SiO2 or Si3N4. The present method is not adapted to polyimide passivated chips. Modules that have been processed by the method of the present invention results in chips exhibiting a 100% functionality and testability. In particular, the chip contact zones have not been degraded and are ready for perfect electrical contact with the test probes. In addition, no physical or electrical degradation has been noticed as to the functionality of the chips. The opening method of the present invention reveals to be very useful as far as the recovered bare chips are used for examination/inspection or failure analysis purposes. However, it is also of great interest when the chips are recovered for re-use, possibly after having been repaired. With regard to the prior art method, the present method maintains the integrity of the chip terminal connection system. In addition, the chip is free of any contamination (no plastic residues). The present opening method is relatively simple, inexpensive (no RIE etcher required) and has demonstrated success rates as high as 100%.

The method of the present invention is applicable to plastic packaged modules of many types such as the Small Outline J-Lead (SOJ) packages, the Plastic Leaded Chip Carrier packages (PLCC), the Small Outline Package (SOP) and the like. The above opening method is also directly applicable to many other types of electronic components.

This Sheet Has Been Replaced

* C L M S *

CLAIMS

1. Method for recovering an undamaged bare semiconductor chip (11) from a plastic packaged module (10) of the type wherein the contact zones (19) of the chip are connected by a metal wire (15) bonded to the conductors (12) of a metallic lead frame and wherein the chip is molded in a plastic encapsulating resin (13) which is etch resistant to nitric fuming acid; said opening method including the steps of:

   a) polishing the module upside until the conductors of the lead frame are exposed;

   b) removing the lead frame;

   c) roughly polishing the module backside until the passive face of the silicon chip is approximately exposed;

   d) heating the resulting module to a temperature above approximately 80 °C without detrimentally affecting the chip functionality and for a determined period of time;

   e) immediately cooling the said resulting module to create a thermal shock whereby all the remaining portions of the plastic encapsulating resin are eliminated, leaving the desired bare silicon chip.

2. The method of claim 1 further including the step of:

   f) eliminating the wire at the vicinity of said chip contact zones.

This Sheet Has Been Replaced



* C L M S *

3. The method of claim 1 or 2 wherein said step d) of heating the resulting module consists of:

d1) immersing the module in a bath of hot fumic nitric acid raised at a temperature comprised between about 80 and about 150°C for a time comprised between about 4 and about 10 mn.

4. The method of claim 1,2 or 3 wherein said step e) of creating a thermal shock consists of:

e1) blowing compressed air at the temperature of the ambient.

5. The method of any above claim wherein step f) consists in dipping the chip in an agitated mercury bath for about 45 mn.

This Sheet Has Been Replaced

ABSTRACT

Method for recovering bare semiconductor chips from plastic packaged modules

Plastic package decapsulation is absolutely necessary in the electronic industry, in particular for construction and failure analysis of semiconductor chips molded in plastic packaged modules. The aim of opening methods is to recover the bare semiconductor chips undamaged. The problem is very acute when etch resistant plastic encapsulating resins are used as the molding material. The method of the present invention is more particularly directed to plastic packaged module (10) of the type wherein the contact zones of the chip (11) are connected by wire-bonding to lead conductors (12) and wherein the chip is molded in such etch resistant resins. The novel opening method includes the steps of: a) polishing the module (10) upside to eliminate the top part of the plastic encapsulating resin (13) until the conductors (12) of the lead frame are exposed; b) removing the lead frame; c) roughly polishing the module backside to eliminate the bottom part of the plastic encapsulating resin (13) until the passive face of the silicon chip (11) is exposed; d) immersing the resulting module in a hot fuming nitric acid bath raised to a temperature of about 120°C and for a time of about 8 mn; and, e) immediately cooling the said resulting module by blowing compressed air at the ambient temperature thereon to create a thermal shock whereby all the remaining parts of the plastic encapsulating resin (13) are eliminated, leaving the desired bare silicon chip without any damage.

Fig. 4

This Sheet Has Been Replaced



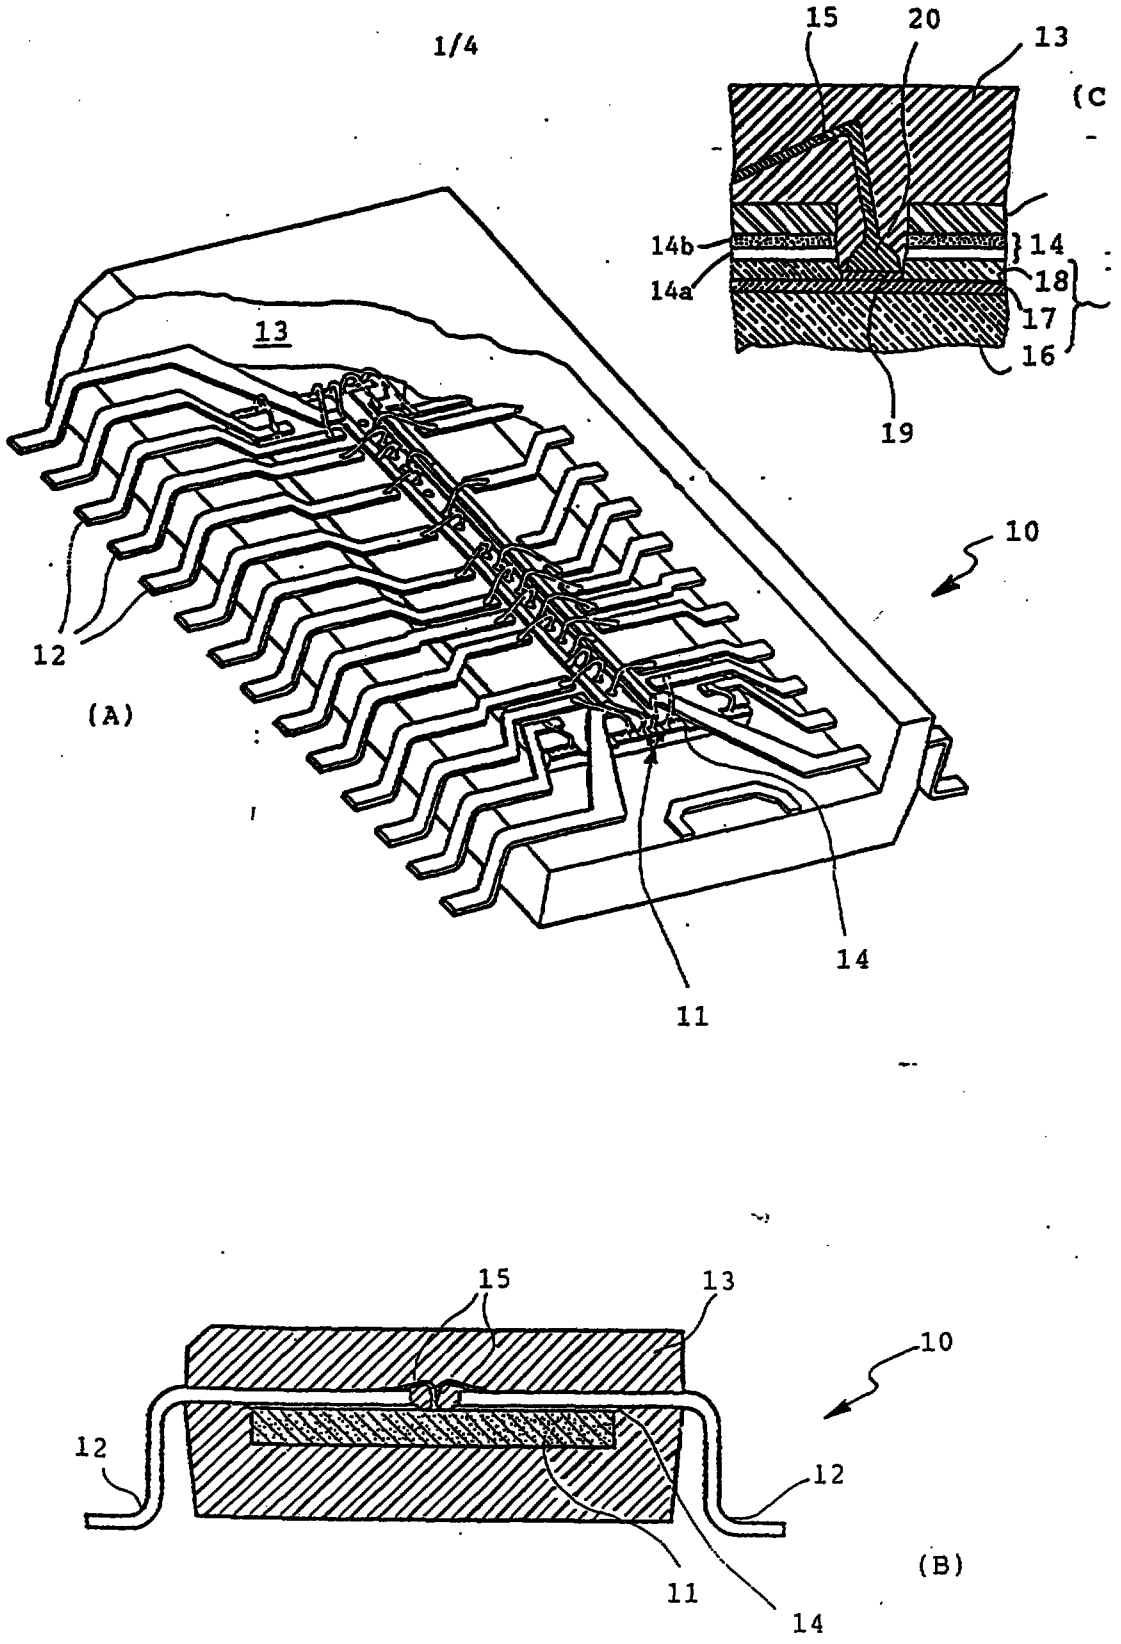


FIG.1
(PRIOR ART)



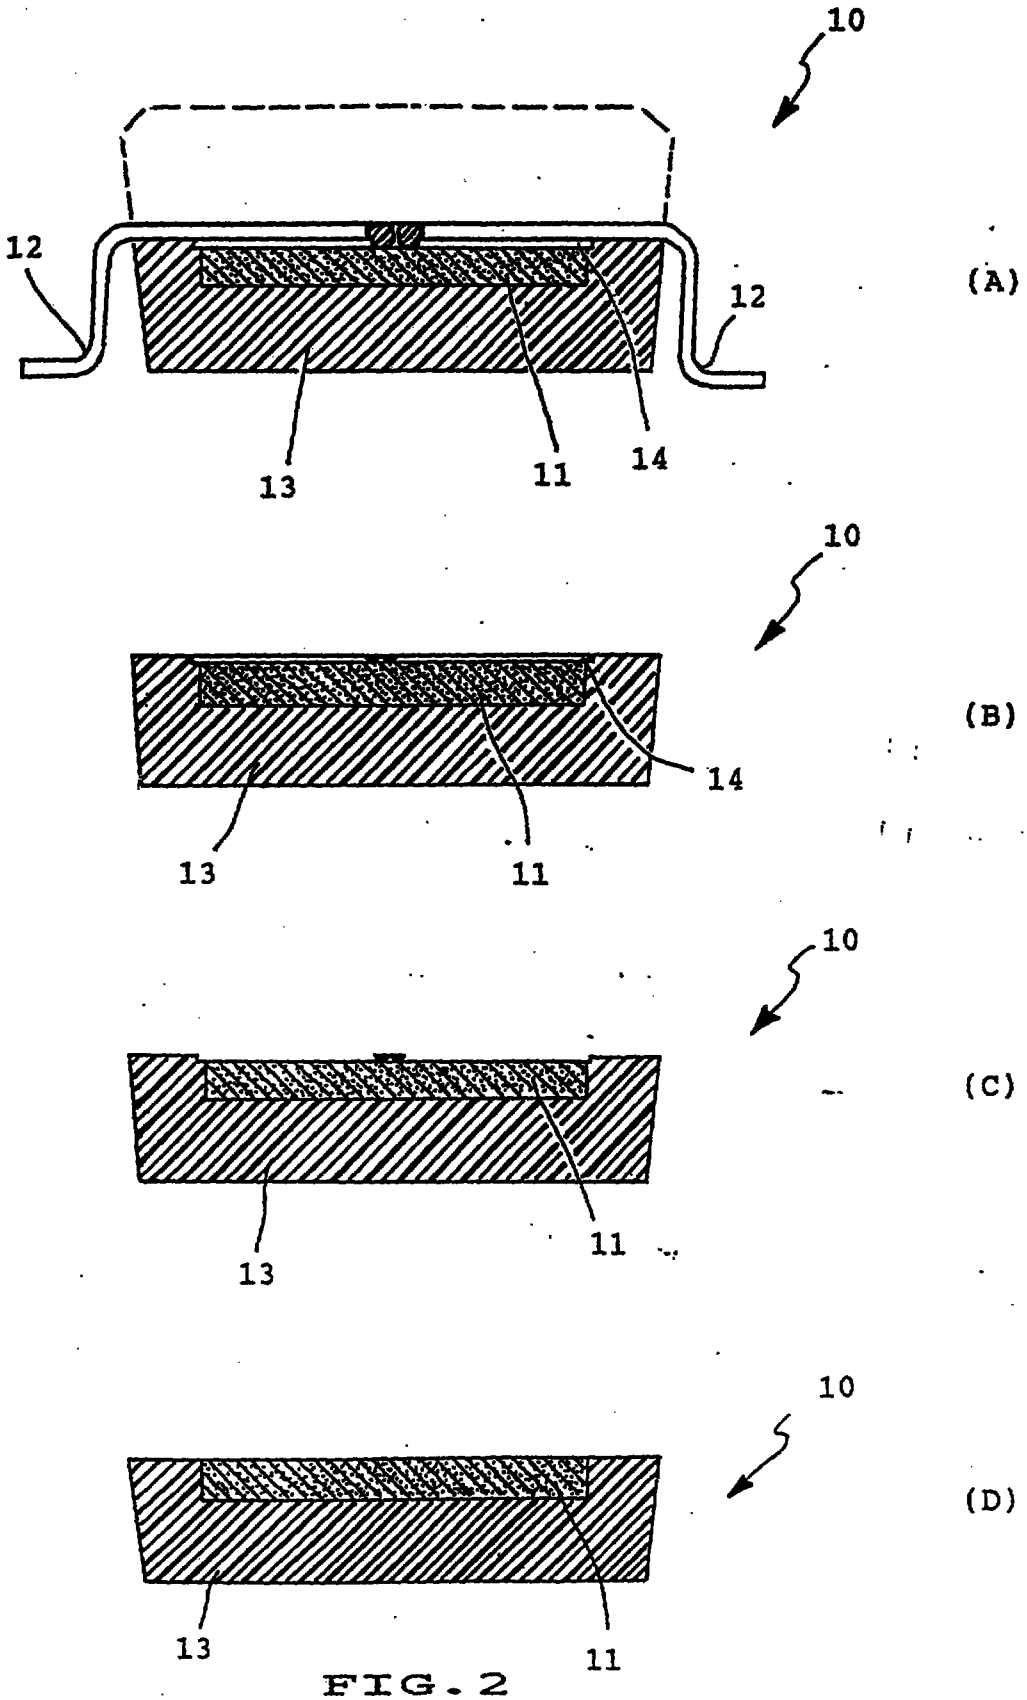


FIG. 2


(PRIOR ART)


10
12
12
(A)
13
11
14
10
(B)
13
11
14
10
13
13
(C)
11
10
(D)
11

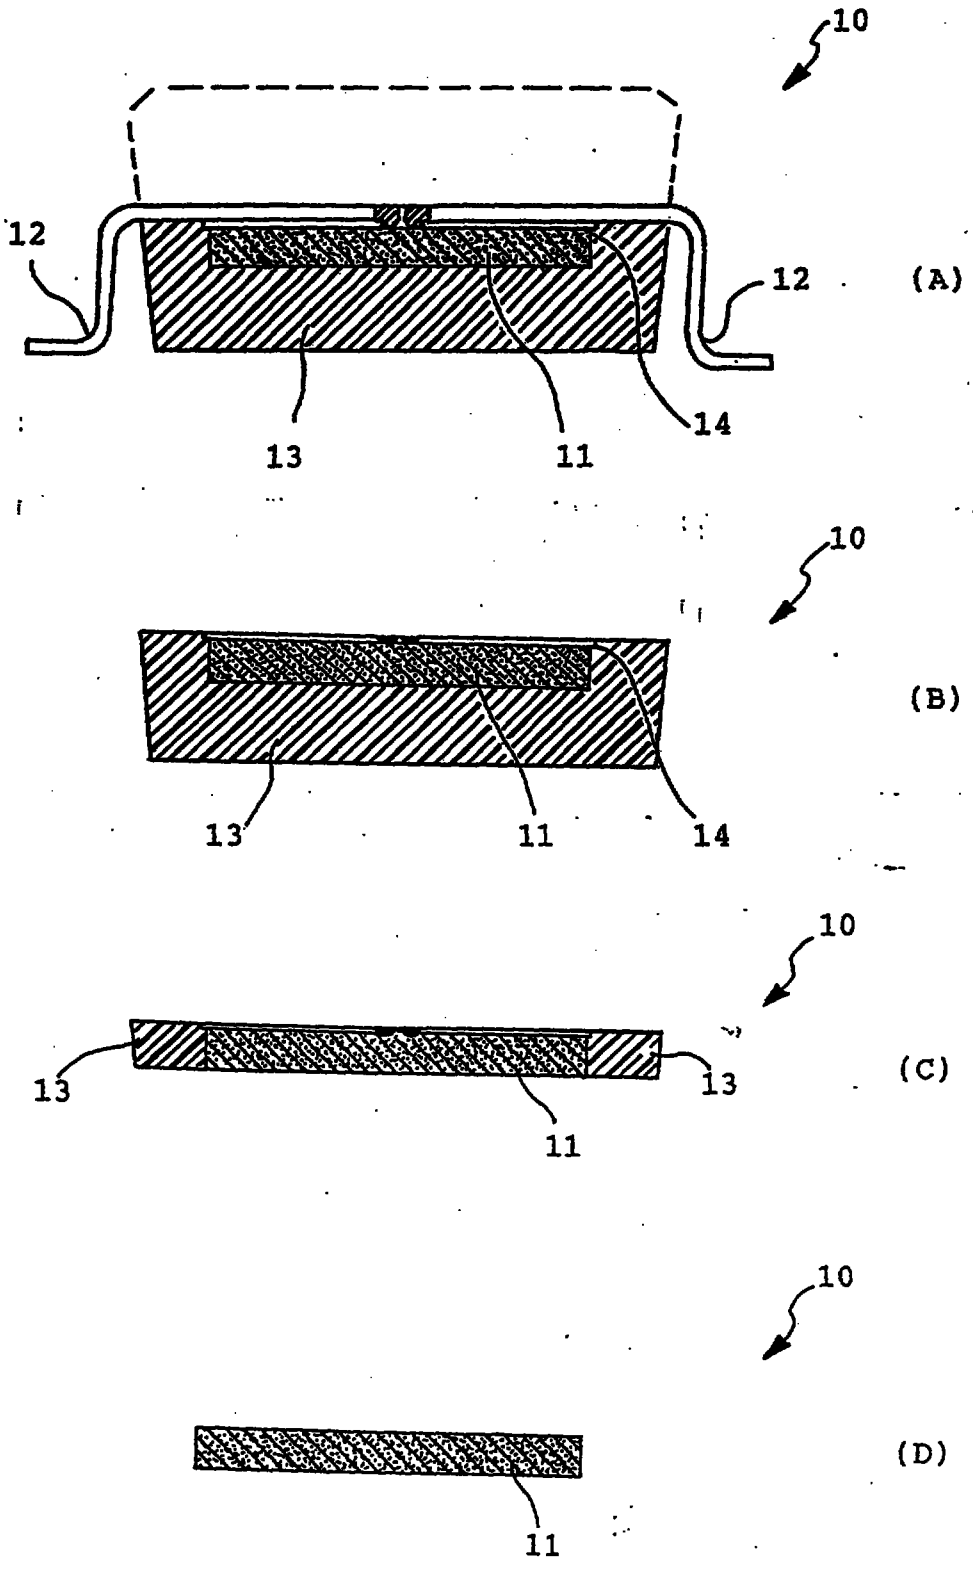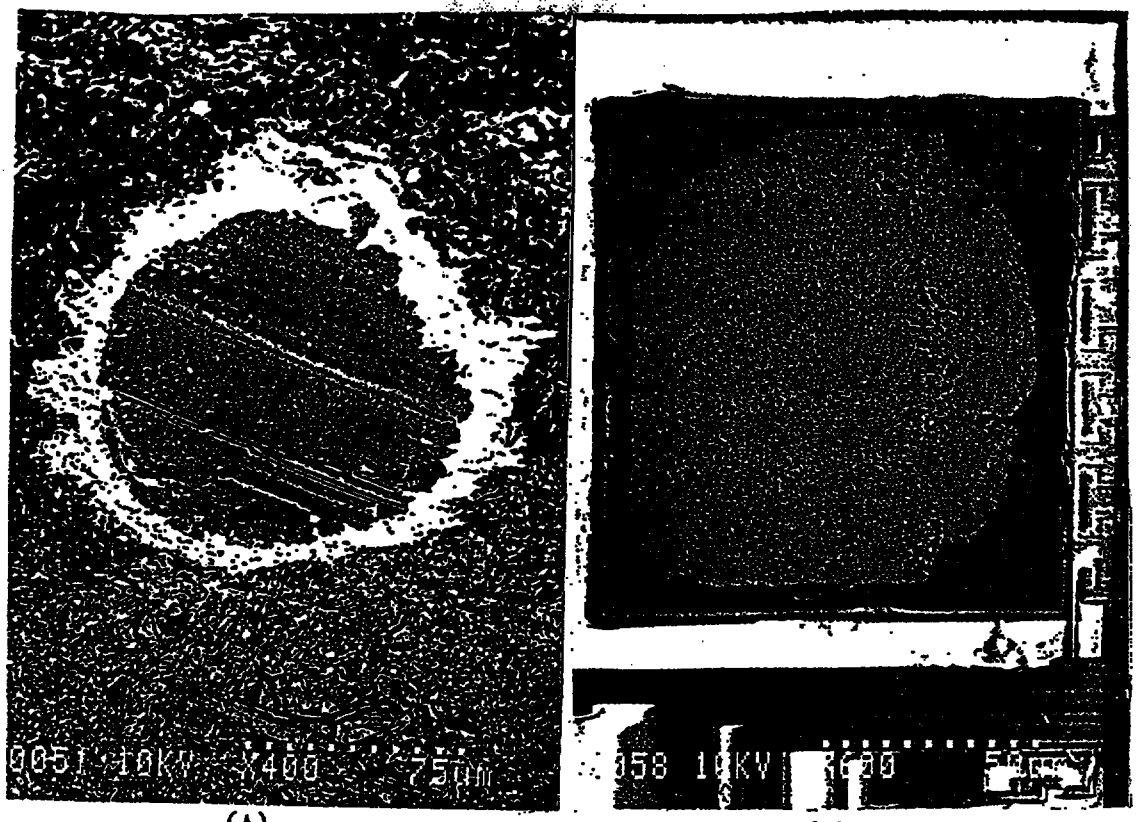

(A) (B)

FIG. 3

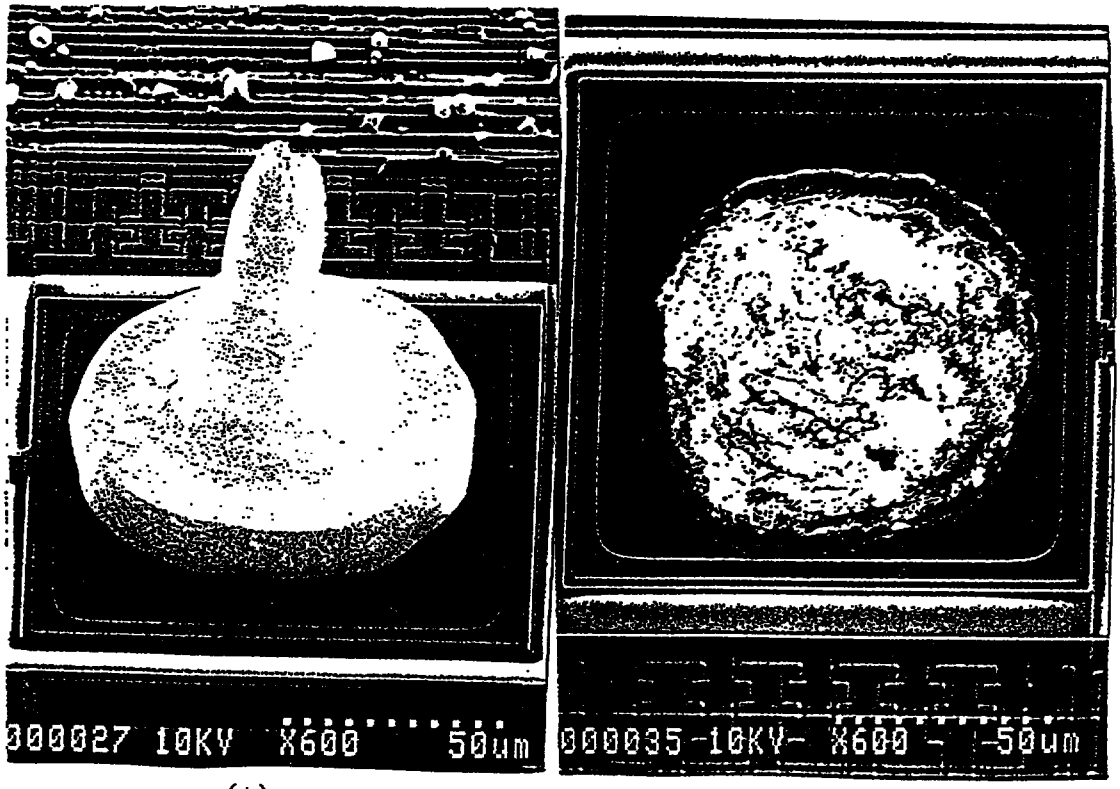

(A) (B)

FIG. 5

REPLACEMENT SHEET
03 MAY 1996

Method for recovering bare semiconductor chips from plastic packaged modules

Field of Invention

The present invention relates to plastic encapsulated semiconductor chips and more particularly to an opening method for recovering the bare semiconductor chips from the plastic packaged modules wherein the chip is encapsulated without any damage for the chip. As a result, the method allows to recover fully functional and testable chips for any purpose, e.g. for examination/inspection, analysis, or re-use (possibly after repair). The method of the present invention is applicable to any plastic packaged modules even when the semiconductor chip is molded in a plastic encapsulating resin which is resistant to known etching techniques.

Background of the Invention

Plastic package decapsulation (or depacking) is absolutely necessary for construction and failure analysis of plastic packaged components, typically semiconductor chips. Especially in the case of failure analysis, identification of the cause of a defective chip implies that the opening method keeps the full integrity of the devices integrated in the chip and of the metallic interconnections as well. Likewise, it is often necessary to physically evaluate VLSI devices for the purpose of product reliability, validation of physical design and identification of device structural patterns. Finally, at the present time, high volume supplies of verifiable bare chips are spotty in the merchant market since some suppliers will not even sell

REPLACED SHEETS SG
☑ Description : paged 8 to paged 10
☑ Claim(s) : paged 15 to paged 16
☐ Drawing(s) : paged — to paged —
☑ Abstract : paged 17 to paged —

REPLACEMENT SHEETS SG
☑ Description : paged 1 to paged 14
☑ Claim(s) : paged 15 to paged 16
☐ Drawing(s) : paged — to paged —
☑ Abstract : paged 17 to paged —
DATE OF RECEIPT 3 MAY 1996

bare chips. This situation has forced some module manufacturers to purchase packaged chips and to remove the chips for re-use at considerably increased costs. Bare chip quality is the major issue of these module manufacturers, because they do not want to find themselves recovering chips not fully functional for re-use. As a result, in addition to functionality aspects, chip testability is also an essential concern, because the opening method must not only let the chip functional but also in good conditions for the test. Therefore, the base problem to be solved is to develop a reliable method to open plastic packaged modules to recover the bare semiconductor (typically silicon) chip enclosed therein without altering its physical and electrical integrity.

Wet chemical methods using hot fuming nitric acid are extensively used with silicon nitride (Si3N4) and/or silicon oxide (SiO2) passivated silicon chips. When the silicon chip is passivated with polyimide, these methods are inoperative because nitric acid damages the polyimide material and thus does not preserve chip functionality (in case of polyimide passivation only manual polishing is used). A more specific problem recently emerges with SiO2/Si3N4 passivated silicon chips, when very hard, etch resistant plastic resins are used as the molding compound to encapsulate the chip. For instance, the TOSHIBA KE 2000H plastic resin belongs to this category. This plastic resin has outstanding properties in terms of hermeticity, reliability, and purity (absence of contaminants). Unfortunately, its complete removal of this plastic resin without damaging the encapsulated chip revealed to be a very difficult task because it is totally unattackable by any acid including hot fuming nitric acid.

Fig. 1 shows a conventional plastic packaged module of the SOJ (Small Outline J-Lead) model wherein a silicon chip is molded. Fig. 1 (A) shows a cutaway view of the plastic

REPLACEMENT SHEET
03 MAY 1996

packaged module with a part of the plastic encapsulation removed, (B) shows a cross sectional view of the module, and (C) shows a schematic enlarged view at the vicinity of the chip terminal connection system. Now turning to Fig. 1 there is shown a conventional plastic packaged module 10 incorporating a silicon chip 11 whose active surface is mounted side-up. The packaged module 10 has a plurality of lead frame conductors 12 extending through the plastic encapsulating resin 13 which are adhesively joined to the silicon chip 11, preferably by means of a composite polymeric layer 14. Typically, this composite layer consists of a sandwich formed by a bottom polyimide polymeric layer 14a glued to an alpha barrier layer 14b. The alpha barrier layer is a film of a polymer material having a melting temperature above 175°C and does not contain ionizable species. One such polymer material that can be used as an alpha barrier is KAPTON (a trademark of DuPont). A 30 um diameter gold wire 15 is thermosonically bonded between each conductor of the lead frame and the contact zone of the chip. In addition, this composite polymeric layer 14 may reveal to be useful should the lead frame conductors dissipate excess heat that could damage the chip.

A more detailed construction at the vicinity of the terminal connection system where the gold wire 15 is attached to the chip 11 is shown in the enlarged view (C) of Fig. 1. Now turning to Fig. 1(C), there is illustrated a standard silicon chip 11 consisting of a silicon substrate 16 (wherein active/passive devices are formed) up to the phosphosilicate glass (PSG) insulating layer including the tungsten studs (not shown). The first metallization level (M1) is represented by land 17. A passivating layer 18 is formed thereon. Typically, according to the scope of the present invention, this passivating layer 18 is made of an inorganic material such as silicon nitride Si3N4 and/or silicon dioxide SiO2, as known for those skilled in the

REPLACEMENT SHEET
03 MAY 1996

art. The passivation layer 18 is provided with an opening or via-hole. The second level of metallization (M2) is formed in this via-hole and result in a contact zone 19 where the gold wire 15 is bonded. For instance, according to an advanced CMOS technology used to manufacture 16 Mbits DRAM chips, the first and second metallization levels consist of a composite metallurgy: Ti-AlCuSi-TiN-Si and Ti-AlCuSi-TiN respectively. The other end of the gold wire 15 is bonded to one of the inner lead or conductor 12 of the leadframe (not shown). When the gold wire 15 is thermosonically bonded to the chip contact zone 19, there is formed a ball-shaped connection 20 which is made apparent from the enlarged view (C) of Fig. 1.

In the preferred embodiment of Fig. 1, the chip contact zones 19 are located along a center area of the chip 11 along the longitudinal axis. As such, the plastic packaged module 10 of Fig. 1, is very attractive in many respects. In addition to its role of serving as an alpha barrier, the composite polymeric layer 14 cooperates with conductors 12 (which cover a substantial portion of the chip surface) to facilitate the dissipation of heat generated by the chip. Moreover, the short connecting wires 15 contribute to faster chip response. This particular chip/packaging combined technology is described and claimed in commonly assigned US patents 4 796 098 and 4 862 245. This technology is extensively used for the packaging of 1, 4 and 16 Mbits DRAM chips (in this latter case, the central area containing the chip contact zones is transverse instead of being longitudinal as illustrated in Fig. 1) and is currently designated under the brand name of A-wire (A stands for Area-window).

Description of a Method of the Prior Art

The different processing steps of a conventional opening method that is capable to remove hard molding resins, such

REPLACEMENT SHEET
03 MAY 1996

as the TOSHIBA KE 2000H (which is extensively used for the encapsulation of the advanced semiconductor memory products mentioned above), will now be described in conjunction with Figs. 2 and 3.

Fig. 2 illustrates the module 10 of Fig. 1 at various stages of the opening method. Figs. 3(A) and 3(B) are microphotographs showing enlarged views at the vicinity of the chip terminal connection system before and after plasma etching. It is noteworthy to remark that hot fuming nitric acid is never used in the conventional opening method.

1) The top face of the module 10 of Fig. 1 is roughly polished using a metal grinding disk (granulometry 60 um, 300 rpm) and a conventional manual polisher, such as the PRESI Mecapol P 250, until the lead frame is reached. Preferably, this step must be monitored not to polish the top surface in excess that would destroy the terminal connection system. It is recommended to adjust planarity of the module top surface with respect to the disk during this polishing step. The resulting module is shown in Fig. 2(A).

2) The lead frame is then removed from the module 10 simply using a pair of tweezers. The resulting module is shown in Fig. 2(B)

3) The polishing is continued to remove the composite polymeric layer 14. The same metal grinding disk of step 1 is used to remove the KAPTON top layer 14b. The bottom polyimide layer 14a is preferably removed by a metal disk having a smaller granulometry e.g.. 9 um. This polishing step must be very carefully monitored and must be stopped before the protective passivating layer 18 is attacked. The resulting module is shown in Fig. 2(C). Because the encapsulation plastic resin 13 is much harder than the

REPLACEMENT SHEET
03 MAY 1996

polymeric material of layer 14, once the latter has been totally removed, it still remains a small quantity of the plastic resin 13 coating the central area of the chip which is detrimental to chip analysis, in particular because it prevents visual chip inspection. Micro-photograph of Fig. 3(A) illustrates the pad-shaped portion of the ball-shaped connection 20 embedded in a plastic resin coating which remains after the polishing steps.

4) The removal of this remaining plastic resin coating generally requires two sub-steps, a first relatively coarse polishing and a fine O2 plasma etching. The latter sub-step must be conducted in the shortest possible time, because inorganic materials are known to be sensitive to O2 plasmas.

In sub-step 4-1, the module top surface is softly polished with a cloth disk (gran. 6 um) and a polishing paste (Buehler Diamond ...) to remove the greatest part of this remaining plastic resin coating. Likewise, care must be exercised to avoid any scratch of the underlying passivating layer 18, to preserve chip functionality.

In sub-step 4-2, the top surface of the resulting module is submitted to plasma etching in an O2 ambient in a RIE etcher for isotropic etch. This step must be also carefully monitored. The etching time must be sufficient to remove all the remaining plastic resin coating but not too long to avoid damaging the said passivation layer 18. An adequate RIE system to perform this sub-step is the PLASSYS MDS 150. Major operating parameters are a power of 850 W and an O2 flow of 20 cc in two cycles of 30mn. Finally, the chip is rinsed in de-ionized water. As apparent from Fig. 2(D), at this stage of the process, the chip is still partially molded in the plastic resin which encapsulates the passive face and the sidewalls of the chip 11. The micro-photograph of Fig. 3(B) illustrates the pad-

REPLACEMENT SHEET
03 MAY 1996

shaped portion which remains bonded to the chip contact zone at this final stage of the process (when successfully completed).

This conventional opening method has some inconveniences. The polishing steps which aim to remove the polymeric layer 14 and at least partially, the remaining plastic resin coating must be very accurately controlled, to avoid destruction of the chip terminal connection system (whose integrity is required for testability) and the damaging of the passivating layer (for chip device functionality). In addition, according to this method, a plasma etching step is necessary requiring thereby an expensive Plasma RIE etcher. This plasma etching sub-step is relatively long (1 H processing time) and requires an accurate control, because the oxygen plasma is prone to attack the SiO2/Si3N4 chip passivation layer 18. As a matter of fact, it is impossible to remove all the remaining plastic resin coating in the central area, so that chip testability is always less than 10%. Moreover, it has been generally noticed detrimental contamination effects. Contamination arises because of the presence of the surrounding plastic which causes pollution of the RIE etcher internal walls, and subsequently will pollute the SEM tool as well. As a final result, the above described conventional opening method raises many concerns: results are operator dependent, success rate is low, sample preparation time is long and the terminal connection systems are often destroyed. Moreover, this method becomes more difficult when the size of the chips increases which means a predictable inefficiency of the subject method in the near future. Consequently, this conventional opening method is not satisfactory in many respects.

REPLACEMENT SHEET
03 MAY 1996

This Sheet Has Been Replaced

Objects of the invention

It is therefore a primary object of the present invention to provide a method for recovering bare semiconductor chips from plastic packaged modules which is not detrimental to the chip functionality and testability.

It is another object of the present invention to provide a method for recovering bare semiconductor chips from plastic packaged modules which permits complete removal of the plastic encapsulating resin.

It is another object of the present invention to provide a method for recovering bare semiconductor chips from plastic packaged modules which preserves the terminal connection system integrity.

It is another object of the present invention to provide a method for recovering bare semiconductor chips from plastic packaged modules which is applicable to any type of plastic encapsulating resin.

It is still another object of the present invention to provide a method for recovering bare semiconductor chips from plastic packaged modules which is rather simple and inexpensive.

It is another object of the present invention to provide a method for recovering bare semiconductor chips from plastic packaged modules which does not cause any contamination to the chip and processing/inspection equipments.

It is still another object of the present invention to provide a method for recovering bare semiconductor chips from plastic packaged modules which can be fully automated.

REPLACEMENT SHEET
03 MAY 1996

This Sheet Has Been Replaced

Summary of the present invention

The opening method of the present invention aims to recover undamaged bare silicon chips from plastic packaged modules wherein they are molded. For plastic packaged modules of the type where the chip has its contact zones wire-bonded to the conductors of a lead frame and is molded in a plastic encapsulating resin which is etch resistant to hot fuming nitric acid, said opening method basically includes the steps of:

1) polishing the module upside until the lead frame is exposed;

2) removing the lead frame;

3) roughly polishing the module backside until exposing the passive face of the silicon chip;

4) immersing the resulting module in hot fuming nitric acid at a temperature comprised between approximately 80 °C and 150°C for a time comprised between approximately 4 and 10 mn;

5) immediately cooling the resulting module to create a thermal shock whereby all the remaining portions of the plastic encapsulating resin are eliminated, leaving the desired bare silicon chip.

After possibly a final cleaning step, the chip is ready for analysis.

Optionally, should an electrical test be required, the ball-shaped connections may be in turn eliminated, by dipping the chip in a mercury bath to expose the chip contact zones.

REPLACEMENT SHEET
03 MAY 1996

This Sheet Has Been Replaced

In a preferred embodiment, the thermal shock is created by immersing the module in pure hot fuming nitric acid at 120°C for 8 mn and then cooling the module by blowing compressed air at the ambient temperature onto the chip.

The method of the present invention allows to remove the totality of the plastic encapsulating resin without damaging the chip and in particular its passivation layer, thereby preserving the chip functionality. Because, there is no longer any remaining plastic resin coating over the central area of the chip, chip testability is maximum (100%).

The novel features believed to be characteristic of this invention are set forth in the appended claims. The invention itself, however, as well as other objects and advantages thereof, may best be understood by reference to the following detailed description of an illustrated preferred embodiment to be read in conjunction with the accompanying drawings.

Brief Description of the drawings

Fig. 1 shows a conventional plastic packaged module of the SOJ (Small Outline J-Lead) model wherein a silicon chip is molded. Fig. 1 (A) shows a cutaway view of the plastic packaged module with a part of the plastic encapsulation removed, (B) shows a cross sectional view of the module, and (C) shows a schematic enlarged view at the vicinity of the chip terminal connection system.

Fig. 2 shows the module of Fig. 1 at different stages of the process according to a conventional method of the prior art for recovering the bare chip from the plastic packaged module.

REPLACEMENT SHEET
03 MAY 1996

Figs. 3(A) and (B) are micro-photographs showing enlarged views of the chip terminal connection system before and after the plasma etching step according to said conventional method.

Fig. 4 shows the module of Fig. 1 at different stages of the process according to a preferred embodiment of the method of the present invention.

Figs. 5(A) and (B) are micro-photographs showing enlarged views of the chip terminal connection system before and after the gold ball-shaped connection has been removed.

Description of the preferred embodiment

A preferred embodiment of the method of the present invention will be now described in conjunction with Fig. 4 which illustrates the different processing steps thereof.

1) The module referenced 10 is secured in a fixture which is manually held or is fixed to the arm of the polishing apparatus. The module is presented to the polishing disk being turned upside down. The top surface of the module 10 is polished on a revolving diamond metal disk having a granularity from 120 to 200 um (not critical) to remove the top of the plastic encapsulating resin 13. The polishing is continued until the metallic conductors 12 of the lead frame are exposed. Operating conditions are the same that those given above with respect to the conventional method. Fig. 4(A) illustrates the module 10 at this stage of the process.

2) As apparent from Fig. 4(B), the lead frame is removed as standard using tweezers. Optionally, the module top surface may be now submitted to a fine additional polishing step to remove traces of the glue beneath the lead frame.

REPLACEMENT SHEET
03 MAY 1996

Above steps 1 and 2 are quite identical to the corresponding steps of the conventional opening method described above. However, step 1 needs not to be carefully monitored. It doesn't care if the lead frame is damaged or not. As a matter of fact, it is even permitted to proceed down to the KAPTON sheet 14b (see Fig. 1).

3) Then, according to the teachings of the present invention, a rough polishing is accomplished on the backside of the module 10, using similar operating conditions as taught in step 1). A disk granularity of 120 um is adequate to remove the plastic encapsulating resin 13 until the passive face of the silicon chip 11 is exposed. Monitoring can be performed either automatically, e.g. by measuring the thickness of the remaining resin or by optical detection. At the end of step 3, the module is shown in Fig. 4(C).

4) Now, still according to the teachings of the present invention, the essential step of creating a thermal shock to the module is performed. This thermal shock is preferably accomplished in three successive heating, cooling and heating sub-steps.

According to sub-step 4-1, the module is immersed in a hot fuming pure nitric acid bath contained in a container disposed on a heating plate raised at a temperature of approximately 120°C. The duration of this sub-step is about 8mn. Although, in some instances, only heating may reveal to be sufficient, use of fuming nitric acid has demonstrated to be very efficient since it cooperates with heat to produce a total removal of the plastic resin 13 at the end of this step, as it will be explained now.

In sub-step 4-2, the heated module 10 is without delay submitted to a quick cooling. For instance, a compressed

REPLACEMENT SHEET
03 MAY 1996

gas e.g. air or a neutral gas, either cooled or at ambient temperature is blown over the module. At the end of sub-step 4-2, all or almost all the remaining plastic resin parts burst, just leaving the bare chip without any damage.

In sub-step 4-3, the chip is immersed once again in hot fuming nitric acid. This step is preferably conducted for a total removal of any plastic residues that could remain at this stage of the method. Temperature of the heating plate is still about 120°C and the duration approximately 3-4mm.

Finally, the bare chip is rinsed in de-ionized water, then cleaned by using a duplicating film dipped in acetone as standard. The chip is now ready for chip inspection/analysis. At this stage of the process, the bare chip is recovered undamaged as illustrated in Fig. 4(D). From the micro-photograph of Fig. 5(A), it is apparent that, contrarily to the above described conventional method, the chip terminal connection system is not deteriorated.

5) Should the chip testing be now required, the gold ball-shaped connections have to be removed. To that end, the chip 11 is laid-down (active face down) to float over an agitated a mercury bath, whose agitation is maintained during a limited period of time (e.g. for about 45 mn), so that the remaining portions of the gold wires 15 and ball-shaped connections 20 are not totally eliminated, just leaving a thin gold plated chip portion thereof exposed as apparent from the micro-photograph of Fig. 5(B). This step is highly desired to improve chip testability, because otherwise it would be really difficult to contact the remaining portion of the terminal connection system illustrated in Fig. 5(A) with a probe tip. On the contrary, it is very easy to apply the said probe tip on the exposed contact zone which is relatively flat and large.

REPLACEMENT SHEET
03 MAY 1996

Finally, the chip 11 is cleaned by using a duplicating film (acetylcellulose) as standard.

The method of the present invention, allows the removal of any type of plastic encapsulating resins as far as integrated circuit chips are passivated with SiO2 or Si3N4. The present method is not adapted to polyimide passivated chips. Modules that have been processed by the method of the present invention results in chips exhibiting a 100% functionality and testability. In particular, the chip contact zones have not been degraded and are ready for perfect electrical contact with the test probes. In addition, no physical or electrical degradation has been noticed as to the functionality of the chips. The opening method of the present invention reveals to be very useful as far as the recovered bare chips are used for examination/inspection or failure analysis purposes. However, it is also of great interest when the chips are recovered for re-use, possibly after having been repaired. With regard to the prior art method, the present method maintains the integrity of the chip terminal connection system. In addition, the chip is free of any contamination (no plastic residues). The present opening method is relatively simple, inexpensive (no RIE etcher required) and has demonstrated success rates as high as 100%.

The method of the present invention is applicable to plastic packaged modules of many types such as the Small Outline J-Lead (SOJ) packages, the Plastic Leaded Chip Carrier packages (PLCC), the Small Outline Package (SOP) and the like. The above opening method is also directly applicable to many other types of electronic components.

REPLACEMENT SHEET
03 MAY 1996

CLAIMS

1. Method for recovering an undamaged bare semiconductor chip (11) from a plastic packaged module (10) of the type wherein the contact zones (19) of the chip are connected by a metal wire (15) bonded to the conductors (12) of a metallic lead frame and wherein the chip is molded in a plastic encapsulating resin (13) which is etch resistant to nitric fuming acid; said opening method including the steps of:

a) polishing the module upside until the conductors of the lead frame are exposed;

b) removing the lead frame;

c) roughly polishing the module backside until the passive face of the silicon chip is approximately exposed;

d) heating the resulting module to a temperature above approximately 80 °C without detrimentally affecting the chip functionality and for a determined period of time;

e) immediately cooling the said resulting module to create a thermal shock whereby all the remaining portions of the plastic encapsulating resin are eliminated, leaving the desired bare silicon chip.

2. The method of claim 1 further including the step of:

f) eliminating the wire at the vicinity of said chip contact zones.

REPLACEMENT SHEET
03 MAY 1996

This Sheet Has Been Replaced

* C L M S *

3. The method of claim 1 or 2 wherein said step d) of heating the resulting module consists of:

d1) immersing the module in a bath of hot fumic nitric acid raised at a temperature comprised between about 80 and about 150°C for a time comprised between about 4 and about 10 mn.

4. The method of claim 1,2 or 3 wherein said step e) of creating a thermal shock consists of:

e1) blowing compressed air at the temperature of the ambient.

5. The method of any above claim wherein step f) consists in dipping the chip in an agitated mercury bath for about 45 mn.

REPLACEMENT SHEET
03 MAY 1996

This Sheet Has Been Replaced

METHOD FOR RECOVERING BARE SEMICONDUCTOR CHIPS FROM PLASTIC PACKAGED MODULES

ABSTRACT

The aim of opening methods is to recover the bare semiconductor chips undamaged. The method of the present invention is more particularly directed to plastic packaged module (10) of the type wherein the contact zones of the chip (11) are connected by wire-bonding to lead conductors (12) and wherein the chip is molded in such etch resistant resins. The opening method includes the steps of: a) polishing the module (10) upside to eliminate the tip part of the plastic encapsulating resin (13) until the conductors (12) of the lead frame are exposed; b) removing the lead frame; c) roughly polishing the module backside to eliminate the bottom part of the plastic encapsulating resin (13) until the passive face of the silicon chip (11) is exposed; d) immersing the resulting module in a hot fuming nitric acid bath raised to a temperature of about 120°C and for a time of about 8 mn; and, e) immediately cooling the said resulting module.

Fig. 4

REPLACEMENT SHEET
03 MAY 1996

This Sheet Has Been Replaced

REPLACEMENT SHEET
12 JUL 1997

REPLACEMENT SHEETS SG
☑ Description : paged 8 to paged 10
☑ Claim(s) : paged 15 to paged 19
☐ Drawing(s) : paged — to paged —
☐ Abstract : paged 20 to paged —
DATE OF RECEIPT 12 JUL 1997

SUMMARY OF THE PRESENT INVENTION

It is an object of the present invention to ameliorate one or more disadvantages of the prior art.

According to one aspect of the invention there is disclosed a method for recovering an undamaged bare semiconductor chip from a plastic packaged module, the plastic packaged module molded of a plastic encapsulating resin which is etch resistant to fuming nitric acid and having a plurality of lead frame conductors, the chip having an active surface facing a first side of the plastic packaged module and a passive surface facing an opposing second side of the plastic packaged module, the active surface having a plurality of contact zones connected by a metal wire to the lead frame conductors, the recovering method comprising the steps of: a) polishing the first side of the plastic packaged module until the lead frame conductors are exposed; b) removing the lead frame conductors; c) polishing the second opposing side of the plastic packaged module until the passive surface of the semiconductor chip is exposed, leaving a polished module; d) heating the polished module to a temperature above approximately 80°C. without detrimentally affecting the semiconductor chip functionality and leaving a heated module; and e) cooling the heated module to create a thermal shock so that all the remaining portions of the plastic encapsulating resin are eliminated, leaving the desired bare semiconductor chip.

According to another aspect of the invention there is disclosed a method for recovering an undamaged bare semiconductor chip from a plastic packaged module, the plastic packaged module molded of a plastic encapsulating resin which is etch resistant to fuming nitric acid and having a plurality of lead frame conductors, the chip having an active surface facing a first side of the plastic packaged module and a passive surface

facing an opposing second side of the plastic packaged module, the active surface having a plurality of contact zones connected by a metal wire to the lead frame conductors, the recovering method comprising the steps of: a) polishing the second opposing side of the plastic packaged module until the passive surface of the semiconductor chip is exposed; b) polishing the first side of the plastic packaged module until the lead frame conductors are exposed, leaving a polished module; c) removing the lead frame conductors; d) heating the polished module to a temperature above approximately 80°C. without detrimentally affecting the semiconductor chip functionality and leaving a heated module; and e) cooling the heated module to create a thermal shock so that all the remaining portions of the plastic encapsulating resin are eliminated, leaving the desired bare semiconductor chip.

The novel features believed to be characteristic of this invention are set forth in the appended claims. The invention itself, however, as well as other objects and advantages thereof, may best be understood by reference to the following detailed description of an illustrated preferred embodiment to be read in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a conventional plastic packaged module of the SOJ (Small Outline J-Lead) model wherein a silicon chip is molded. Fig. 1 (A) shows a cutaway view of the plastic packaged module with a part of the plastic encapsulation removed, (B) shows a cross sectional view of the module, and (C) shows a schematic enlarged view at the vicinity of the chip terminal connection system.

REPLACEMENT SHEET
12 JUL 1997

Fig. 2 shows the module of Fig. 1 at different stages of the process according to a conventional method of the prior art for recovering the bare chip from the plastic packaged module.

REPLACEMENT SHEET
12 JUL 1997

* C L M S *

CLAIMS

1. A method for recovering an undamaged bare semiconductor chip from a plastic packaged module, the plastic packaged module molded of a plastic encapsulating resin which is etch resistant to fuming nitric acid and having a plurality of lead frame conductors, the chip having an active surface facing a first side of the plastic packaged module and a passive surface facing an opposing second side of the plastic packaged module, the active surface having a plurality of contact zones connected by a metal wire to the lead frame conductors, the recovering method comprising the steps of:

a) polishing the first side of the plastic packaged module until the lead frame conductors are exposed;

b) removing the lead frame conductors;

c) polishing the second opposing side of the plastic packaged module until the passive surface of the semiconductor chip is exposed, leaving a polished module;

d) heating the polished module to a temperature above approximately 80°C. without detrimentally affecting the semiconductor chip functionality and leaving a heated module; and

e) cooling the heated module to create a thermal shock so that all the remaining portions of the plastic encapsulating resin are eliminated, leaving the desired bare semiconductor chip.

2. The method of claim 1 further including the step of:

f) eliminating the wire at the vicinity of the semiconductor chip contact zones.

3. The method of claim 1 wherein said step d) of heating the polished module comprises immersing the polished module in a bath of hot fuming nitric acid raised to a temperature between about 80°C. and about 150°C. for a time between about 4 minutes and about 10 minutes.

4. The method of claim 1 wherein step e) comprises blowing compressed ambient temperature air onto the semiconductor chip.

REPLACEMENT SHEET
12 JUL 1997



5. The method of claim 2 wherein step f) comprises dipping the semiconductor chip in an agitated mercury bath for about 45 minutes.

6. The method of claim 1 wherein:

step d) comprises immersing the polished module in a bath of hot fuming nitric acid raised to a temperature between about 80°C. and 150°C. for a time between about 4 minutes and about 10 minutes; and

step e) comprises blowing compressed ambient temperature air onto the semiconductor chip.

7. The method of claim 2 wherein said step d) of heating the polished module comprises immersing the polished module in a bath of hot fuming nitric acid raised to a temperature between about 80°C. and about 150°C. for a time between about 4 minutes and about 10 minutes.

8. The method of claim 2 wherein step e) comprises blowing compressed ambient temperature air onto the semiconductor chip.

9. The method of claim 2 wherein:

step d) comprises immersing the polished module in a bath of hot fuming nitric acid raised to a temperature between about 80°C. and 150°C. for a time between about 4 minutes and about 10 minutes; and

step e) comprises blowing compressed ambient temperature air onto the semiconductor chip.

10. The method of claim 2 wherein:

step d) comprises immersing the polished module in a bath of hot fuming nitric acid raised to a temperature between about 80°C. and 150°C. for a time between about 4 minutes and about 10 minutes; and

step f) comprises dipping the semiconductor chip in an agitated mercury bath for about 45 minutes.

11. The method of claim 2 wherein:

REPLACEMENT SHEET
12 JUL 1997



step e) comprises blowing compressed ambient air onto the semiconductor chip; and

step f) comprises dipping the semiconductor chip in an agitated mercury bath for about 45 minutes.

12. The method of claim 2 wherein:

step d) comprises immersing the polished module in a bath of hot fuming nitric acid raised to a temperature between about 80°C. and 150°C. for a time between about 4 minutes and about 10 minutes;

step e) comprises blowing compressed ambient air onto the semiconductor chip; and

step f) comprises dipping the semiconductor chip in an agitated mercury bath for about 45 minutes.

13. A method for recovering an undamaged bare semiconductor chip from a plastic packaged module, the plastic packaged module molded of a plastic encapsulating resin which is etch resistant to fuming nitric acid and having a plurality of lead frame conductors, the chip having an active surface facing a first side of the plastic packaged module and a passive surface facing an opposing second side of the plastic packaged module, the active surface having a plurality of contact zones connected by a metal wire to the lead frame conductors, the recovering method comprising the steps of:

a) polishing the second opposing side of the plastic packaged module until the passive surface of the semiconductor chip is exposed;

b) polishing the first side of the plastic packaged module until the lead frame conductors are exposed, leaving a polished module;

c) removing the lead frame conductors;

d) heating the polished module to a temperature above approximately 80°C. without detrimentally affecting the semiconductor chip functionality and leaving a heated module; and

REPLACEMENT SHEET
12 JUL 1997



e) cooling the heated module to create a thermal shock so that all the remaining portions of the plastic encapsulating resin are eliminated, leaving the desired bare semiconductor chip.

14. The method of claim 13 wherein said step d) of heating the polished module comprises immersing the polished module in a bath of hot fuming nitric acid raised to a temperature between about 80°C. and about 150°C. for a time between about 4 minutes and about 10 minutes.

15. The method of claim 13 wherein step e) comprises blowing compressed ambient temperature air onto the semiconductor chip.

16. The method of claim 13 wherein:

step d) comprises immersing the polished module in a bath of hot fuming nitric acid raised to a temperature between about 80°C. and 150°C. for a time between about 4 minutes and about 10 minutes; and

step e) comprises blowing compressed ambient temperature air onto the semiconductor chip.

17. The method of claim 13 further including the step of:

f) eliminating the wire at the vicinity of the semiconductor chip contact zones.

18. The method of claim 17 wherein said step d) of heating the polished module comprises immersing the polished module in a bath of hot fuming nitric acid raised to a temperature between about 80°C. and about 150°C. for a time between about 4 minutes and about 10 minutes.

19. The method of claim 17 wherein step e) comprises blowing compressed ambient temperature air onto the semiconductor chip.

20. The method of claim 17 wherein step f) comprises dipping the semiconductor chip in an agitated mercury bath for about 45 minutes.

21. The method of claim 17 wherein:

REPLACEMENT SHEET
12 JUL 1997

* C L M S *

step d) comprises immersing the polished module in a bath of hot fuming nitric acid raised to a temperature between about 80°C. and 150°C. for a time between about 4 minutes and about 10 minutes; and

step e) comprises blowing compressed ambient temperature air onto the semiconductor chip.

22. The method of claim 17 wherein:

step d) comprises immersing the polished module in a bath of hot fuming nitric acid raised to a temperature between about 80°C. and 150°C. for a time between about 4 minutes and about 10 minutes; and

step f) comprises dipping the semiconductor chip in an agitated mercury bath for about 45 minutes.

23. The method of claim 17 wherein:

step e) comprises blowing compressed ambient air onto the semiconductor chip; and

step f) comprises dipping the semiconductor chip in an agitated mercury bath for about 45 minutes.

24. The method of claim 17 wherein:

step d) comprises immersing the polished module in a bath of hot fuming nitric acid raised to a temperature between about 80°C. and 150°C. for a time between about 4 minutes and about 10 minutes;

step e) comprises blowing compressed ambient air onto the semiconductor chip; and

step f) comprises dipping the semiconductor chip in an agitated mercury bath for about 45 minutes.

REPLACEMENT SHEET
12 JUL 1997

METHOD FOR RECOVERING BARE SEMICONDUCTOR CHIPS FROM PLASTIC PACKAGED MODULES

ABSTRACT

The aim of opening methods is to recover the bare semiconductor chips undamaged. The method of the present invention is more particularly directed to plastic packaged module (10) of the type wherein the contact zones of the chip (11) are connected by wire-bonding to lead conductors (12) and wherein the chip is molded in such etch resistant resins. The opening method includes the steps of: a) polishing the module (10) upside to eliminate the tip part of the plastic encapsulating resin (13) until the conductors (12) of the lead frame are exposed; b) removing the lead frame; c) roughly polishing the module backside to eliminate the bottom part of the plastic encapsulating resin (13) until the passive face of the silicon chip (11) is exposed; d) immersing the resulting module in a hot fuming nitric acid bath raised to a temperature of about 120°C and for a time of about 8 mn; and, e) immediately cooling the said resulting module.

Fig. 4

REPLACEMENT SHEET
12 JUL 1997