

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
06 July 2023 (06.07.2023)



(10) International Publication Number
WO 2023/128873 A2

(51) International Patent Classification:
Not classified

(21) International Application Number:
PCT/SG2022/050938

(22) International Filing Date:
28 December 2022 (28.12.2022)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10202114506X 29 December 2021 (29.12.2021) SG

(71) Applicant: SINGAPORE HEALTH SERVICES PTE LTD [SG/SG]; 10 Hospital Boulevard, #19-01, Outram Community Hospital, Singapore 168582 (SG).

(72) Inventors: NG, Tze Kiat; c/o Singapore General Hospital, 10 Hospital Boulevard, #19-01, Outram Community Hospital, Singapore 168582 (SG). HO, Sun Sien, Henry; c/o Singapore General Hospital, 10 Hospital Boulevard,

#19-01, Outram Community Hospital, Singapore 168582 (SG). CHEONG, Wai Chye; c/o Singapore General Hospital, 10 Hospital Boulevard, #19-01, Outram Community Hospital, Singapore 168582 (SG). LEE, Han Jie; c/o Singapore General Hospital, 10 Hospital Boulevard, #19-01, Outram Community Hospital, Singapore 168582 (SG).

(74) Agent: VIERING, JENTSCHURA & PARTNER LLP; P.O. Box 1088, Rochor Post Office, Rochor Road, Singapore 911833 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,

(54) Title: LIQUID FLOWRATE GAUGE

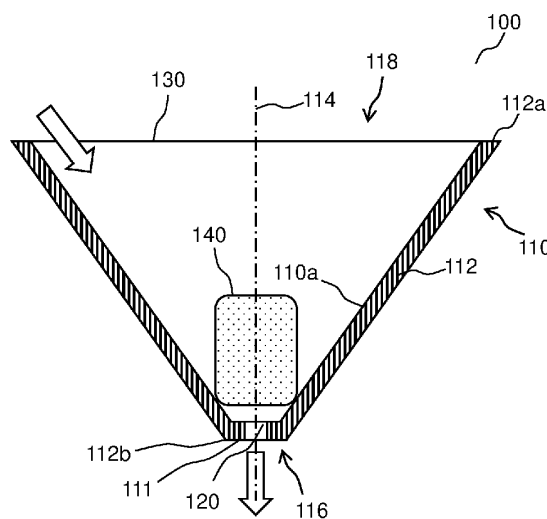


FIG. 1A

(57) Abstract: A liquid flowrate gauge including a receptacle structure having a surrounding wall around a central axis, wherein an outlet port and an inflow opening are disposed on opposite sides of the receptacle structure along the central axis; and a floatable member loosely sitting within the receptacle structure in a manner so as to define at least one gap between the floatable member and the receptacle structure to maintain a flow path therethrough. The outlet port is dimensioned to achieve a liquid flowrate equal to or above a threshold outlet flowrate and the floatable member is configured to be floated when a liquid level of a liquid accumulated in the receptacle structure is equal to or higher than a predetermined height. The floatable member being floated serve as an indication that a rate of inflow of the liquid is equal to or above the threshold outlet flowrate.

[Continued on next page]



WO 2023/128873 A2

TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*