(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
19 June 2003 (19.06.2003)

PCT

(10) International Publication Number
WO 03/050390 A1

(51) International Patent Classification[7]: E21B 47/09, 41/00, 47/00

(21) International Application Number: PCT/GB02/05349

(22) International Filing Date:
27 November 2002 (27.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
01310376.7 12 December 2001 (12.12.2001) EP

(71) Applicant *(for all designated States except US)*: **COOPER CAMERON CORPORATION** [US/US]; 1333 West Loop South, Suite 1700, Houston, TX 77027-9109 (US).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: **HOPPER, Hans, Paul** [GB/GB]; Hillhouse, Whiterashers, Aberdeenshire AB21 0QL (GB).


(74) Agent: **GILL JENNINGS & EVERY**; Broadgate House, 7 Eldon Street, London EC2M 7HL (GB).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,

*[Continued on next page]*

(54) Title: BOREHOLE EQUIPMENT POSITION DETECTION SYSTEM

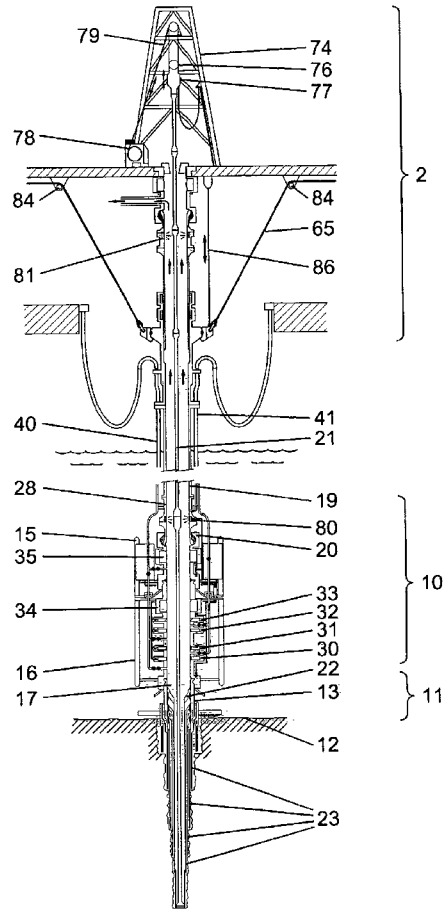


(57) Abstract: It is important to know the precise position of equipment when testing of the BOP, testing the wellhead, flow testing the well, kick control, well circulation and testing of spool trees between the wellhead and the BOP. Accordingly, there is provided a system for determining the real time position of equipment within a bore, the system comprising: a data input means for inputting data concerning the physical characteristics of components which are run into the bore; a sensing means located, in use, within the bore and including a sensor for determining data concerning at least one physical characteristic of the equipment at a given time; a data storage means for recording the inputted data and the determined data; and a comparison means for comparing the input data and the determined data to establish which part of the equipment is being sensed by the sensor.

WO 03/050390 A1

TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*