

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
16 September 2021 (16.09.2021)



(10) International Publication Number
WO 2021/183964 A2

(51) International Patent Classification:
Not classified

(21) International Application Number:
PCT/US2021/022226

(22) International Filing Date:
12 March 2021 (12.03.2021)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/989,397 13 March 2020 (13.03.2020) US

(71) Applicant: **BARD ACCESS SYSTEMS, INC.** [US/US];
605 North 5600 West, Salt Lake City, UT 84116 (US).

(72) Inventors: **HOWELL, Glade, H.**; 2037 East Bear Mountain Drive, Draper, UT 84020 (US). **THORNLEY, Kyle, G.**; 1061 Turnberry Circle, Farmington, UT 84025 (US). **SEPULVEDA, Juan**; 431 S 675 W, Centerville, UT 84014

(US). **LLOYD, Kevin**; 2160 E Stream View Drive, Cottonwood Heights, UT 84093 (US).

(74) Agent: **WIGHT, Todd, W.**; Rutan & Tucker LLP, 18575 Jamboree Road, 9th Floor, Irvine, CA 92612 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) Title: GUIDEWIRE-MANAGEMENT DEVICES AND METHODS THEREOF

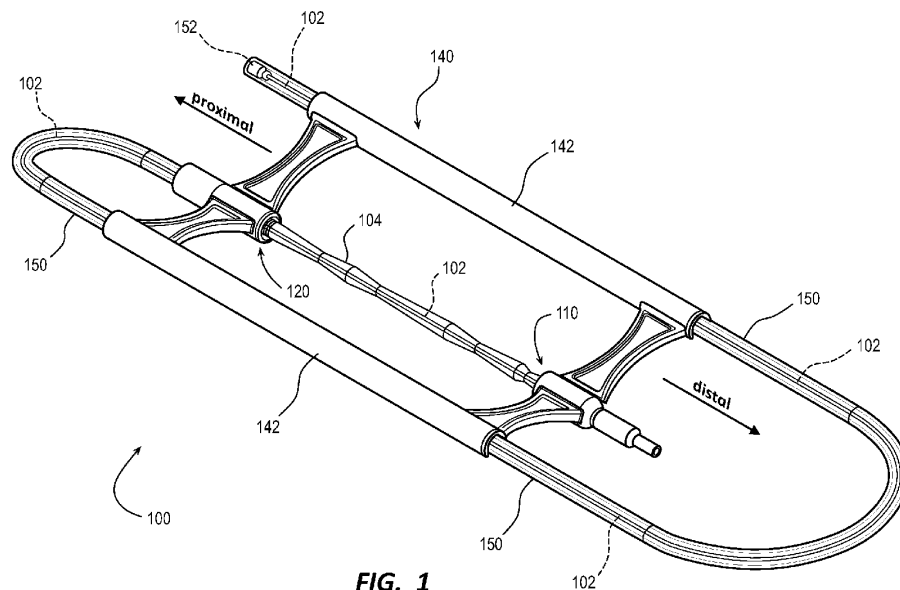


FIG. 1

(57) Abstract: Guidewire-management devices and systems thereof are disclosed herein. A guidewire-management device can include a guidewire, a first sleeve, and a second sleeve. The first sleeve can be configured for distally feeding the guidewire out of the guidewire-management device. The first sleeve can also be configured for proximally feeding the guidewire into the guidewire-management device. The second sleeve can be proximal of the first sleeve in the guidewire-management device. The second sleeve can be configured for feeding the guidewire in concert with the first sleeve. At least a length of the guidewire extending between the first sleeve and the second sleeve can be disposed within a sterile barrier configured to maintain sterility of the guidewire.

[Continued on next page]

UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*