



(51) International Patent Classification:
H04N 19/00 (2014.01)

(21) International Application Number:
PCT/CN2021/077000

(22) International Filing Date:
20 February 2021 (20.02.2021)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/EP2020/055220
28 February 2020 (28.02.2020) EP

(71) Applicant: **HUAWEI TECHNOLOGIES CO., LTD.**
[CN/CN]; Huawei Administration Building, Bantian, Long-
gang District, Shenzhen, Guangdong 518129 (CN).

(72) Inventors: **ESENLIK, Semih**; c/o Huawei Technolo-
gies Duesseldorf GmbH, Riesstr. 25, 80992 Munich
(DE). **WANG, Biao**; c/o Huawei Technologies Duessel-
dorf GmbH, Riesstr. 25, 80992 Munich (DE). **KOTRA,**
Anand Meher; c/o Huawei Technologies Duesseldorf
GmbH, Riesstr. 25, 80992 Munich (DE). **ALSHINA, Ele-**
na Alexandrovna; c/o Huawei Technologies Duesseldorf
GmbH, Riesstr. 25, 80992 Munich (DE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A DECODER AND CORRESPONDING METHODS TO SIGNAL PICTURE PARTITIONING INFORMATION FOR SLICES

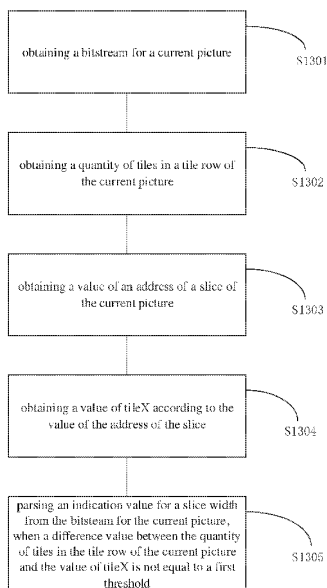


Fig. 13

(57) Abstract: A method of coding implemented by a decoding device and a decoder are disclosed, the method comprising: obtaining a bitstream for a current picture; obtaining a quantity of tiles in a tile row of the current picture; obtaining a value of an address of a current slice, the current slice is comprised in the current picture; obtaining a value of tileX according to the value of the address of the current slice; parsing an indication value for a slice width from the bitstream for the current picture, when a difference value between the quantity of tiles in the tile row of the current picture and the value of tileX is not equal to a first threshold.