



- (51) **International Patent Classification:** *H04L 1/18* (2006.01)

(21) **International Application Number:** PCT/EP2009/062255

(22) **International Filing Date:** 22 September 2009 (22.09.2009)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:** 61/099,049 22 September 2008 (22.09.2008) US

(71) **Applicant** (*for all designated States except US*): **NOKIA SIEMENS NETWORKS OY** [FI/FI]; Karaportti 3, FIN-02610 Espoo (FI).

(72) **Inventors; and**

(75) **Inventors/Applicants** (*for US only*): **CHMIEL, Mieszko** [PL/PL]; Powstancow Slaskich 50/23, PL-48-340 Glucholazy (PL). **FREDERIKSEN, Frank** [DK/DK]; Hornbækvej 4, DK-9270 Klarup (DK). **LINDH, Lars** [FI/FI]; Ulfshbyvägen 19 F 22-23, FIN-00350 Helsinki (FI).

(74) **Common Representative:** **NOKIA SIEMENS NETWORKS OY**; COO RTP IPR/Patent Administration, 80240 Munich (DE).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

 - *with international search report (Art. 21(3))*
 - *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(54) Title: METHOD AND APPARATUS FOR PROVIDING SIGNALING OF REDUNDANCY VERSIONS

FIG. 6A


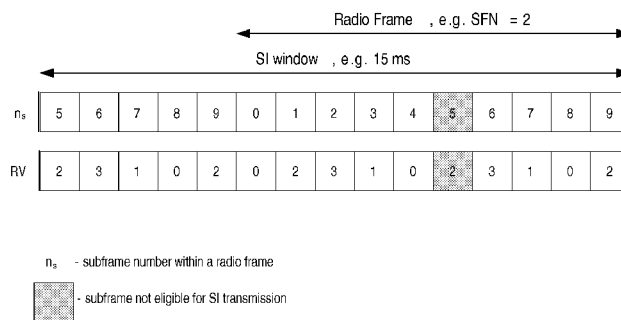


FIG. 6B

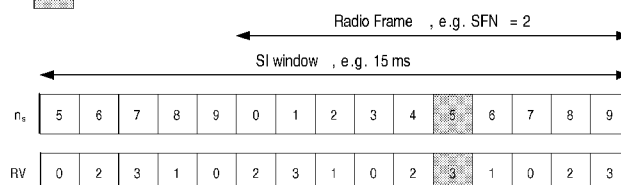

- (57) Abstract:** An approach is provided for efficient signaling of redundancy version information. A redundancy version signaling module detects the start of a system information radio transmission window and assigns a redundancy version sequence at the start of the transmission window.