

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 September 2003 (18.09.2003)

PCT

(10) International Publication Number
WO 03/076043 A1

(51) International Patent Classification⁷: **B01D 35/30**

(21) International Application Number: PCT/US03/06053

(22) International Filing Date: 28 February 2003 (28.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/090,247 4 March 2002 (04.03.2002) US

(71) Applicant: **USE CONSUMER & COMMERCIAL WATERGROUP, INC.** [US/US]; One Culligan Parkway, Northbrook, IL 60062 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(72) Inventor: **GILL, Thomas**; 9701 Banta Avenue, Anaheim, CA 92804 (US).

Published:
— with international search report

(74) Agent: **CRAIN, Lawrence, J.**; Greer, Burns & Crain, Ltd., 300 South Wacker Drive, Suite 2500, Chicago, IL 60606 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **SWIVELLING FILTER HEAD ASSEMBLY**

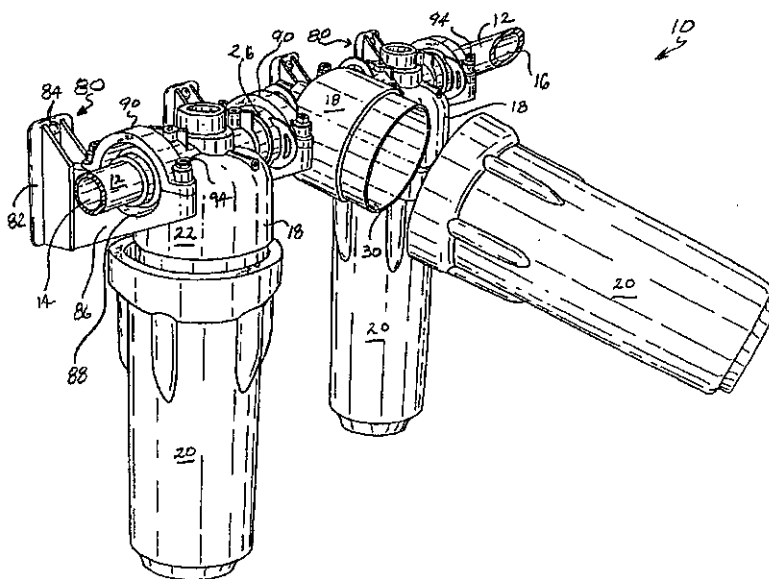

(57) Abstract: A filter head assembly is configured for connection to a water line (12) and including at least two filter heads (22) connected to each other for treating water supplied through the water supply line and at least one of the filter heads accommodating a replaceable filter bowl (20). The assembly includes at least one head housing (22) having an inlet port (24), an outlet port (26), a central chamber (28) in fluid communication with the ports and a bowl connection opening (30) in fluid communication with the chamber. Each of the ports (24, 26) is pivotally connected to one of a tubular connector (32) and an end plug fitting (34) so that the head housing (22) can pivot relative to the respective connector (32) and/or fitting (34).