



- (51) International Patent Classification:
F25D 11/00 (2006.01) *F25D 17/06* (2006.01)
- (21) International Application Number:
PCT/US2014/045051
- (22) International Filing Date:
1 July 2014 (01.07.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/875,901 10 September 2013 (10.09.2013) US
- (71) Applicant: **CARRIER CORPORATION** [US/US]; One Carrier Place, Farmington, CT 06034 (US).
- (72) Inventors: **GAN, Mingfei**; 6304 Thompson Rd., Syracuse, NY 13221 (US). **LEE, KeonWoo**; P.O. Box 4805, Carrier Parkway, TR-20, Syracuse, NY 13221 (US). **JIA, Yue**; 6304 Thompson Rd., Syracuse, NY 13221 (US).
- (74) Agent: **FOX, David, A.**; Cantor Colburn LLP, 20 Church Street, 22nd Floor, Hartford, CT 06103 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: KICK PLATE FOR REFRIGERATED CONTAINER ASSEMBLY

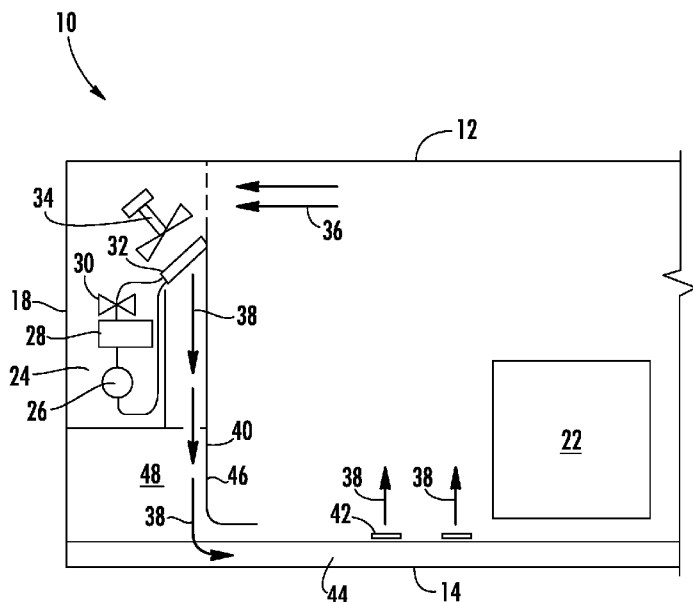


FIG. 2

(57) Abstract: A refrigerated transportation cargo container includes a transportation cargo container and a refrigeration unit disposed at an end of the transportation cargo container to provide a flow of supply air for the transportation cargo container. The refrigeration unit includes a housing and an evaporator fan (34) to urge the flow of supply air through the refrigeration unit. A kick plate assembly (40) includes a kick plate (46) extending from the refrigeration unit toward a floor of the cargo container and a baffle plate extending between the refrigeration unit and a sidewall of the cargo container. The kick plate assembly defines a discharge cavity to direct the flow of supply air toward the floor of the cargo container.

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*