

SURFACE-MOUNT TYPE MICROMINIATURE
ELECTRIC CURRENT FUSE

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 The present invention relates to a microminiature electric current fuse which can be mounted on the surface of a printed circuit substrate to cope with microminiaturization technology of a circuit for electronics and high density of electronic elements mounted on the circuit.

10 2. Description of Prior Art

 The following surface-mount type micro sized electric current fuses according to a prior art have been developed. One example is that which has been developed for the purpose of miniaturization, wherein a fusible part composed of
15 a metallic film is formed on an insulating substrate and subsequently, the metallic film constituting this fusible part is embedded in a low melting point glass or plastic material. Another example of micro sized electric current fuse which has been developed aimed at a low cost is
20 constructed such that after the fusible wire has been connected between metallic electrodes by means of bonding or the like, the fusible wire is integrally molded together with a fuse body in such a manner as to be embedded in the plastic material. However, since a surface-mount type micro
25 sized electric current fuse having such a construction as described above has been developed solely with a view to miniaturization and reduction of cost, the fusible part or the fusible wire (hereinafter collectively referred as "fusible part") comes into direct contact with an insulating

5-0740038

member such as a plastic material, low melting point glass or the like, resulting in an inability of the fusible part to maintain thermal neutrality and poor pre-arcing time-current characteristics.

5 More specifically, such a construction whereby the fusible part comes into direct contact with the insulating material requires a large amount of exoergic action since, when Joule heat is generated at the fusible part due to a flow of abnormal current due to circuit failure or the
10 like of an electronic device, such Joule heat is directly absorbed by the insulating material, resulting in a delay in cutting off such an abnormal current and heating of the insulating material itself which the fusible part is in contact with.

15 Consequently, a more exoergic action than necessary for heating the fusible part is required so that the internal resistance of the fusible element itself has to be increased and as a result, under normal use conditions, the electric loss on the electric circuit caused by the fusible
20 element alone is considerable and an exoergic action of the fuse element has to be large.

 Another example of a microminiature electric current fuse which has been developed in order to attain a higher reliability is constructed such that, after electrodes have
25 been disposed in and fixed to the casing, a fusible wire is extended between the electrodes and soldered thereto and after that the opening portion is tightly closed by means of a lid. However, it has to be pointed out that, according to

the method of soldering the fusible wire to the electrodes, the difference in bulging of the solder upon solidification may cause a variation in the distance between the electrodes or the length of the fusible wire. Such a problem of
5 variation has yet to be solved.

In addition, since the above-mentioned miniature or microminiature electric current fuse according to a prior art requires each component to be machined and assembled one by one in a batch-type process and such machining and
10 assembly work is difficult due to such components being small or production is difficult to execute, costs have remained relatively high.

SUMMARY OF THE INVENTION

An object of the present invention is, therefore,
15 to provide a surface-mount type microminiature electric current fuse which solves the problems pointed out above, has a construction which allows easy manufacture, minimizes variation in pre-arcing time, and which is highly reliable.

In order to attain the object-mentioned above,
20 a surface-mount type microminiature electric current fuse according to the present invention comprises a body having a substantially rectangular parallelepiped box like configuration having two opposing shorter side walls, two opposing longer side walls and a bottom part, said body
25 being made of a heat resistant, electrically insulating material and having resting portions, each of which extending from the inner surface of each of said longer side walls of said body toward a space defined in said body and

forming a stepped portion relative to the top surfaces of said longer side walls; a fusible wire; a pair of metallic electrodes respectively consisting of an integral metallic sheet and disposed at said shorter side walls of said body; and a lid portion made of a heat resistant and electrically insulating material, the cross-section of said lid portion having a convex shape to be fitted in the opening of said body. Each of said pair of metallic electrodes includes a saddle part having a saddle shape to fit onto the top surface and the both side surfaces of said shorter side walls of said body, and a fusible wire gripping part extending from the end portion of said saddle part at the side facing said space of said body within said space with the width of said fusible wire gripping part being narrower than the width of said end portion of said saddle part under the condition that said saddle part of said metallic electrode is fitted onto said shorter side wall of said body. The fusible wire gripping part has a first sheet portion extending within said space, and a second sheet portion which is bent and extends from said first sheet portion in the direction different from the direction of said first sheet portion extending in said space and cooperates with said first sheet portion so as to grip the end of said fusible wire. The pair of metallic electrodes gripping the opposite ends of said fusible wire with said fusible wire gripping part are respectively disposed at the shorter side walls of said body so that the opposite ends of said fusible wire are gripped by said fusible wire gripping

parts so as to extend said fusible wire through said space of said body. The lid portion is pressed to such an extent that the flat surface of said lid portion is sunken to a location slightly lower relative to the top surface of said longer side walls of said body, and both flat planes
5 of the convex portion of said lid portion are respectively placed on the upper surfaces of said resting portions of said body while an adhesive is applied so that said space of said body is sealed and said lid portion is fixed to
10 said body. Each of said pair of metallic electrodes is sandwiched and fixed by the inner surface of said shorter side wall and the end surface of said lid portion in the longitudinal direction.

Since the surface-mount type microminiature
15 electric current fuse according to the present invention is constructed as described above, manufacturing and assembly processes can be made continuous, thus allowing efficient production. Accordingly, a considerable reduction in manufacturing costs can be realized.

20 The present invention has been provided to attain a micro size surface-mount type electric current fuse which can satisfy the requirements laid down in the world-wide national standards required in the field of the surface-mount type microminiature electric current fuses. A
25 surface-mount type microminiature electric current fuse according to the present invention can attain thermal neutrality of the fusible wire so that its variation in pre-arcing time-current characteristic can be smaller

than any other surface-mount type microminiature electric current fuse according to a prior art. In addition, the breaking capacity can be two times as large as conventional microminiature electric current fuses, making it possible
5 for the microminiature electric current fuses to be used for both direct current and alternate current circuits. Furthermore, compared to a conventional type fuse capable of maintaining thermal neutrality, a fuse according to the present invention can provide a complete enclosure, making
10 it possible to withstand against warm water washing which takes the place of flon washing of a circuit substrate to prevent pollution.

The metallic electrodes can be mechanically fixed and electrically connected by soldering to pads of a circuit
15 pattern on a circuit substrate. Further, the length of the fusible wire can be exactly maintained, and the fusible wire can be readily and accurately held in a floating condition between the bottom surface of the body and the backside surface of the lid portion. As a result, any variation
20 in respect of the pre-arcing time-current characteristic can be kept to a minimum.

The surface-mount type microminiature electric current fuse according to the present invention can meet with the condition stipulated in Japanese Regulation for
25 Electrical Appliances to the effect that the distance between the electrodes of a fuse to be used in an alternate current electric path should be more than 1.5 mm and a microminiatured but highly reliable electric fuse

provided by the present invention can be applied to any of the alternate current and direct current circuits.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects and features of the invention will become more obvious hereinafter from a consideration of the following description taken in connection with the accompanying drawings, wherein:

Fig. 1 is a perspective view illustrating the surface-mount type microminiature electric current fuse according to a first preferred embodiment of the present invention;

Fig. 2A is the sectional view taken along the line A-A in Fig. 1;

Fig. 2B is the sectional view taken along the line B-B in Fig. 1;

Fig. 3 illustrates a pair of metallic electrodes and a fusible wire which are components of the surface-mount type microminiature electric current fuse according to the first embodiment shown in Fig. 1, the opposite ends of the fusible wire being shown as gripped by the pair of the metallic electrodes;

Fig. 4 is a perspective view showing a body which is a component of the surface-mount type microminiature electric current fuse according to the first embodiment shown in Fig. 1;

Fig. 5 is a perspective view showing a lid portion which is a component of the surface-mount type microminiature electric current fuse according to the first

embodiment shown in Fig. 1;

Fig. 6 is a perspective view showing the manner of assembly of the surface-mount type microminiature electric current fuse according to the first embodiment shown in

5 Fig. 1;

Fig. 7 illustrates how the surface-mount type microminiature electric current fuse shown in Fig. 1 is fixed and electrically connected for use by soldering to pads of a pattern formed on a printed circuit substrate;

10 Fig. 8 is a perspective view showing a surface-mount type microminiature electric current fuse according to a second embodiment of the present invention;

Fig. 9 illustrates a pair of metallic electrodes and a fusible wire which are components of the surface-mount
15 type microminiature electric fuse according to the second embodiment of the present invention shown in Fig. 8, the opposite end portions of said fusible wire being shown as gripped by the pair of the metallic electrodes; and

Fig. 10 is a perspective view showing how the
20 surface-mount type microminiature electric current fuse according to the second embodiment of the present invention shown in Fig. 8 is fixed and electrically connected for use by soldering to pads of a pattern formed on a printed circuit substrate.

25 DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will now be explained by referring to the accompanying drawings. Through the drawings, same reference numerals designate

identical or similar elements.

Fig. 1 is a perspective view illustrating a surface-mount type microminiature electric current fuse according to a first preferred embodiment of the present invention.

5 Fig. 2A is the sectional view taken along the line A-A in Fig. 1 while Fig. 2B is the sectional view taken along the line B-B in Fig. 1. Fig. 3 illustrates a pair of metallic electrodes and a fusible wire which are components of the surface-mount type microminiature electric current fuse

10 according to the first embodiment of the present invention as shown in Fig. 1, the opposite end portions of said fusible wire being illustrated as gripped by the pair of metallic electrodes. Fig. 4 is a perspective view of a body which is a component of the surface-mount type

15 microminiature electric current fuse according to the first embodiment as shown in Fig. 1. Fig. 5 is a perspective view of the lid portion which is a component of the surface-mount type microminiature electric current fuse according to the first embodiment shown in Fig. 1. Fig. 6 is a perspective

20 view illustrating the manner of assembly of the surface-mount type microminiature electric current fuse according to the first embodiment as shown in Fig. 1.

In Figs. 1 and 2, the reference numerals 1 designates a body made of a heat resistant and electrically

25 insulating material such as ceramics or the like and having a rectangular parallelepiped box-like configuration, the reference numeral 2 a pair of metallic electrodes attached respectively to each of the shorter side walls of the body 1

and made by working a metallic sheet, the reference numeral 3 a lid portion made of a heat resistant and electrically insulating material such as ceramic and adapted to fit in the opening of the body 1, the reference numeral 4 an adhesive material for adhering and fixing the lid portion 3 to the body 1 and hermetically enclosing the interior of the body 1, and the reference numeral 5 a fusible wire extended in the space 6 of the body 1 with the opposite end portions gripped by the metallic electrodes 2.

10 Referring to Fig. 4, the body 1 is consisted of two opposing shorter side walls 11, two opposing longer side walls 12 and a bottom part 13. The inside surface of the respective longer side walls 12 includes resting portions 14 which extends toward the space 6 of the body 1 and provided
15 stepped portions relative to the top surfaces of the longer side walls 12.

 Referring to Fig. 3, and Figs. 2A and 2B, the metallic electrodes 2 are respectively made of an integral metallic sheet. Each electrode 2 includes a saddle part 21
20 having a saddle shaped configuration adaptable to the top surface and the opposite side surfaces of the shorter side wall 11 (Fig. 4) of the body 1, and a fusible wire gripping part 22 adapted to grip the end portion of the fusible wire 5. The width of the first portion of the saddle part 21 to
25 be rested on the top surface of the shorter side wall 11 of the body 1 is equal to the width of the second portion of the saddle part 21 to be in contact with the outer surface of the shorter side wall 11, but the width of the third

portion of the saddle part 21 to be in contact with the inner surface of the shorter side wall 11 is smaller than the width of the above-mentioned second portion. The third portion of the saddle part 21 is so arranged relative to the second portion of the saddle part 21 that it is positioned centrally of the shorter side wall 11 when the saddle part 21 is attached to the shorter side wall 11 of the body 1. The third portion of the saddle part 21 is provided with a first sheet portion 221 which is bent substantially normal to the second portion of the saddle part 21 from the opposite end to the second portion and extends in the same direction as the second portion of the saddle part 21. The width of the first sheet port 221 is same as that of the third portion.. A second sheet portion 222 extends from one end of the first sheet portion 221 in the width direction before work is made on the second sheet portion in order to grip the fusible element 5. The second sheet portion 222 is bent from the end portion of the first sheet portion 221 in a manner to grip the end of the fusible wire 5 placed on the first sheet portion 221 and laid on the first sheet portion 221. By means of this work, the end of the fusible element 5 is gripped between the first sheet portion 221 and the second sheet portion 222 and secured to the metallic electrodes 2. The size of the second sheet portion 222 is substantially same as that of the first sheet portion 221.

Referring to Fig. 5, the lid portion 3 has the cross section of a convex shaped configuration. The lid portion 3 is of such a size as to be fitted in the opening of the

body 1 in the condition in which the metallic electrodes 2 are attached to the body 1. As shown in Fig. 2, the lid portion 3 has the flat surfaces 31 at the opposite sides of the protruded portion, the flat surfaces 31 being rested on the upper surfaces of the resting portion 14 of the body 1 when the lid portion 3 is fitted onto the opening of the body 1.

Next, reference is made to Figs. 3 and 6. An example of manufacture and assembly of the surface-mount type microminiature electric current fuse according to the first preferred embodiment will be explained. A pair of metallic electrodes 2 are continuously press worked in the form of a frame. It is to be noted that the spaced distance between a pair of metallic electrodes 2 is decided to be same as that between the opposite shorter side walls 11 of the body 1. In this condition, the respective end portions of the fusible wire 5 are placed on the first sheet portion 221 of the respective metallic electrodes 2, the second sheet portion 222 is folded to be laid on the first sheet portion 221 to grip the end portions of the fusible wire 5. This step is executed as a continuous process. The bodies 1 are placed to one another in a manner as the longer side walls 12 thereof are adjacent to each other and also in a manner as the spaced distance between two adjacent bodies are mated with the spaced distance between two adjacent sets of metallic electrodes 2 pairs with the fusible wires 5 respectively gripped thereby. The saddle parts 21 of the pair of the metallic electrodes 2 having the fusible wire 5

gripped thereby are then fitted onto the opposite shorter side walls 11 of the body 1 and fixedly mounted. These steps are performed as continuous processes. In the course of this step, the fusible wire 5 is extended in the space 6 of the body 1 in a floating condition. Next, as shown in Fig. 6, the protruded side of the lid portion 3 is put in the opening of the body 1 and pressed to such a degree as the flat surface of the lid portion 3 is slightly sunken relative to the top surface of the longer side walls 12 of the body 1. At this time, each of the third portions of the saddle parts 21 of the metallic electrodes 2 is sandwiched by the inner surface of each of the shorter side walls 11 of the body 1 and each of the end surfaces 32 (see Fig. 5) of the lid portion 3 and fixed therein. Also, the flat surfaces 31 are respectively rested on the upper surfaces of the resting portion 14 of the body 1. As shown in Figs. 2A and 2B, as the flat surface of the lid portion 3 is pressed to a position where the flat surface is slightly sunken relative to the top surface of the longer side walls 12 of the body 1, a shallow recess will be provided and when an adhesive material 4 is applied to the shallow recess or the flat surface of the lid portion 3, the adhesive material 4 may flow into the clearances between the side surfaces of the lid portion 3, and the longer side walls 12 of the body 1 and the third portion of the saddle part 21 of the metallic electrodes 2, and between the flat surfaces 31 of the lid portion 3 and the upper surface of the resting portion 14, and are solidified to fix these adjacent

components. As the consequence, the space 6 of the body 1 can be positively sealed. Since the above-mentioned processes can be easily executed with continuous processes, productivity can be enhanced.

5 Fig. 7 illustrates the manner in which the surface-mount type microminiature electric current fuse shown in Fig. 1 is fixed and electrically connected for use by soldering to pads of a pattern formed on a printed circuit substrate. In Fig. 7, the reference numeral 100 designates
10 the surface-mount type microminiature electric current fuse shown in Fig. 1, the reference numeral 50 a printed circuit substrate, and the reference numeral 52 pads.

 Fig. 8 is a perspective view illustrating a surface-mount type microminiature electric current fuse according
15 to a second embodiment of the present invention. Fig. 9 illustrates a pair of metallic electrodes and a fusible wire which are components for the surface-mount type microminiature current fuse according to the second embodiment of the present invention shown in Fig. 8, the electrodes
20 and fusible wire being illustrated in such a state as the opposite ends of the fusible wire are gripped by the pair of metallic electrodes. Fig. 10 is a perspective view showing the manner in which the surface-mount type microminiature electric current fuse according to the second embodiment
25 of the present invention shown in Fig. 8 is fixed and electrically connected for use by soldering to pads of a pattern formed on a printed circuit substrate. In Fig. 10, the reference numeral 102 designates the surface-mount type

microminiature electric current fuse shown in Fig. 8.

The difference of the second embodiment from the first embodiment is that the portion of the metallic electrode 2 which is in contact with the outer surface of the shorter side wall 11 of the body 1 extends as far as to the bottom portion of the body 1 and further bent to extend along the bottom portion to a part of the bottom portion, the lid portion 3 is made of a transparent insulating material, the adhesive material 4 is transparent and that the portion of the fuse to be soldered to a printed substrate is located at the side of the bottom portion of the body 1 rather than at the side of the opening of the body 1 as in the case of the first embodiment. Other aspects than the above are same as those of the first embodiment. When the lid portion 3 and the adhesive material 4 are transparent, the interior of the body 1 can be observed from the outside as shown in Fig. 8 and whether the fusible wire 5 is properly extended or not can be readily decided.

The continuous working and assembly processes of the surface-mount type microminiature electric current fuse according to the second preferred embodiment are identical or similar to those processes of the first embodiment as described above.



WHAT IS CLAIMED IS:

1. A surface-mount type microminiature electric current fuse comprising:

- a body having a substantially rectangular
5 parallelepiped box like configuration having two opposing shorter side walls, two opposing longer side walls and a bottom part, said body being made of a heat resistant, electrically insulating material and having resting portions, each of which extends from the inner surface
10 of each of said longer side walls of said body toward a space defined in said body and forming a stepped portion relative to the top surfaces of said longer side walls;
 - a fusible wire;
 - a pair of metallic electrodes respectively consisting
15 of an integral metallic sheet and disposed at said shorter side walls of said body; and
 - a lid portion made of a heat resistant and electrically insulating material, the cross-section of said lid portion having a convex shape to be fitted in the
20 opening of said body; and wherein
- each of said pair of metallic electrodes includes a saddle part having a saddle shape to fitted onto the top surface and the both side surfaces of said shorter side walls of said body, and a fusible wire gripping part
25 extending from the end portion of said saddle part at the side facing said space of said body within said space with the width of said fusible wire gripping part being narrower than the width of said end portion of said saddle part



- 17 -

under the condition that said saddle part of said metallic electrode is fitted onto said shorter side wall of said body;

5 said fusible wire gripping part has a first sheet portion extending within said space, and a second sheet portion which is bent and extends from said first sheet portion in the direction different from the direction of said first sheet portion extending in said space and cooperates with said first sheet portion so as to grip
10 the end of said fusible wire;

 said pair of metallic electrodes gripping the opposite ends of said fusible wire with said fusible wire gripping part are respectively disposed at the shorter side walls of said body so that the opposite ends of said fusible
15 wire are gripped by said fusible wire gripping parts so as to extend said fusible wire through said space of said body;

 said lid portion is pressed to such an extent that the flat surface of said lid portion is sunken to a location slightly lower relative to the top surface of said longer
20 side walls of said body, and both flat planes of the convex portion of said lid portion are respectively placed on the upper surfaces of said resting portions of said body while an adhesive is applied so that said space of said body is sealed and said lid portion is fixed to said body; and

25 each of said pair of metallic electrodes is sandwiched and fixed by the inner surface of said shorter side wall and the end surface of said lid portion in the longitudinal direction.



- 18 -

2. A surface-mount type microminiature electric current fuse as claimed in Claim 1 wherein each of the portions of said saddle parts of said metallic electrodes disposed at the outer side of said shorter side walls of said body
5 extends to the bottom part of said body along said shorter side wall and is bent at said bottom part, further extending along said bottom part to a part of said bottom part, and said lid portion and said adhesive are transparent.

SURFACE-MOUNT TYPE MICROMINIATURE
ELECTRIC CURRENT FUSE

ABSTRACT OF THE DISCLOSURE

A pair of metallic electrodes gripping a fusible wire
5 are attached to the opposite ends of a box-like shaped body
and the lid portion is pressed to an extent of being
slightly sunken relative to the upper surface of the body.
Then adhesive is applied to the lid portion to fix the lid
portion to the body to seal the interior of the body. The
10 fusible wire is extended in the interior of the body in a
floating condition. Thus, such a construction allows an
easy manufacture, enables variation of pre-arcing time-
current characteristic to be kept to minimum, and brings
about a high degree of reliability.

FIGURE 6

Fig. 1

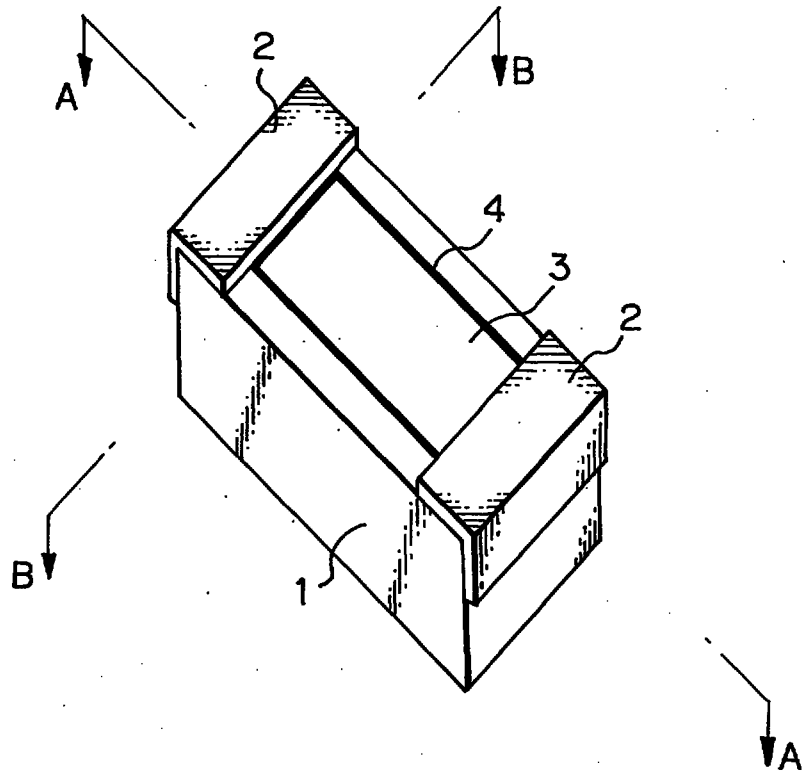


Fig. 2A

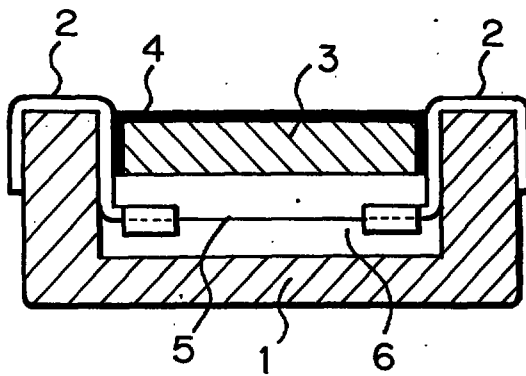


Fig. 2B

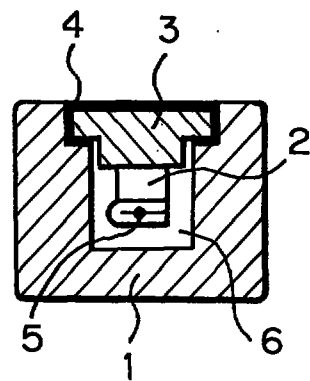


Fig. 3

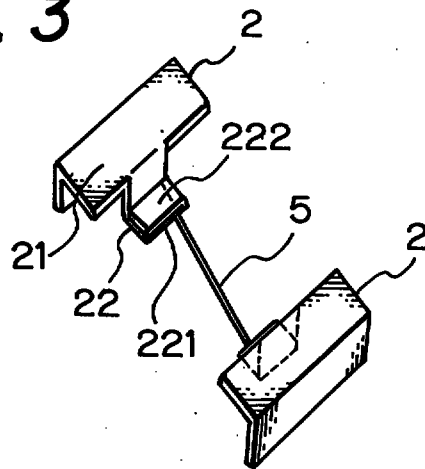


Fig. 4

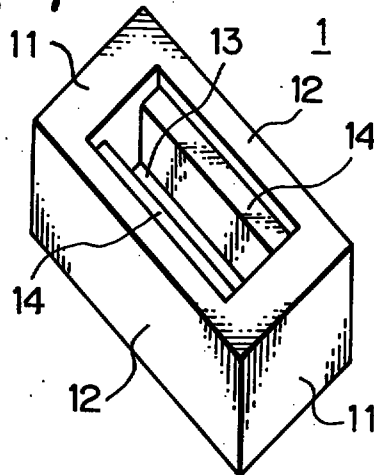


Fig. 5




Fig. 6

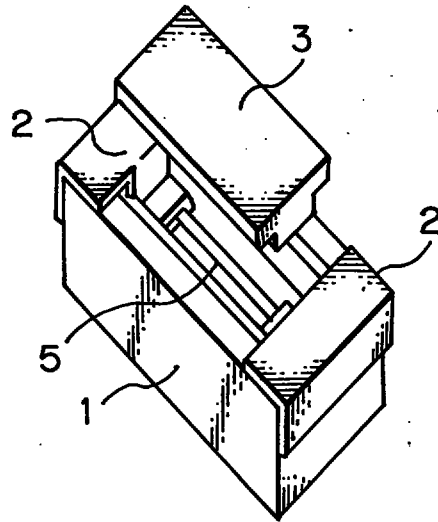


Fig. 7

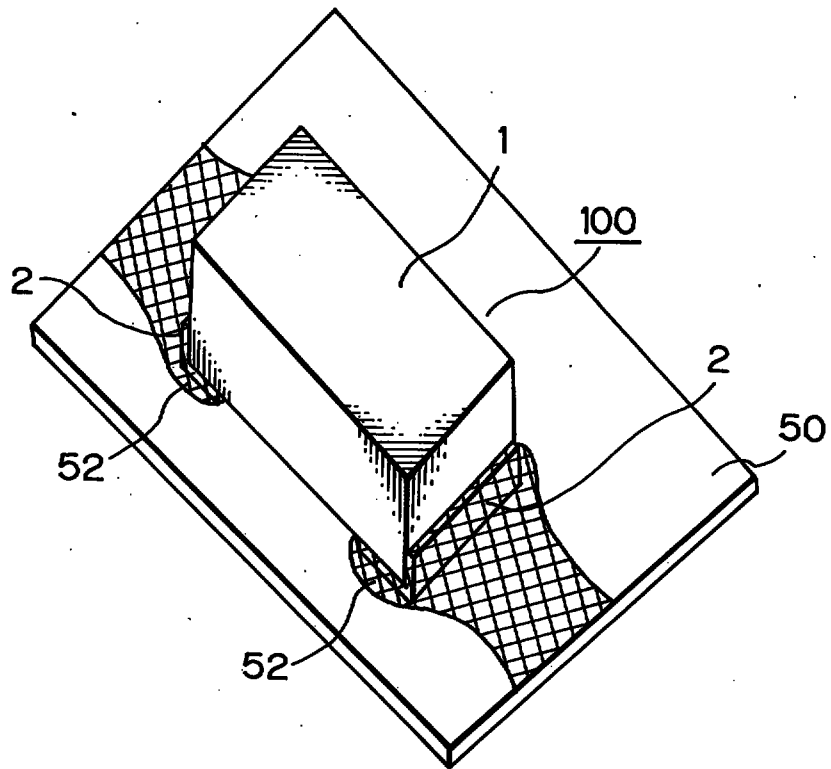
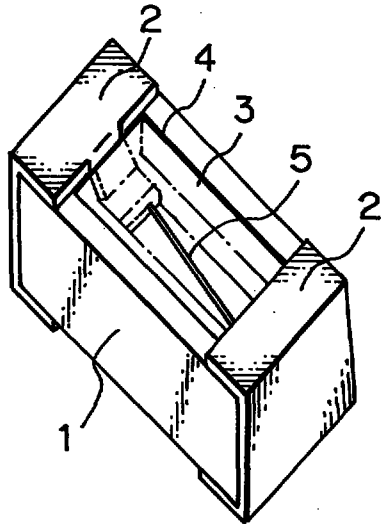
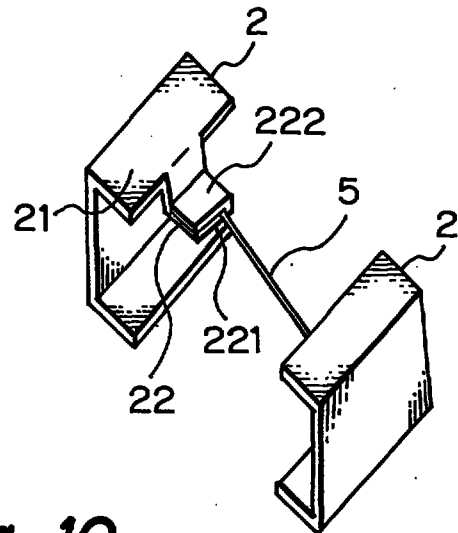
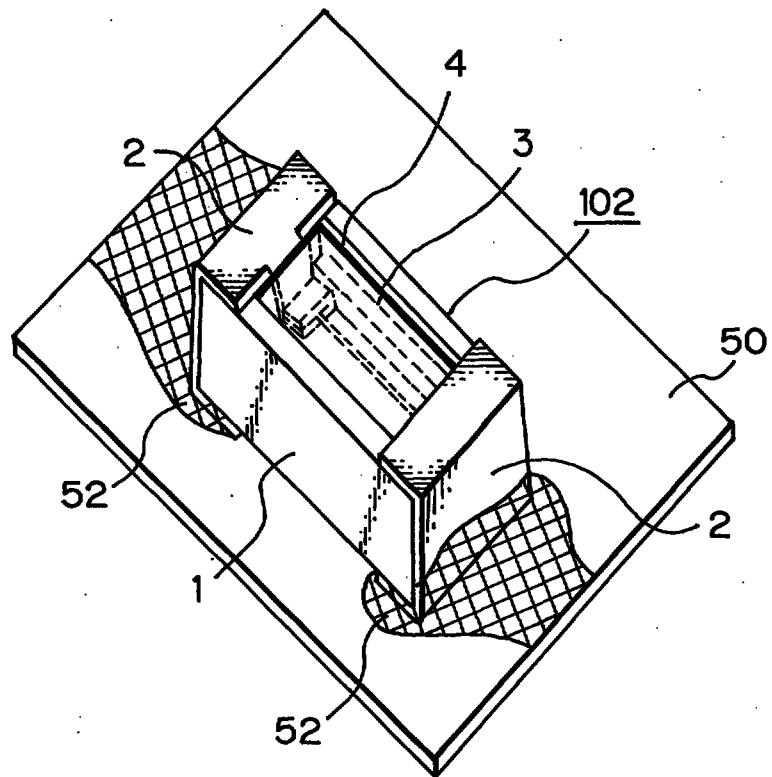


Fig. 8**Fig. 9****Fig. 10**

8-01100-9