

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 March 2001 (29.03.2001)

PCT

(10) International Publication Number
WO 01/21282 A2

(51) International Patent Classification⁷: **B01D 39/00**

(21) International Application Number: **PCT/IB00/01419**

(22) International Filing Date:
22 September 2000 (22.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
9922451.1 22 September 1999 (22.09.1999) GB

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*):
VIOSTYLE LIMITED [CY/CY]; Margarita House,
15 Therm. Dervis Avenue, CY-1309 Nicosia (CY).

Published:
— *Without international search report and to be republished upon receipt of that report.*


(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **ZENGA, Giovanni, Battista** [IT/TT]; Villa Lovera, 5/2, I-10025 Pino Torinese (IT).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(74) Agents: **NACHSHEN, Neil, Jacob et al.**; D. Young & Co.,
21 New Fetter Lane, London EC4A 1DA (GB).

(54) Title: **LAMINAR STRUCTURE**

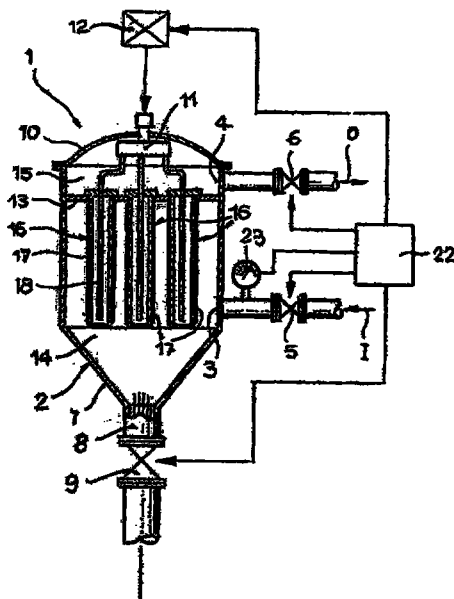

(57) Abstract: A laminar structure (17) comprising a deposited metal, the structure having microholes (17a) extending between a first surface and a second surface thereof, each microhole having a wall which meets the first surface with a rounded edge or tapered configuration in such a manner that the first surface is substantially smooth.

WO 01/21282 A2